



# AC TGSXC7

High-Efficiency, Split System Air Conditioner, Up To 17.2 SEER2, 2 To 5 Tons



- Nomenclature.....2
- Product Specifications.....3
- Expanded Cooling Data.....4
- Performance Data.....20
- Wiring Diagram.....22
- Dimensions.....23
- Accessories.....23



## Standard Features

- Two-Stage Copeland Ultra-Tech scroll compressor
- Quiet two-speed ECM outdoor fan motor
- Integrated communicating ComfortBridge™ Technology
- Commissioning and diagnostics via Bluetooth indoor board via CoolCloud™ App
- Copeland® ComfortAlert™ built in diagnostics
- Copper tube/enhanced aluminum fin coil - 5mm on 2.0-3.0T
- Color-coded terminal strip for non-communicating set-up
- Only two low-voltage wires required in communication mode
- Factory-installed high and low-pressure switches
- High-density foam compressor sound blanket
- Fully charged for 15' of tubing length
- Ambient temperature sensors
- Ground lug connection
- AHRI Certified - ETL Listed

## Cabinet Features





- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Heavy-gauge galvanized steel cabinet
- Baked-on powder-paint finish with 500-hour salt-spray approval
- Steel louver coil guard with rust-resistant screws
- Top and side maintenance access
- Single-panel access to controls with space for field-installed accessories
- Service valves with sweat connections and easy-access gauge ports
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

Proper sizing and installation of equipment is critical to achieving optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit [www.energystar.gov](http://www.energystar.gov).



\*Complete warranty details available from your local dealer or at [www.trioheatingandair.com](http://www.trioheatingandair.com). To receive the Lifetime Compressor Limited Warranty (good for as long as you own your home), 10-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

|                         | G   | S | X | C | 7 | 0 | 36  | 1 | 0  | A  | A                       |  |
|-------------------------|---|---|---|---|---|---|-----|---|----|----|-------------------------|--|
|                         | 1   | 2 | 3 | 4 | 5 | 6 | 7,8 | 9 | 10 | 11 | 12                      |  |
| <b>Brand</b>            | G Trio Heating & Air Brand  |   |   |   |   |   |     |   |    |    | <b>Minor Rev</b>        | A  |
| <b>Product Category</b> | S Split System R-410A   |   |   |   |   |   |     |   |    |    | <b>Major Revisions</b>  | A  |
| <b>Unit Type</b>        | X Condenser<br>Z Heat Pump  |   |   |   |   |   |     |   |    |    | <b>Electrical</b>       | 208/230 V, 1 Phase, 60 Hz  |
| <b>Feature</b>          | N Value      H Enhanced<br>B Classic     C Premium<br>M Multi-Family   V Ultimate   |   |   |   |   |   |     |   |    |    | <b>Nominal Capacity</b> | 18 - 1.5 Ton      42 - 3.5 Tons<br>24 - 2.0 Tons     48 - 4.0 Tons<br>30 - 2.5 Tons     60 - 5.0 Tons<br>36 - 3.0 Tons |
| <b>SEER2</b>            | 13.4 - 13.7 = 3      16.6 - 17.5 = 7<br>13.8 - 14.5 = 4      17.6 - 18.5 = 8<br>14.6 - 15.5 = 5      18.6 - 19.5 = 9<br>15.6 - 16.5 = 6      19.6 + = 0 |   |   |   |   |   |     |   |    |    | <b>Sales Region</b>     | N North<br>S Southeast & North<br>O All Regions  |

|  | GSXC7<br>02410A*  | GSXC7<br>03610A*  | GSXC7<br>04810A*  | GSXC7<br>06010A*  |
|--|---|---|---|---|
| <b>COOLING CAPACITY</b>                    |   |   |   |   |
| Nominal Cooling (BTU/h)                    | 24,000  | 36,000  | 48,000  | 60,000  |
| Decibels (High/Low)                        | 71  | 72  | 74  | 75  |
| <b>COMPRESSOR</b>                          |   |   |   |   |
| RLA  | 10.0  | 14.8  | 20.4  | 22.9  |
| LRA  | 62.9  | 84.2  | 122.1   | 147.2   |
| Stage                                      | Two   | Two   | Two   | Two   |
| Type                                       | Scroll  | Scroll  | Scroll  | Scroll  |
| <b>CONDENSER FAN MOTOR</b>                 |   |   |   |   |
| Motor Type                                 | ECM   | ECM   | ECM   | ECM   |
| Horsepower (RPM)                           | ⅓   | ⅓   | ⅓   | ⅓   |
| FLA  | 2.80  | 2.80  | 2.80  | 2.80  |
| <b>REFRIGERATION SYSTEM</b>                |   |   |   |   |
| Refrigerant Line Size <sup>1</sup>         |   |   |   |   |
| Liquid Line Size ("O.D.)                   | ⅜"  | ⅜"  | ⅜"  | ⅜"  |
| Suction Line Size ("O.D.)                  | ¾"  | ⅞"  | 1⅛"   | 1⅛"   |
| Refrigerant Connection Size                |   |   |   |   |
| Liquid Valve Size ("O.D.)                  | ⅜"  | ⅜"  | ⅜"  | ⅜"  |
| Suction Valve Size ("O.D.") <sup>2,3</sup> | ¾"  | ¾"  | ⅞"  | ⅞"  |
| Valve Connection Type                      | Sweat   | Sweat   | Sweat   | Sweat   |
| Refrigerant Charge <sup>4</sup>            | 105   | 109   | 195   | 209   |
| Expansion Device                           | TXV   | TXV   | TXV   | TXV   |
| <b>ELECTRICAL DATA</b>                     |   |   |   |   |
| Voltage-Phase-Hz                           | 208/230-1   | 208/230-1   | 208/230-1   | 208/230-1   |
| Minimum Circuit Ampacity <sup>5</sup>      | 15.3  | 24.1  | 28.3  | 34.8  |
| Max. Overcurrent Protection <sup>6</sup>   | 25  | 40  | 45  | 60  |
| Min / Max Volts                            | 197 / 253   | 197 / 253   | 197 / 253   | 197 / 253   |
| Electrical Conduit Size                    | ½" or ¾"  | ½" or ¾"  | ½" or ¾"  | ½" or ¾"  |
| <b>EQUIPMENT WEIGHT (LBS)</b>              | 214   | 216   | 276   | 283   |
| <b>SHIP WEIGHT (LBS)</b>                   | 236   | 238   | 298   | 305   |
| <b>ENERGY STAR® CERTIFIED ^</b>            |  |  |  |  |

**^ ENERGY STAR NOTES**

- Proper sizing and installation of equipment is critical to achieving optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR® criteria. Ask your contractor for details or visit [www.energystar.gov](http://www.energystar.gov).
- The [www.energystar.gov](http://www.energystar.gov) website provides up-to-date system combinations certified to meet ENERGY STAR® requirements.

<sup>1</sup> Line sizes denoted for 25' line sets, tested and rated in accordance with ARI Standard 210/240. For other line set lengths or sizes, refer to the Installation Instructions and/or the Long Line Set Applications guide.

<sup>2</sup> Installer will need to supply ¾" to ⅞" adapters for suction line connections.

<sup>3</sup> Installer will need to supply ⅞" to 1⅛" adapters for suction line connections.

<sup>4</sup> Unit is factory charged with refrigerant for 15' of ⅜" liquid line. System charge must be adjusted per the Final Charge Adjustment procedure found in the Installation Instructions.

<sup>5</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>6</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.

EXPANDED COOLING DATA — GSXC702410A\* +CA\*TA2422\*4A\* +EEP - HIGH STAGE

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      | ENTERING INDOOR WET BULB TEMPERATURE |      |      |      |       |      |      |      |       |      |      |    |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|--------------------------------------|------|------|------|-------|------|------|------|-------|------|------|----|
|       |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F                                 |      |      |      | 105°F |      |      |      | 115°F |      |      |    |
|       |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59                                   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71 |
| 70    | MBh     | 23.2                        | 23.5 | 24.2 | -    | 23.0 | 23.3 | 24.0 | -    | 22.4 | 22.7 | 23.4 | -    | 21.3                                 | 21.7 | 22.4 | -    | 20.1  | 20.4 | 21.1 | -    | 18.9  | 19.2 | 19.9 | -  |
|       | S/T     | 0.58                        | 0.51 | 0.38 | -    | 0.59 | 0.52 | 0.39 | -    | 0.61 | 0.54 | 0.41 | -    | 0.63                                 | 0.56 | 0.43 | -    | 1.00  | 0.58 | 0.45 | -    | 1.00  | 0.63 | 0.50 | -  |
|       | ΔT      | 19                          | 17   | 14   | -    | 19   | 17   | 14   | -    | 19   | 17   | 14   | -    | 19                                   | 17   | 14   | -    | 18    | 17   | 13   | -    | 20    | 18   | 15   | -  |
|       | kW      | 1.41                        | 1.41 | 1.41 | -    | 1.56 | 1.56 | 1.56 | -    | 1.73 | 1.73 | 1.72 | -    | 1.91                                 | 1.91 | 1.90 | -    | 2.11  | 2.11 | 2.10 | -    | 2.34  | 2.34 | 2.34 | -  |
|       | Amps    | 4.6                         | 4.6  | 4.6  | -    | 5.3  | 5.2  | 5.2  | -    | 6.0  | 6.0  | 6.0  | -    | 6.8                                  | 6.7  | 6.7  | -    | 7.6   | 7.6  | 7.6  | -    | 8.6   | 8.6  | 8.6  | -  |
|       | Hi PR   | 231                         | 232  | 234  | -    | 268  | 269  | 270  | -    | 306  | 307  | 308  | -    | 347                                  | 348  | 350  | -    | 391   | 392  | 394  | -    | 439   | 440  | 441  | -  |
|       | Lo PR   | 123                         | 124  | 127  | -    | 130  | 132  | 135  | -    | 137  | 138  | 141  | -    | 142                                  | 144  | 147  | -    | 148   | 149  | 152  | -    | 154   | 156  | 159  | -  |
|       | MBh     | 23.5                        | 23.8 | 24.5 | -    | 23.3 | 23.6 | 24.3 | -    | 22.7 | 23.0 | 23.7 | -    | 21.6                                 | 22.0 | 22.7 | -    | 20.4  | 20.7 | 21.4 | -    | 19.2  | 19.5 | 20.2 | -  |
|       | S/T     | 0.64                        | 0.57 | 0.44 | -    | 0.65 | 0.57 | 0.44 | -    | 0.67 | 0.60 | 0.47 | -    | 1.00                                 | 0.62 | 0.49 | -    | 1.00  | 0.64 | 0.51 | -    | 1.00  | 0.69 | 0.56 | -  |
|       | ΔT      | 18                          | 16   | 13   | -    | 18   | 16   | 13   | -    | 18   | 16   | 13   | -    | 18                                   | 16   | 13   | -    | 17    | 16   | 12   | -    | 18    | 17   | 14   | -  |
| kW    | 1.42    | 1.42                        | 1.42 | -    | 1.57 | 1.57 | 1.56 | -    | 1.73 | 1.73 | 1.73 | -    | 1.91 | 1.91                                 | 1.91 | -    | 2.11 | 2.11  | 2.11 | -    | 2.35 | 2.35  | 2.35 | -    |    |
| Amps  | 4.6     | 4.6                         | 4.6  | -    | 5.3  | 5.3  | 5.3  | -    | 6.0  | 6.0  | 6.0  | -    | 6.8  | 6.8                                  | 6.8  | -    | 7.7  | 7.7   | 7.6  | -    | 8.7  | 8.7   | 8.7  | -    |    |
| Hi PR | 233     | 234                         | 236  | -    | 270  | 271  | 272  | -    | 308  | 309  | 310  | -    | 349  | 350                                  | 352  | -    | 393  | 394   | 396  | -    | 441  | 442   | 443  | -    |    |
| Lo PR | 124     | 126                         | 129  | -    | 132  | 133  | 136  | -    | 138  | 140  | 143  | -    | 144  | 145                                  | 149  | -    | 149  | 151   | 154  | -    | 156  | 158   | 161  | -    |    |
| MBh   | 23.8    | 24.1                        | 24.8 | -    | 23.6 | 23.9 | 24.6 | -    | 23.0 | 23.3 | 24.0 | -    | 21.9 | 22.3                                 | 23.0 | -    | 20.7 | 21.0  | 21.7 | -    | 19.5 | 19.8  | 20.5 | -    |    |
| S/T   | 0.67    | 0.60                        | 0.46 | -    | 0.67 | 0.60 | 0.47 | -    | 0.70 | 0.63 | 0.49 | -    | 1.00 | 0.64                                 | 0.51 | -    | 1.00 | 0.67  | 0.53 | -    | 1.00 | 0.71  | 0.58 | -    |    |
| ΔT    | 17      | 15                          | 12   | -    | 17   | 15   | 12   | -    | 17   | 15   | 12   | -    | 17   | 15                                   | 12   | -    | 17   | 15    | 12   | -    | 18   | 16    | 13   | -    |    |
| kW    | 1.43    | 1.42                        | 1.42 | -    | 1.57 | 1.57 | 1.57 | -    | 1.74 | 1.74 | 1.74 | -    | 1.92 | 1.92                                 | 1.92 | -    | 2.12 | 2.12  | 2.12 | -    | 2.36 | 2.35  | 2.35 | -    |    |
| Amps  | 4.7     | 4.7                         | 4.6  | -    | 5.3  | 5.3  | 5.3  | -    | 6.0  | 6.0  | 6.0  | -    | 6.8  | 6.8                                  | 6.8  | -    | 7.7  | 7.7   | 7.7  | -    | 8.7  | 8.7   | 8.7  | -    |    |
| Hi PR | 235     | 236                         | 237  | -    | 271  | 272  | 274  | -    | 309  | 310  | 312  | -    | 350  | 351                                  | 353  | -    | 395  | 396   | 397  | -    | 442  | 443   | 445  | -    |    |
| Lo PR | 126     | 127                         | 131  | -    | 133  | 135  | 138  | -    | 140  | 141  | 145  | -    | 145  | 147                                  | 150  | -    | 151  | 152   | 156  | -    | 158  | 159   | 162  | -    |    |

|       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |
|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| 75    | MBh   | 23.2 | 23.5 | 24.2  | 25.3  | 23.0 | 23.3 | 24.0  | 25.1  | 22.4 | 22.7 | 23.4  | 24.5  | 21.4 | 21.7 | 22.4  | 23.4  | 20.1 | 20.4 | 21.1  | 22.2  | 18.9 | 19.2 | 19.9  | 21.0  |
|       | S/T   | 0.71 | 0.63 | 0.50  | 0.4   | 0.71 | 0.64 | 0.51  | 0.4   | 1.00 | 0.66 | 0.53  | 0.4   | 1.00 | 0.68 | 0.55  | 0.4   | 1.00 | 0.70 | 0.57  | 0.4   | 1.00 | 1.00 | 0.62  | 0.5   |
|       | ΔT    | 23   | 21   | 18    | 14    | 22   | 21   | 18    | 14    | 23   | 21   | 18    | 14    | 22   | 21   | 18    | 14    | 22   | 21   | 17    | 14    | 23   | 22   | 18    | 15    |
|       | kW    | 1.41 | 1.41 | 1.41  | 1.4   | 1.56 | 1.56 | 1.56  | 1.6   | 1.73 | 1.72 | 1.72  | 1.7   | 1.91 | 1.90 | 1.90  | 1.9   | 2.11 | 2.10 | 2.10  | 2.1   | 2.34 | 2.34 | 2.34  | 2.3   |
|       | Amps  | 4.6  | 4.6  | 4.6   | 4.6   | 5.2  | 5.2  | 5.2   | 5.3   | 6.0  | 6.0  | 6.0   | 6.0   | 6.7  | 6.7  | 6.7   | 6.8   | 7.6  | 7.6  | 7.6   | 7.7   | 8.6  | 8.6  | 8.6   | 8.7   |
|       | Hi PR | 231  | 232  | 234   | 238.0 | 268  | 269  | 270   | 274.4 | 306  | 307  | 309   | 312.6 | 347  | 348  | 350   | 353.8 | 391  | 392  | 394   | 398.1 | 439  | 440  | 441   | 445.5 |
|       | Lo PR | 123  | 124  | 127   | 132.5 | 130  | 132  | 135   | 139.9 | 137  | 138  | 141   | 146.5 | 142  | 144  | 147   | 152.0 | 148  | 149  | 152   | 157.4 | 154  | 156  | 159   | 164.2 |
|       | MBh   | 23.5 | 23.8 | 24.5  | 25.6  | 23.3 | 23.6 | 24.3  | 25.4  | 22.7 | 23.0 | 23.7  | 24.8  | 21.7 | 22.0 | 22.7  | 23.7  | 20.4 | 20.7 | 21.4  | 22.5  | 19.2 | 19.6 | 20.2  | 21.3  |
|       | S/T   | 0.76 | 0.69 | 0.56  | 0.4   | 0.77 | 0.70 | 0.57  | 0.4   | 1.00 | 0.72 | 0.59  | 0.5   | 1.00 | 0.74 | 0.61  | 0.5   | 1.00 | 0.76 | 0.63  | 0.5   | 1.00 | 1.00 | 0.68  | 0.5   |
|       | ΔT    | 21   | 20   | 17    | 13    | 21   | 20   | 16    | 13    | 22   | 20   | 17    | 13    | 21   | 20   | 16    | 13    | 21   | 19   | 16    | 13    | 22   | 21   | 17    | 14    |
| kW    | 1.42  | 1.42 | 1.42 | 1.43  | 1.57  | 1.57 | 1.56 | 1.58  | 1.73  | 1.73 | 1.73 | 1.74  | 1.91  | 1.91 | 1.91 | 1.92  | 2.11  | 2.11 | 2.11 | 2.12  | 2.35  | 2.35 | 2.35 | 2.36  |       |
| Amps  | 4.6   | 4.6  | 4.6  | 4.7   | 5.3   | 5.3  | 5.3  | 5.3   | 6.0   | 6.0  | 6.0  | 6.0   | 6.8   | 6.8  | 6.8  | 6.8   | 7.7   | 7.6  | 7.6  | 7.7   | 8.7   | 8.7  | 8.7  | 8.7   |       |
| Hi PR | 233   | 234  | 236  | 239.9 | 270   | 271  | 272  | 276.4 | 308   | 309  | 311  | 314.6 | 349   | 350  | 352  | 355.7 | 393   | 394  | 396  | 400.1 | 441   | 442  | 443  | 447.4 |       |
| Lo PR | 124   | 126  | 129  | 134.3 | 132   | 133  | 137  | 141.7 | 138   | 140  | 143  | 148.3 | 144   | 145  | 149  | 153.8 | 149   | 151  | 154  | 159.2 | 156   | 158  | 161  | 166.0 |       |
| MBh   | 23.8  | 24.1 | 24.8 | 25.9  | 23.6  | 23.9 | 24.6 | 25.7  | 23.0  | 23.3 | 24.0 | 25.1  | 21.9  | 22.3 | 23.0 | 24.0  | 20.7  | 21.0 | 21.7 | 22.8  | 19.5  | 19.8 | 20.5 | 21.6  |       |
| S/T   | 0.79  | 0.72 | 0.59 | 0.5   | 1.00  | 0.73 | 0.59 | 0.5   | 1.00  | 0.75 | 0.62 | 0.5   | 1.00  | 0.77 | 0.64 | 0.5   | 1.00  | 0.79 | 0.66 | 0.5   | 1.00  | 1.00 | 0.71 | 0.6   |       |
| ΔT    | 21    | 19   | 16   | 12    | 21    | 19   | 16   | 12    | 21    | 19   | 16   | 13    | 21    | 19   | 16   | 12    | 20    | 19   | 16   | 12    | 22    | 20   | 17   | 13    |       |
| kW    | 1.42  | 1.42 | 1.42 | 1.4   | 1.57  | 1.57 | 1.57 | 1.6   | 1.74  | 1.74 | 1.73 | 1.7   | 1.92  | 1.92 | 1.91 | 1.9   | 2.12  | 2.12 | 2.12 | 2.1   | 2.35  | 2.35 | 2.35 | 2.4   |       |
| Amps  | 4.7   | 4.7  | 4.6  | 4.7   | 5.3   | 5.3  | 5.3  | 5.3   | 6.0   | 6.0  | 6.0  | 6.1   | 6.8   | 6.8  | 6.8  | 6.8   | 7.7   | 7.7  | 7.7  | 7.7   | 8.7   | 8.7  | 8.7  | 8.7   |       |
| Hi PR | 235   | 236  | 237  | 241.4 | 271   | 272  | 274  | 277.9 | 309   | 310  | 312  | 316.1 | 351   | 352  | 353  | 357.3 | 395   | 396  | 398  | 401.6 | 442   | 443  | 445  | 448.9 |       |
| Lo PR | 126   | 128  | 131  | 135.8 | 133   | 135  | 138  | 143.3 | 140   | 141  | 145  | 149.8 | 146   | 147  | 150  | 155.4 | 151   | 152  | 156  | 160.8 | 158   | 159  | 162  | 167.6 |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSXC702410A\* +CA\*TA2422\*4A\* +EEP - HIGH STAGE (CONT.)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |       |       |       |       |      |       |       |       |      |       |       | 105°F |      |       |       |       |      |       |       |       |      |       |       | 115°F |      |       |       |       |      |       |       |       |      |       |       |       |      |       |       |       |      |       |       |       |      |       |       |       |      |
|-------|---------|-----------------------------|-------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|
|       |         | 65°F                        |       |       |       |       |      | 75°F  |       |       |      |       |       | 85°F  |      |       |       |       |      | 95°F  |       |       |      |       |       | 105°F |      |       |       |       |      | 115°F |       |       |      |       |       |       |      |       |       |       |      |       |       |       |      |       |       |       |      |
|       |         | 59                          | 63    | 67    | 71    | 75    | 79   | 59    | 63    | 67    | 71   | 75    | 79    | 59    | 63   | 67    | 71    | 75    | 79   | 59    | 63    | 67    | 71   | 75    | 79    | 59    | 63   | 67    | 71    | 75    | 79   | 59    | 63    | 67    | 71   | 75    | 79    |       |      |       |       |       |      |       |       |       |      |       |       |       |      |
| 80    | 700     | MBh                         | 23.3  | 23.7  | 24.4  | 25.4  | 23.1 | 23.5  | 24.1  | 25.2  | 22.5 | 22.8  | 23.5  | 24.6  | 21.5 | 21.8  | 22.5  | 23.6  | 20.2 | 20.5  | 21.2  | 22.3  | 19.0 | 19.4  | 20.1  | 21.1  | 20.2 | 20.5  | 21.2  | 22.3  | 19.0 | 19.4  | 20.1  | 21.1  | 20.2 | 20.5  | 21.2  | 22.3  | 19.0 | 19.4  | 20.1  | 21.1  | 20.2 | 20.5  | 21.2  | 22.3  | 19.0 | 19.4  | 20.1  | 21.1  |      |
|       |         | S/T                         | 1.00  | 0.75  | 0.62  | 0.5   | 1.00 | 0.78  | 0.65  | 0.5   | 1.00 | 0.80  | 0.67  | 0.5   | 1.00 | 0.80  | 0.67  | 0.5   | 1.00 | 1.00  | 1.00  | 0.69  | 0.6  | 1.00  | 1.00  | 0.74  | 0.6  | 1.00  | 1.00  | 0.69  | 0.6  | 1.00  | 1.00  | 0.74  | 0.6  | 1.00  | 1.00  | 0.69  | 0.6  | 1.00  | 1.00  | 0.74  | 0.6  | 1.00  | 1.00  | 0.69  | 0.6  | 1.00  | 1.00  | 0.74  | 0.6  |
|       |         | ΔT                          | 26    | 25    | 21    | 18    | 26   | 25    | 21    | 18    | 27   | 25    | 21    | 18    | 26   | 25    | 21    | 18    | 26   | 24    | 24    | 21    | 18   | 27    | 25    | 22    | 19   | 26    | 24    | 21    | 18   | 26    | 24    | 21    | 18   | 26    | 24    | 21    | 18   | 26    | 24    | 21    | 18   | 26    | 24    | 21    | 18   | 26    | 24    | 21    | 18   |
|       |         | kW                          | 1.41  | 1.41  | 1.41  | 1.4   | 1.56 | 1.56  | 1.56  | 1.6   | 1.73 | 1.73  | 1.72  | 1.7   | 1.91 | 1.90  | 1.90  | 1.9   | 2.11 | 2.11  | 2.11  | 2.10  | 2.1  | 2.34  | 2.34  | 2.34  | 2.3  | 2.11  | 2.11  | 2.10  | 2.1  | 2.34  | 2.34  | 2.34  | 2.3  | 2.11  | 2.11  | 2.10  | 2.1  | 2.34  | 2.34  | 2.34  | 2.3  | 2.11  | 2.11  | 2.10  | 2.1  | 2.34  | 2.34  | 2.34  | 2.3  |
|       |         | Amps                        | 4.6   | 4.6   | 4.6   | 4.6   | 5.3  | 5.2   | 5.2   | 5.3   | 6.0  | 6.0   | 6.0   | 6.0   | 6.8  | 6.7   | 6.7   | 6.8   | 7.6  | 7.6   | 7.6   | 7.6   | 7.7  | 8.6   | 8.6   | 8.6   | 8.7  | 7.6   | 7.6   | 7.6   | 7.7  | 8.6   | 8.6   | 8.6   | 8.7  | 7.6   | 7.6   | 7.6   | 7.7  | 8.6   | 8.6   | 8.6   | 8.7  | 7.6   | 7.6   | 7.6   | 7.7  | 8.6   | 8.6   | 8.6   | 8.7  |
|       |         | Hi PR                       | 233   | 233   | 234   | 238.4 | 268  | 269   | 271   | 274.9 | 306  | 307   | 309   | 313.1 | 348  | 349   | 350   | 354.2 | 392  | 393   | 395   | 398.6 | 439  | 440   | 442   | 445.9 | 392  | 393   | 395   | 398.6 | 439  | 440   | 442   | 445.9 | 392  | 393   | 395   | 398.6 | 439  | 440   | 442   | 445.9 | 392  | 393   | 395   | 398.6 | 439  | 440   | 442   | 445.9 |      |
|       | Lo PR   | 123                         | 125   | 128   | 133.0 | 131   | 132  | 135   | 140.5 | 137   | 139  | 142   | 147.0 | 143   | 144  | 147   | 152.5 | 148   | 150  | 153   | 157.9 | 155   | 156  | 160   | 164.7 | 148   | 150  | 153   | 157.9 | 155   | 156  | 160   | 164.7 | 148   | 150  | 153   | 157.9 | 155   | 156  | 160   | 164.7 | 148   | 150  | 153   | 157.9 | 155   | 156  | 160   | 164.7 |       |      |
|       | 800     | MBh                         | 23.6  | 24.0  | 24.7  | 25.7  | 23.4 | 23.8  | 24.4  | 25.5  | 22.8 | 23.1  | 23.8  | 24.9  | 21.8 | 22.1  | 22.8  | 23.9  | 20.5 | 20.8  | 21.5  | 22.6  | 19.3 | 19.7  | 20.4  | 21.4  | 20.5 | 20.8  | 21.5  | 22.6  | 19.3 | 19.7  | 20.4  | 21.4  | 20.5 | 20.8  | 21.5  | 22.6  | 19.3 | 19.7  | 20.4  | 21.4  | 20.5 | 20.8  | 21.5  | 22.6  | 19.3 | 19.7  | 20.4  | 21.4  |      |
|       |         | S/T                         | 1.00  | 0.81  | 0.68  | 0.5   | 1.00 | 0.82  | 0.69  | 0.6   | 1.00 | 0.84  | 0.71  | 0.6   | 1.00 | 1.00  | 0.73  | 0.6   | 1.00 | 1.00  | 0.75  | 0.6   | 1.00 | 1.00  | 0.80  | 0.7   | 1.00 | 1.00  | 0.75  | 0.6   | 1.00 | 1.00  | 0.80  | 0.7   | 1.00 | 1.00  | 0.75  | 0.6   | 1.00 | 1.00  | 0.80  | 0.7   | 1.00 | 1.00  | 0.75  | 0.6   | 1.00 | 1.00  | 0.80  | 0.7   |      |
|       |         | ΔT                          | 25    | 24    | 20    | 17    | 25   | 24    | 20    | 17    | 26   | 24    | 21    | 17    | 25   | 24    | 20    | 17    | 25   | 23    | 20    | 17    | 26   | 24    | 21    | 18    | 25   | 23    | 20    | 17    | 26   | 24    | 21    | 18    | 25   | 23    | 20    | 17    | 26   | 24    | 21    | 18    | 25   | 23    | 20    | 17    | 26   | 24    | 21    | 18    |      |
|       |         | kW                          | 1.42  | 1.42  | 1.42  | 1.43  | 1.57 | 1.57  | 1.56  | 1.58  | 1.73 | 1.73  | 1.73  | 1.74  | 1.74 | 1.91  | 1.91  | 1.91  | 1.92 | 2.11  | 2.11  | 2.11  | 2.12 | 2.35  | 2.35  | 2.35  | 2.36 | 2.11  | 2.11  | 2.11  | 2.12 | 2.35  | 2.35  | 2.35  | 2.36 | 2.11  | 2.11  | 2.11  | 2.12 | 2.35  | 2.35  | 2.35  | 2.36 | 2.11  | 2.11  | 2.11  | 2.12 | 2.35  | 2.35  | 2.35  | 2.36 |
|       |         | Amps                        | 4.6   | 4.6   | 4.6   | 4.7   | 5.3  | 5.3   | 5.3   | 5.3   | 6.0  | 6.0   | 6.0   | 6.0   | 6.8  | 6.8   | 6.8   | 6.8   | 7.7  | 7.7   | 7.7   | 7.7   | 8.7  | 8.7   | 8.7   | 8.7   | 7.7  | 7.7   | 7.7   | 7.7   | 8.7  | 8.7   | 8.7   | 8.7   | 7.7  | 7.7   | 7.7   | 7.7   | 8.7  | 8.7   | 8.7   | 8.7   | 7.7  | 7.7   | 7.7   | 7.7   | 8.7  | 8.7   | 8.7   | 8.7   |      |
| Hi PR |         | 234                         | 235   | 236   | 240.4 | 270   | 271  | 273   | 276.8 | 308   | 309  | 311   | 315.0 | 350   | 351  | 352   | 356.2 | 394   | 395  | 396   | 400.5 | 441   | 442  | 444   | 447.8 | 394   | 395  | 396   | 400.5 | 441   | 442  | 444   | 447.8 | 394   | 395  | 396   | 400.5 | 441   | 442  | 444   | 447.8 | 394   | 395  | 396   | 400.5 | 441   | 442  | 444   | 447.8 |       |      |
| Lo PR | 125     | 126                         | 130   | 134.8 | 132   | 134   | 137  | 142.3 | 139   | 140   | 144  | 148.8 | 144   | 146   | 149  | 154.3 | 150   | 151   | 155  | 159.7 | 157   | 158   | 161  | 166.5 | 149   | 151   | 155  | 159.7 | 157   | 158   | 161  | 166.5 | 149   | 151   | 155  | 159.7 | 157   | 158   | 161  | 166.5 | 149   | 151   | 155  | 159.7 | 157   | 158   | 161  | 166.5 |       |       |      |
| 880   | MBh     | 23.9                        | 24.2  | 24.9  | 26.0  | 23.7  | 24.0 | 24.7  | 25.8  | 23.1  | 23.4 | 24.1  | 25.2  | 22.1  | 22.4 | 23.1  | 24.1  | 20.8  | 21.1 | 21.8  | 22.9  | 19.6  | 20.0 | 20.7  | 21.7  | 20.8  | 21.1 | 21.8  | 22.9  | 19.6  | 20.0 | 20.7  | 21.7  | 20.8  | 21.1 | 21.8  | 22.9  | 19.6  | 20.0 | 20.7  | 21.7  | 20.8  | 21.1 | 21.8  | 22.9  | 19.6  | 20.0 | 20.7  | 21.7  |       |      |
|       | S/T     | 1.00                        | 0.84  | 0.71  | 0.6   | 1.00  | 0.85 | 0.72  | 0.6   | 1.00  | 0.87 | 0.74  | 0.6   | 1.00  | 1.00 | 0.76  | 0.6   | 1.00  | 1.00 | 0.78  | 0.6   | 1.00  | 1.00 | 0.83  | 0.7   | 1.00  | 1.00 | 0.78  | 0.6   | 1.00  | 1.00 | 0.83  | 0.7   | 1.00  | 1.00 | 0.78  | 0.6   | 1.00  | 1.00 | 0.83  | 0.7   | 1.00  | 1.00 | 0.78  | 0.6   | 1.00  | 1.00 | 0.83  | 0.7   |       |      |
|       | ΔT      | 25                          | 23    | 20    | 16    | 25    | 23   | 20    | 16    | 25    | 23   | 20    | 16    | 25    | 23   | 20    | 16    | 24    | 23   | 19    | 16    | 25    | 24   | 20    | 17    | 24    | 23   | 19    | 16    | 25    | 24   | 20    | 17    | 24    | 23   | 19    | 16    | 25    | 24   | 20    | 17    | 24    | 23   | 19    | 16    | 25    | 24   | 20    | 17    |       |      |
|       | kW      | 1.42                        | 1.42  | 1.42  | 1.4   | 1.57  | 1.57 | 1.57  | 1.6   | 1.74  | 1.74 | 1.74  | 1.7   | 1.92  | 1.92 | 1.92  | 1.9   | 2.12  | 2.12 | 2.12  | 2.1   | 2.35  | 2.35 | 2.35  | 2.4   | 2.12  | 2.12 | 2.12  | 2.1   | 2.35  | 2.35 | 2.35  | 2.4   | 2.12  | 2.12 | 2.12  | 2.1   | 2.35  | 2.35 | 2.35  | 2.4   | 2.12  | 2.12 | 2.12  | 2.1   | 2.35  | 2.35 | 2.35  | 2.4   |       |      |
|       | Amps    | 4.7                         | 4.7   | 4.6   | 4.7   | 5.3   | 5.3  | 5.3   | 5.3   | 6.0   | 6.0  | 6.0   | 6.1   | 6.8   | 6.8  | 6.8   | 6.8   | 7.7   | 7.7  | 7.7   | 7.7   | 8.7   | 8.7  | 8.7   | 8.7   | 7.7   | 7.7  | 7.7   | 7.7   | 8.7   | 8.7  | 8.7   | 8.7   | 7.7   | 7.7  | 7.7   | 7.7   | 8.7   | 8.7  | 8.7   | 8.7   | 7.7   | 7.7  | 7.7   | 7.7   | 8.7   | 8.7  | 8.7   | 8.7   |       |      |
|       | Hi PR   | 235                         | 236   | 238   | 241.9 | 272   | 273  | 274   | 278.3 | 310   | 311  | 313   | 316.5 | 351   | 352  | 354   | 357.7 | 395   | 396  | 398   | 402.0 | 443   | 444  | 445   | 449.4 | 395   | 396  | 398   | 402.0 | 443   | 444  | 445   | 449.4 | 395   | 396  | 398   | 402.0 | 443   | 444  | 445   | 449.4 | 395   | 396  | 398   | 402.0 | 443   | 444  | 445   | 449.4 |       |      |
| Lo PR | 127     | 128                         | 131   | 136.4 | 134   | 136   | 139  | 143.8 | 141   | 142   | 145  | 150.4 | 146   | 148   | 151  | 155.9 | 151   | 153   | 156  | 161.3 | 158   | 160   | 163  | 168.1 | 151   | 153   | 156  | 161.3 | 158   | 160   | 163  | 168.1 | 151   | 153   | 156  | 161.3 | 158   | 160   | 163  | 168.1 | 151   | 153   | 156  | 161.3 | 158   | 160   | 163  | 168.1 |       |       |      |
| 85    | 700     | MBh                         | 800.0 | 24.0  | 24.7  | 25.8  | 23.5 | 23.8  | 24.5  | 25.6  | 22.9 | 23.2  | 23.9  | 25.0  | 21.9 | 22.2  | 22.9  | 23.9  | 20.6 | 20.9  | 21.6  | 22.7  | 19.4 | 19.8  | 20.4  | 21.5  | 20.6 | 20.9  | 21.6  | 22.7  | 19.4 | 19.8  | 20.4  | 21.5  | 20.6 | 20.9  | 21.6  | 22.7  | 19.4 | 19.8  | 20.4  | 21.5  | 20.6 | 20.9  | 21.6  | 22.7  | 19.4 | 19.8  | 20.4  | 21.5  |      |
|       |         | S/T                         | 1.00  | 0.85  | 0.72  | 0.6   | 1.00 | 0.86  | 0.73  | 0.6   | 1.00 | 0.88  | 0.75  | 0.6   | 1.00 | 1.00  | 0.77  | 0.6   | 1.00 | 1.00  | 0.79  | 0.7   | 1.00 | 1.00  | 1.00  | 0.7   | 1.00 | 1.00  | 0.79  | 0.7   | 1.00 | 1.00  | 1.00  | 0.7   | 1.00 | 1.00  | 0.79  | 0.7   | 1.00 | 1.00  | 1.00  | 0.7   | 1.00 | 1.00  | 0.79  | 0.7   | 1.00 | 1.00  | 1.00  | 0.7   |      |
|       |         | ΔT                          | 30    | 28    | 25    | 21    | 30   | 28    | 25    | 21    | 30   | 28    | 25    | 22    | 30   | 28    | 25    | 21    | 29   | 28    | 25    | 21    | 31   | 29    | 26    | 22    | 29   | 28    | 25    | 21    | 31   | 29    | 26    | 22    | 29   | 28    | 25    | 21    | 31   | 29    | 26    | 22    | 29   | 28    | 25    | 21    | 31   | 29    | 26    | 22    |      |
|       |         | kW                          | 1.41  | 1.41  | 1.41  | 1.4   | 1.56 | 1.56  | 1.56  | 1.6   | 1.73 | 1.73  | 1.73  | 1.7   | 1.91 | 1.91  | 1.91  | 1.9   | 2.11 | 2.11  | 2.11  | 2.1   | 2.34 | 2.34  | 2.34  | 2.4   | 2.11 | 2.11  | 2.11  | 2.1   | 2.34 | 2.34  | 2.34  | 2.4   | 2.11 | 2.11  | 2.11  | 2.1   | 2.34 | 2.34  | 2.34  | 2.4   | 2.11 | 2.11  | 2.11  | 2.1   | 2.34 | 2.34  | 2.34  | 2.4   |      |
|       |         | Amps                        | 4.6   | 4.6   | 4.6   | 4.6   | 5.3  | 5.3   | 5.2   | 5.3   | 6.0  | 6.0   | 6.0   | 6.0   | 6.8  | 6.8   | 6.8   | 6.8   | 7.6  | 7.6   | 7.6   | 7.6   | 8.6  | 8.6   | 8.6   | 8.7   | 7.6  | 7.6   | 7.6   | 7.7   | 8.6  | 8.6   | 8.6   | 8.7   | 7.6  | 7.6   | 7.6   | 7.7   | 8.6  | 8.6   | 8.6   | 8.7   | 7.6  | 7.6   | 7.6   | 7.7   | 8.6  | 8.6   | 8.6   | 8.7   |      |
|       |         | Hi PR                       | 233   | 234   | 235   | 239.5 | 269  | 270   | 272   | 275.9 | 307  | 308   | 310   | 314.1 | 349  | 350   | 351   | 355.3 | 393  | 394   | 396   | 399.6 | 440  | 441   | 443   | 447.0 | 393  | 394   | 396   | 399.6 | 440  | 441   | 443   | 447.0 | 393  | 394   | 396   | 399.6 | 440  | 441   | 443   | 447.0 | 393  | 394   | 396   | 399.6 | 440  | 441   | 443   | 447.0 |      |
|       | Lo PR   | 125                         | 127   | 130   | 134.8 | 132   | 134  | 137   | 142.3 | 139   | 140  | 144   | 148.8 | 145   | 146  | 149   | 154.4 | 150   | 151  | 155   | 159.8 | 157   | 158  | 161   | 166.6 | 149   | 151  | 155   | 159.8 | 157   | 158  | 161   | 166.6 | 149   | 151  | 155   | 159.8 | 157   | 158  | 161   | 166.6 | 149   | 151  | 155   | 159.8 |       |      |       |       |       |      |

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |       |       |      |      |       |       |      |      |       | ENTERING INDOOR WET BULB TEMPERATURE |      |      |       |       |      |      |       |       |      |      |       |       |      |
|-----|---------|-----------------------------|------|------|-------|-------|------|------|-------|-------|------|------|-------|--------------------------------------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|
|     |         | 65°F                        |      |      |       | 75°F  |      |      |       | 85°F  |      |      |       | 95°F                                 |      |      |       | 105°F |      |      |       | 115°F |      |      |       |       |      |
|     |         | 59                          | 63   | 67   | 71    | 59    | 63   | 67   | 71    | 59    | 63   | 67   | 71    | 59                                   | 63   | 67   | 71    | 59    | 63   | 67   | 71    | 59    | 63   | 67   | 71    |       |      |
| 70  | 500     | MBh                         | 16.7 | 16.9 | 17.4  | -     | 16.5 | 16.8 | 17.3  | -     | 16.1 | 16.3 | 16.8  | -                                    | 15.4 | 15.6 | 16.1  | -     | 14.4 | 14.7 | 15.2  | 0.0   | 13.6 | 13.8 | 14.3  | -     |      |
|     |         | S/T                         | 0.60 | 0.53 | 0.40  | -     | 0.61 | 0.54 | 0.40  | -     | 0.64 | 0.56 | 0.43  | -                                    | 1.00 | 0.58 | 0.45  | -     | 1.00 | 0.60 | 0.47  | 0.0   | 1.00 | 0.65 | 0.52  | -     |      |
|     |         | ΔT                          | 18   | 16   | 13    | -     | 18   | 16   | 13    | -     | 18   | 17   | 13    | -                                    | 18   | 16   | 13    | -     | 18   | 16   | 13    | 0     | 19   | 17   | 14    | -     |      |
|     |         | KW                          | 0.89 | 0.89 | 0.89  | -     | 0.98 | 0.98 | 0.98  | -     | 1.09 | 1.09 | 1.08  | -                                    | 1.20 | 1.20 | 1.20  | -     | 1.33 | 1.32 | 1.32  | 0.0   | 1.47 | 1.47 | 1.47  | -     |      |
|     |         | Amps                        | 2.9  | 2.9  | 2.9   | -     | 3.3  | 3.3  | 3.3   | -     | 3.8  | 3.8  | 3.7   | -                                    | 4.2  | 4.2  | 4.2   | -     | 4.8  | 4.8  | 4.8   | 0.0   | 5.4  | 5.4  | 5.4   | -     |      |
|     | 565     | Hi PR                       | 221  | 222  | 224   | -     | 256  | 257  | 258   | -     | 292  | 293  | 295   | -                                    | 332  | 333  | 334   | -     | 374  | 375  | 377   | 0.0   | 419  | 420  | 422   | -     |      |
|     |         | Lo PR                       | 126  | 128  | 131   | -     | 134  | 135  | 139   | -     | 141  | 142  | 145   | -                                    | 146  | 148  | 151   | -     | 152  | 153  | 157   | 0.0   | 159  | 160  | 164   | -     |      |
|     |         | MBh                         | 16.9 | 17.1 | 17.6  | -     | 16.7 | 17.0 | 17.5  | -     | 16.3 | 16.5 | 17.0  | -                                    | 15.6 | 15.8 | 16.3  | -     | 14.6 | 14.9 | 15.4  | 0.0   | 13.8 | 14.0 | 14.5  | -     |      |
|     |         | S/T                         | 0.66 | 0.58 | 0.45  | -     | 0.66 | 0.59 | 0.45  | -     | 0.69 | 0.61 | 0.48  | -                                    | 1.00 | 0.63 | 0.50  | -     | 1.00 | 0.65 | 0.52  | 0.0   | 1.00 | 0.71 | 0.57  | -     |      |
|     |         | ΔT                          | 17   | 15   | 12    | -     | 17   | 15   | 12    | -     | 17   | 16   | 12    | -                                    | 17   | 15   | 12    | -     | 17   | 15   | 12    | 0     | 18   | 16   | 13    | -     |      |
| 630 | KW      | 0.89                        | 0.89 | 0.89 | -     | 0.99  | 0.99 | 0.98 | -     | 1.09  | 1.09 | 1.09 | -     | 1.20                                 | 1.20 | 1.20 | -     | 1.33  | 1.33 | 1.33 | 0.00  | 1.48  | 1.48 | 1.48 | -     |       |      |
|     | Amps    | 2.9                         | 2.9  | 2.9  | -     | 3.3   | 3.3  | 3.3  | -     | 3.8   | 3.8  | 3.8  | -     | 4.3                                  | 4.3  | 4.3  | -     | 4.8   | 4.8  | 4.8  | 0.0   | 5.5   | 5.5  | 5.5  | -     |       |      |
|     | Hi PR   | 223                         | 224  | 225  | -     | 258   | 259  | 260  | -     | 294   | 295  | 297  | -     | 334                                  | 334  | 336  | -     | 376   | 377  | 378  | 0.0   | 421   | 422  | 424  | -     |       |      |
|     | Lo PR   | 128                         | 129  | 133  | -     | 136   | 137  | 140  | -     | 142   | 144  | 147  | -     | 148                                  | 149  | 153  | -     | 153   | 155  | 158  | 0.0   | 160   | 162  | 165  | -     |       |      |
|     | MBh     | 17.1                        | 17.4 | 17.9 | -     | 17.0  | 17.2 | 17.7 | -     | 16.6  | 16.8 | 17.3 | -     | 15.8                                 | 16.0 | 16.5 | -     | 14.9  | 15.1 | 15.6 | 0.0   | 14.1  | 14.3 | 14.8 | -     |       |      |
| 75  | 500     | S/T                         | 0.69 | 0.61 | 0.48  | -     | 0.70 | 0.62 | 0.49  | -     | 1.00 | 0.64 | 0.51  | -                                    | 1.00 | 0.66 | 0.53  | -     | 1.00 | 0.69 | 0.55  | 0.0   | 1.00 | 1.00 | 0.60  | -     |      |
|     |         | ΔT                          | 16   | 15   | 11    | -     | 16   | 15   | 11    | -     | 16   | 15   | 12    | -                                    | 16   | 15   | 11    | -     | 16   | 14   | 11    | 0     | 17   | 15   | 12    | -     |      |
|     |         | KW                          | 0.90 | 0.90 | 0.89  | -     | 0.99 | 0.99 | 0.99  | -     | 1.09 | 1.09 | 1.09  | -                                    | 1.21 | 1.21 | 1.21  | -     | 1.33 | 1.33 | 1.33  | 0.0   | 1.48 | 1.48 | 1.48  | -     |      |
|     |         | Amps                        | 2.9  | 2.9  | 2.9   | -     | 3.3  | 3.3  | 3.3   | -     | 3.8  | 3.8  | 3.8   | -                                    | 4.3  | 4.3  | 4.3   | -     | 4.8  | 4.8  | 4.8   | 0.0   | 5.5  | 5.5  | 5.5   | -     |      |
|     |         | Hi PR                       | 224  | 225  | 227   | -     | 259  | 260  | 262   | -     | 296  | 297  | 298   | -                                    | 335  | 336  | 338   | -     | 378  | 379  | 380   | 0.0   | 423  | 424  | 425   | -     |      |
|     | 565     | Lo PR                       | 130  | 131  | 135   | -     | 137  | 139  | 142   | -     | 144  | 146  | 149   | -                                    | 150  | 151  | 155   | -     | 155  | 157  | 160   | 0.0   | 162  | 164  | 167   | -     |      |
|     |         | MBh                         | 16.7 | 16.9 | 17.4  | 18.2  | 16.6 | 16.8 | 17.3  | 18.0  | 16.1 | 16.4 | 16.9  | 17.6                                 | 16.3 | 16.6 | 17.1  | 17.8  | 15.6 | 15.6 | 16.1  | 16.9  | 14.5 | 14.7 | 15.2  | 15.9  |      |
|     |         | S/T                         | 0.73 | 0.66 | 0.52  | 0.4   | 1.00 | 0.66 | 0.53  | 0.4   | 1.00 | 0.69 | 0.55  | 0.4                                  | 1.00 | 0.74 | 0.61  | 0.5   | 1.00 | 0.71 | 0.57  | 0.4   | 1.00 | 0.73 | 0.59  | 0.5   |      |
|     |         | ΔT                          | 22   | 20   | 17    | 14    | 22   | 20   | 17    | 14    | 22   | 20   | 17    | 14                                   | 22   | 20   | 17    | 13    | 21   | 20   | 17    | 14    | 21   | 20   | 17    | 13    |      |
|     |         | KW                          | 0.89 | 0.89 | 0.89  | 0.9   | 0.98 | 0.98 | 0.98  | 1.0   | 1.09 | 1.09 | 1.08  | 1.1                                  | 1.20 | 1.20 | 1.20  | 1.21  | 1.20 | 1.20 | 1.20  | 1.21  | 1.32 | 1.32 | 1.32  | 1.33  |      |
| 630 | Amps    | 2.9                         | 2.9  | 2.9  | 2.9   | 3.3   | 3.3  | 3.3  | 3.3   | 3.8   | 3.8  | 3.7  | 3.8   | 4.2                                  | 4.2  | 4.2  | 4.3   | 4.2   | 4.2  | 4.2  | 4.3   | 4.8   | 4.8  | 4.8  | 4.8   |       |      |
|     | Hi PR   | 221                         | 222  | 224  | 227.6 | 256   | 257  | 259  | 262.5 | 293   | 294  | 295  | 299.0 | 332                                  | 333  | 335  | 338.4 | 332   | 333  | 335  | 338.4 | 374   | 375  | 377  | 380.8 |       |      |
|     | Lo PR   | 126                         | 128  | 131  | 136.3 | 134   | 135  | 139  | 144.0 | 141   | 142  | 145  | 150.7 | 146                                  | 148  | 151  | 156.4 | 146   | 148  | 151  | 156.4 | 152   | 153  | 157  | 161.9 |       |      |
|     | MBh     | 16.9                        | 17.1 | 17.6 | 18.4  | 16.8  | 17.0 | 17.5 | 18.3  | 16.3  | 16.6 | 17.1 | 17.8  | 15.6                                 | 15.8 | 16.3 | 17.1  | 15.6  | 15.8 | 16.3 | 17.1  | 14.7  | 14.9 | 15.4 | 16.2  |       |      |
|     | S/T     | 0.79                        | 0.71 | 0.58 | 0.4   | 1.00  | 0.72 | 0.58 | 0.4   | 1.00  | 0.74 | 0.61 | 0.5   | 1.00                                 | 0.76 | 0.63 | 0.5   | 1.00  | 0.76 | 0.63 | 0.5   | 1.00  | 1.00 | 0.65 | 0.5   |       |      |
| 75  | 500     | ΔT                          | 21   | 19   | 16    | 13    | 21   | 19   | 16    | 13    | 21   | 19   | 16    | 13                                   | 21   | 19   | 16    | 13    | 20   | 19   | 16    | 12    | 20   | 19   | 16    | 13    |      |
|     |         | KW                          | 0.89 | 0.89 | 0.89  | 0.90  | 0.99 | 0.99 | 0.98  | 0.99  | 1.09 | 1.09 | 1.09  | 1.10                                 | 1.20 | 1.20 | 1.20  | 1.21  | 1.20 | 1.20 | 1.21  | 1.33  | 1.33 | 1.33 | 1.33  | 1.48  |      |
|     |         | Amps                        | 2.9  | 2.9  | 2.9   | 2.9   | 3.3  | 3.3  | 3.3   | 3.3   | 3.8  | 3.8  | 3.8   | 3.8                                  | 4.3  | 4.3  | 4.3   | 4.3   | 4.2  | 4.2  | 4.2   | 4.3   | 4.8  | 4.8  | 4.8   | 4.8   |      |
|     |         | Hi PR                       | 223  | 224  | 226   | 229.4 | 258  | 259  | 260   | 264.2 | 294  | 295  | 297   | 300.8                                | 334  | 335  | 336   | 340.1 | 334  | 335  | 336   | 340.1 | 376  | 377  | 379   | 382.5 |      |
|     |         | Lo PR                       | 128  | 129  | 133   | 138.0 | 136  | 137  | 140   | 145.7 | 142  | 144  | 147   | 152.4                                | 148  | 150  | 153   | 158.1 | 148  | 150  | 153   | 158.1 | 154  | 155  | 158   | 163.7 |      |
|     | 565     | MBh                         | 17.1 | 17.4 | 17.9  | 18.6  | 17.0 | 17.2 | 17.7  | 18.5  | 16.6 | 16.8 | 17.3  | 18.1                                 | 15.8 | 16.0 | 16.5  | 17.3  | 15.8 | 16.0 | 16.5  | 17.3  | 14.9 | 15.1 | 15.6  | 16.4  |      |
|     |         | S/T                         | 0.82 | 0.74 | 0.61  | 0.5   | 1.00 | 0.75 | 0.61  | 0.5   | 1.00 | 0.77 | 0.64  | 0.5                                  | 1.00 | 0.79 | 0.66  | 0.5   | 1.00 | 0.79 | 0.66  | 0.5   | 1.00 | 1.00 | 0.68  | 0.5   |      |
|     |         | ΔT                          | 20   | 18   | 15    | 12    | 20   | 18   | 15    | 12    | 20   | 18   | 15    | 12                                   | 20   | 18   | 15    | 12    | 20   | 18   | 15    | 12    | 20   | 18   | 15    | 12    |      |
|     |         | KW                          | 0.90 | 0.90 | 0.89  | 0.9   | 0.99 | 0.99 | 0.99  | 1.0   | 1.09 | 1.09 | 1.09  | 1.1                                  | 1.21 | 1.21 | 1.20  | 1.2   | 1.21 | 1.21 | 1.20  | 1.2   | 1.33 | 1.33 | 1.33  | 1.33  | 1.48 |
|     |         | Amps                        | 2.9  | 2.9  | 2.9   | 3.0   | 3.3  | 3.3  | 3.3   | 3.4   | 3.8  | 3.8  | 3.8   | 3.8                                  | 4.3  | 4.3  | 4.3   | 4.3   | 4.2  | 4.2  | 4.2   | 4.3   | 4.8  | 4.8  | 4.8   | 4.8   |      |
| 630 | Hi PR   | 225                         | 226  | 227  | 231.0 | 260   | 261  | 262  | 265.9 | 296   | 297  | 299  | 302.4 | 335                                  | 336  | 338  | 341.8 | 335   | 336  | 338  | 341.8 | 378   | 379  | 380  | 384.2 |       |      |
|     | Lo PR   | 130                         | 131  | 135  | 139.9 | 137   | 139  | 142  | 147.6 | 144   | 146  | 149  | 154.3 | 150                                  | 151  | 155  | 160.0 | 150   | 151  | 155  | 160.0 | 155   | 157  | 160  | 165.5 |       |      |
|     | MBh     | 17.1                        | 17.4 | 17.9 | 18.6  | 17.0  | 17.2 | 17.7 | 18.5  | 16.6  | 16.8 | 17.3 | 18.1  | 15.8                                 | 16.0 | 16.5 | 17.3  | 15.8  | 16.0 | 16.5 | 17.3  | 14.9  | 15.1 | 15.6 | 16.4  |       |      |
|     | S/T     | 0.82                        | 0.74 | 0.61 | 0.5   | 1.00  | 0.75 | 0.61 | 0.5   | 1.00  | 0.77 | 0.64 | 0.5   | 1.00                                 | 0.79 | 0.66 | 0.5   | 1.00  | 0.79 | 0.66 | 0.5   | 1.00  | 1.00 | 0.73 | 0.6   |       |      |
|     | ΔT      | 20                          | 18   | 15   | 12    | 20    | 18   | 15   | 12    | 20    | 18   | 15   | 12    | 20                                   | 18   | 15   | 12    | 20    | 18   | 15   | 12    | 20    | 18   | 15   | 12    |       |      |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSXC702410A\* +CA\*TA2422\*4A\* +EEP LOW STAGE (CONT.)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |       |       |      |      |       |       |      |      |       |       | ENTERING INDOOR WET BULB TEMPERATURE |      |       |       |       |      |       |       |       |      |       |       |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|
|       |         | 65°F                        |      |       |       | 75°F |      |       |       | 85°F |      |       |       | 95°F                                 |      |       |       | 105°F |      |       |       | 115°F |      |       |       |
|       |         | 59                          | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59                                   | 63   | 67    | 71    | 59    | 63   | 67    | 71    | 59    | 63   | 67    | 71    |
| 80    | MBh     | 16.8                        | 17.0 | 17.5  | 18.3  | 16.6 | 16.9 | 17.4  | 18.1  | 16.2 | 16.4 | 16.9  | 17.7  | 15.5                                 | 15.7 | 16.2  | 17.0  | 14.5  | 14.8 | 15.3  | 16.0  | 13.7  | 13.9 | 14.4  | 15.2  |
|       | S/T     | 1.00                        | 0.78 | 0.65  | 0.5   | 1.00 | 0.79 | 0.65  | 0.5   | 1.00 | 0.81 | 0.68  | 0.5   | 1.00                                 | 1.00 | 0.70  | 0.6   | 1.00  | 1.00 | 0.72  | 0.6   | 1.00  | 1.00 | 0.77  | 0.6   |
|       | ΔT      | 25                          | 24   | 21    | 17    | 25   | 24   | 21    | 17    | 26   | 24   | 21    | 18    | 25                                   | 24   | 21    | 17    | 25    | 23   | 20    | 17    | 26    | 24   | 21    | 18    |
|       | kW      | 0.89                        | 0.89 | 0.89  | 0.9   | 0.98 | 0.98 | 0.98  | 1.0   | 1.09 | 1.09 | 1.08  | 1.1   | 1.20                                 | 1.20 | 1.20  | 1.2   | 1.33  | 1.32 | 1.32  | 1.3   | 1.47  | 1.47 | 1.47  | 1.5   |
|       | Amps    | 2.9                         | 2.9  | 2.9   | 2.9   | 3.3  | 3.3  | 3.3   | 3.3   | 3.8  | 3.8  | 3.7   | 3.8   | 4.2                                  | 4.2  | 4.2   | 4.3   | 4.8   | 4.8  | 4.8   | 4.8   | 5.4   | 5.4  | 5.4   | 5.5   |
|       | Hi PR   | 227                         | 223  | 224   | 228.1 | 257  | 258  | 259   | 262.9 | 293  | 294  | 296   | 299.4 | 332                                  | 333  | 335   | 338.8 | 375   | 376  | 377   | 381.2 | 420   | 421  | 423   | 426.4 |
|       | Lo PR   | 127                         | 128  | 132   | 136.9 | 134  | 136  | 139   | 144.5 | 141  | 143  | 146   | 151.3 | 147                                  | 148  | 152   | 156.9 | 152   | 154  | 157   | 162.5 | 159   | 161  | 164   | 169.5 |
|       | MBh     | 17.0                        | 17.2 | 17.7  | 18.5  | 16.8 | 17.1 | 17.6  | 18.3  | 16.4 | 16.6 | 17.1  | 17.9  | 15.7                                 | 15.9 | 16.4  | 17.2  | 14.7  | 15.0 | 15.5  | 16.2  | 13.9  | 14.1 | 14.6  | 15.4  |
|       | S/T     | 1.00                        | 0.83 | 0.70  | 0.6   | 1.00 | 0.84 | 0.71  | 0.6   | 1.00 | 0.86 | 0.73  | 0.6   | 1.00                                 | 1.00 | 0.75  | 0.6   | 1.00  | 1.00 | 0.77  | 0.6   | 1.00  | 1.00 | 0.82  | 0.7   |
|       | ΔT      | 24                          | 23   | 20    | 16    | 24   | 23   | 20    | 16    | 25   | 23   | 20    | 17    | 24                                   | 23   | 20    | 16    | 24    | 22   | 19    | 16    | 25    | 24   | 20    | 17    |
|       | kW      | 0.89                        | 0.89 | 0.89  | 0.90  | 0.99 | 0.99 | 0.98  | 0.99  | 1.09 | 1.09 | 1.09  | 1.1   | 1.20                                 | 1.20 | 1.20  | 1.2   | 1.33  | 1.33 | 1.33  | 1.33  | 1.48  | 1.48 | 1.48  | 1.48  |
|       | Amps    | 2.9                         | 2.9  | 2.9   | 2.9   | 3.3  | 3.3  | 3.3   | 3.3   | 3.8  | 3.8  | 3.8   | 3.8   | 4.3                                  | 4.3  | 4.3   | 4.3   | 4.8   | 4.8  | 4.8   | 4.8   | 5.5   | 5.5  | 5.5   | 5.5   |
| Hi PR | 223     | 224                         | 226  | 229.8 | 258   | 259  | 261  | 264.6 | 295   | 296  | 297  | 301.2 | 334   | 335                                  | 337  | 340.5 | 377   | 377   | 379  | 382.9 | 422   | 423   | 424  | 428.1 |       |
| Lo PR | 128     | 130                         | 133  | 138.6 | 136   | 138  | 141  | 146.3 | 143   | 144  | 148  | 153.0 | 149   | 150                                  | 153  | 158.6 | 154   | 156   | 159  | 164.2 | 161   | 163   | 166  | 171.2 |       |
| MBh   | 17.2    | 17.5                        | 18.0 | 18.7  | 17.1  | 17.3 | 17.8 | 18.6  | 16.6  | 16.9 | 17.4 | 18.1  | 15.9  | 16.1                                 | 16.6 | 17.4  | 15.0  | 15.2  | 15.7 | 16.5  | 14.1  | 14.4  | 14.9 | 15.6  |       |
| S/T   | 1.00    | 0.87                        | 0.73 | 0.6   | 1.00  | 0.87 | 0.74 | 0.6   | 1.00  | 1.00 | 0.76 | 0.6   | 1.00  | 1.00                                 | 0.78 | 0.6   | 1.00  | 1.00  | 0.80 | 0.7   | 1.00  | 1.00  | 1.00 | 0.7   |       |
| ΔT    | 24      | 22                          | 19   | 16    | 24    | 22   | 19   | 16    | 24    | 22   | 19   | 16    | 24    | 22                                   | 19   | 16    | 23    | 22    | 19   | 15    | 24    | 23    | 20   | 16    |       |
| kW    | 0.90    | 0.90                        | 0.89 | 0.9   | 0.99  | 0.99 | 0.99 | 1.0   | 1.09  | 1.09 | 1.09 | 1.1   | 1.21  | 1.21                                 | 1.21 | 1.2   | 1.33  | 1.33  | 1.33 | 1.3   | 1.48  | 1.48  | 1.48 | 1.5   |       |
| Amps  | 2.9     | 2.9                         | 2.9  | 3.0   | 3.3   | 3.3  | 3.3  | 3.4   | 3.8   | 3.8  | 3.8  | 3.8   | 4.3   | 4.3                                  | 4.3  | 4.3   | 4.8   | 4.8   | 4.8  | 4.9   | 5.5   | 5.5   | 5.5  | 5.5   |       |
| Hi PR | 225     | 226                         | 228  | 231.5 | 260   | 261  | 262  | 266.3 | 296   | 297  | 299  | 302.8 | 336   | 337                                  | 338  | 342.2 | 378   | 379   | 381  | 384.6 | 423   | 424   | 426  | 429.8 |       |
| Lo PR | 130     | 132                         | 135  | 140.5 | 138   | 140  | 143  | 148.1 | 145   | 146  | 149  | 154.8 | 150   | 152                                  | 155  | 160.5 | 156   | 158   | 161  | 166.1 | 163   | 164   | 168  | 173.1 |       |
| 85    | MBh     | 17.1                        | 17.3 | 17.8  | 18.6  | 16.9 | 17.2 | 17.7  | 18.4  | 16.5 | 16.7 | 17.2  | 18.0  | 15.7                                 | 16.0 | 16.5  | 17.2  | 14.8  | 15.1 | 15.6  | 16.3  | 14.0  | 14.2 | 14.7  | 15.5  |
|       | S/T     | 1.00                        | 0.88 | 0.75  | 0.6   | 1.00 | 1.00 | 0.75  | 0.6   | 1.00 | 1.00 | 0.78  | 0.6   | 1.00                                 | 1.00 | 0.80  | 0.7   | 1.00  | 1.00 | 1.00  | 0.7   | 1.00  | 1.00 | 1.00  | 0.7   |
|       | ΔT      | 29                          | 27   | 24    | 21    | 29   | 27   | 24    | 21    | 29   | 27   | 24    | 21    | 29                                   | 27   | 24    | 21    | 28    | 27   | 24    | 20    | 29    | 28   | 25    | 21    |
|       | kW      | 0.89                        | 0.89 | 0.89  | 0.9   | 0.98 | 0.98 | 0.98  | 1.0   | 1.09 | 1.09 | 1.09  | 1.1   | 1.20                                 | 1.20 | 1.20  | 1.2   | 1.33  | 1.33 | 1.33  | 1.3   | 1.48  | 1.47 | 1.47  | 1.5   |
|       | Amps    | 2.9                         | 2.9  | 2.9   | 2.9   | 3.3  | 3.3  | 3.3   | 3.3   | 3.8  | 3.8  | 3.8   | 3.8   | 4.3                                  | 4.3  | 4.2   | 4.3   | 4.8   | 4.8  | 4.8   | 4.8   | 5.4   | 5.4  | 5.4   | 5.5   |
|       | Hi PR   | 223                         | 224  | 225   | 229.1 | 258  | 259  | 260   | 264.0 | 294  | 295  | 297   | 300.5 | 333                                  | 334  | 336   | 339.8 | 376   | 377  | 378   | 382.2 | 421   | 422  | 424   | 427.5 |
|       | Lo PR   | 129                         | 130  | 133   | 138.8 | 136  | 138  | 141   | 146.4 | 143  | 145  | 148   | 153.1 | 149                                  | 150  | 153   | 158.8 | 154   | 156  | 159   | 164.4 | 161   | 163  | 166   | 171.4 |
|       | MBh     | 17.3                        | 17.5 | 18.0  | 18.8  | 17.1 | 17.4 | 17.9  | 18.6  | 16.7 | 16.9 | 17.4  | 18.2  | 15.9                                 | 16.2 | 16.7  | 17.4  | 15.0  | 15.3 | 15.8  | 16.5  | 14.2  | 14.4 | 14.9  | 15.7  |
|       | S/T     | 1.00                        | 0.93 | 0.80  | 0.7   | 1.00 | 1.00 | 0.81  | 0.7   | 1.00 | 1.00 | 0.83  | 0.7   | 1.00                                 | 1.00 | 0.85  | 0.7   | 1.00  | 1.00 | 1.00  | 0.7   | 1.00  | 1.00 | 1.00  | 0.8   |
|       | ΔT      | 28                          | 26   | 23    | 20    | 28   | 26   | 23    | 20    | 28   | 26   | 23    | 20    | 28                                   | 26   | 23    | 20    | 27    | 26   | 23    | 19    | 28    | 27   | 24    | 20    |
|       | kW      | 0.89                        | 0.89 | 0.89  | 0.90  | 0.99 | 0.99 | 0.99  | 0.99  | 1.09 | 1.09 | 1.09  | 1.1   | 1.21                                 | 1.20 | 1.20  | 1.2   | 1.33  | 1.33 | 1.33  | 1.34  | 1.48  | 1.48 | 1.48  | 1.48  |
|       | Amps    | 2.9                         | 2.9  | 2.9   | 2.9   | 3.3  | 3.3  | 3.3   | 3.4   | 3.8  | 3.8  | 3.8   | 3.8   | 4.3                                  | 4.3  | 4.3   | 4.3   | 4.8   | 4.8  | 4.8   | 4.8   | 5.5   | 5.5  | 5.5   | 5.5   |
| Hi PR | 224     | 225                         | 227  | 230.8 | 259   | 260  | 262  | 265.7 | 296   | 297  | 298  | 302.2 | 335   | 336                                  | 338  | 341.5 | 378   | 379   | 380  | 383.9 | 423   | 424   | 425  | 429.2 |       |
| Lo PR | 130     | 132                         | 135  | 140.5 | 138   | 140  | 143  | 148.1 | 145   | 146  | 149  | 154.9 | 150   | 152                                  | 155  | 160.5 | 156   | 158   | 161  | 166.1 | 163   | 165   | 168  | 173.1 |       |
| MBh   | 17.5    | 17.8                        | 18.2 | 19.0  | 17.4  | 17.6 | 18.1 | 18.9  | 16.9  | 17.2 | 17.7 | 18.4  | 16.2  | 16.4                                 | 16.9 | 17.7  | 15.3  | 15.5  | 16.0 | 16.8  | 14.4  | 14.7  | 15.2 | 15.9  |       |
| S/T   | 1.00    | 0.97                        | 0.83 | 0.7   | 1.00  | 1.00 | 0.84 | 0.7   | 1.00  | 1.00 | 0.86 | 0.7   | 1.00  | 1.00                                 | 0.88 | 0.7   | 1.00  | 1.00  | 1.00 | 0.8   | 1.00  | 1.00  | 1.00 | 0.8   |       |
| ΔT    | 27      | 25                          | 22   | 19    | 27    | 25   | 22   | 19    | 27    | 25   | 22   | 19    | 27    | 25                                   | 22   | 19    | 27    | 25    | 22   | 19    | 28    | 26    | 23   | 20    |       |
| kW    | 0.90    | 0.90                        | 0.90 | 0.9   | 0.99  | 0.99 | 0.99 | 1.0   | 1.10  | 1.10 | 1.09 | 1.1   | 1.21  | 1.21                                 | 1.21 | 1.2   | 1.34  | 1.33  | 1.33 | 1.33  | 1.48  | 1.48  | 1.48 | 1.5   |       |
| Amps  | 2.9     | 2.9                         | 2.9  | 3.0   | 3.3   | 3.3  | 3.3  | 3.4   | 3.8   | 3.8  | 3.8  | 3.8   | 4.3   | 4.3                                  | 4.3  | 4.3   | 4.8   | 4.8   | 4.8  | 4.9   | 5.5   | 5.5   | 5.5  | 5.5   |       |
| Hi PR | 226     | 227                         | 229  | 232.5 | 261   | 262  | 264  | 267.4 | 298   | 298  | 300  | 303.9 | 337   | 338                                  | 339  | 343.2 | 379   | 380   | 382  | 385.6 | 424   | 425   | 427  | 430.9 |       |
| Lo PR | 132     | 134                         | 137  | 142.4 | 140   | 141  | 145  | 150.0 | 147   | 148  | 151  | 156.7 | 152   | 154                                  | 157  | 162.4 | 158   | 159   | 163  | 168.0 | 165   | 166   | 170  | 175.0 |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |      |      |       |    |    |    |    |    |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|------|------|-------|----|----|----|----|----|
|       |         | 65°F                        |      |      |      |      |      | 75°F |      |      |      |      |      | 85°F |      |      |      |      |      | 95°F |      |      |      |      |      | 105°F |      |      |      |      |      | 115°F |    |    |    |    |    |
|       |         | 59                          | 63   | 67   | 71   | 71   | 71   | 59   | 63   | 67   | 71   | 71   | 71   | 59   | 63   | 67   | 71   | 71   | 71   | 59   | 63   | 67   | 71   | 71   | 71   | 59    | 63   | 67   | 71   | 71   | 71   | 59    | 63 | 67 | 71 | 71 | 71 |
| 70    | 1050    | MBh                         | 34.8 | 35.3 | 36.3 | 36.3 | -    | 34.5 | 35.0 | 36.0 | 36.0 | -    | 33.6 | 34.1 | 35.1 | -    | 32.0 | 32.5 | 33.5 | -    | 30.1 | 30.6 | 31.6 | -    | 28.4 | 28.8  | 29.9 | -    | 28.4 | 28.8 | 29.9 | -     |    |    |    |    |    |
|       |         | S/T                         | 0.61 | 0.53 | 0.39 | -    | -    | 0.61 | 0.54 | 0.40 | -    | -    | 0.64 | 0.56 | 0.43 | -    | 0.66 | 0.58 | 0.45 | -    | 1.00 | 0.60 | 0.47 | -    | 1.00 | 0.65  | 0.52 | -    | 1.00 | 0.65 | 0.52 | -     |    |    |    |    |    |
|       |         | ΔT                          | 20   | 18   | 15   | -    | -    | 20   | 18   | 15   | -    | -    | 20   | 18   | 15   | -    | 20   | 18   | 15   | -    | 21   | 18   | 14   | -    | 21   | 19    | 16   | -    | 21   | 19   | 16   | -     |    |    |    |    |    |
|       |         | KW                          | 2.07 | 2.06 | 2.06 | -    | -    | 2.29 | 2.29 | 2.29 | -    | -    | 2.55 | 2.54 | 2.54 | -    | 2.82 | 2.82 | 2.82 | -    | 3.13 | 3.13 | 3.12 | -    | 3.49 | 3.49  | 3.48 | -    | 3.49 | 3.49 | 3.48 | -     |    |    |    |    |    |
|       |         | Amps                        | 6.7  | 6.7  | 6.7  | -    | -    | 7.7  | 7.7  | 7.6  | -    | -    | 8.8  | 8.8  | 8.7  | -    | 10.0 | 10.0 | 9.9  | -    | 11.3 | 11.3 | 11.3 | -    | 12.9 | 12.9  | 12.8 | -    | 12.9 | 12.9 | 12.8 | -     |    |    |    |    |    |
|       | Hi PR   | 244                         | 245  | 247  | -    | -    | 283  | 284  | 286  | -    | -    | 323  | 324  | 326  | -    | 367  | 368  | 370  | -    | 414  | 415  | 416  | -    | 464  | 465  | 467   | -    | 464  | 465  | 467  | -    |       |    |    |    |    |    |
|       | Lo PR   | 122                         | 124  | 127  | -    | -    | 130  | 131  | 134  | -    | -    | 136  | 138  | 141  | -    | 142  | 143  | 146  | -    | 147  | 149  | 152  | -    | 154  | 155  | 159   | -    | 154  | 155  | 159  | -    |       |    |    |    |    |    |
|       | MBh     | 35.3                        | 35.7 | 36.8 | -    | -    | 34.9 | 35.4 | 36.5 | -    | -    | 34.0 | 34.5 | 35.6 | -    | 32.5 | 33.0 | 34.0 | -    | 30.6 | 31.0 | 32.1 | -    | 28.8 | 29.3 | 30.3  | -    | 28.8 | 29.3 | 30.3 | -    |       |    |    |    |    |    |
|       | S/T     | 0.67                        | 0.59 | 0.45 | -    | -    | 0.67 | 0.60 | 0.46 | -    | -    | 0.70 | 0.62 | 0.49 | -    | 1.00 | 0.64 | 0.51 | -    | 1.00 | 0.66 | 0.53 | -    | 1.00 | 0.71 | 0.58  | -    | 1.00 | 0.71 | 0.58 | -    |       |    |    |    |    |    |
|       | ΔT      | 19                          | 17   | 14   | -    | -    | 19   | 17   | 14   | -    | -    | 19   | 17   | 14   | -    | 19   | 17   | 14   | -    | 19   | 17   | 13   | -    | 20   | 18   | 14    | -    | 20   | 18   | 14   | -    |       |    |    |    |    |    |
| KW    | 2.08    | 2.08                        | 2.07 | -    | -    | 2.30 | 2.30 | 2.30 | -    | -    | 2.56 | 2.56 | 2.55 | -    | 2.83 | 2.83 | 2.83 | -    | 3.14 | 3.14 | 3.13 | -    | 3.50 | 3.50 | 3.49 | -     | 3.50 | 3.50 | 3.49 | -    |      |       |    |    |    |    |    |
| Amps  | 6.7     | 6.7                         | 6.7  | -    | -    | 7.7  | 7.7  | 7.7  | -    | -    | 8.8  | 8.8  | 8.8  | -    | 10.0 | 10.0 | 10.0 | -    | 11.4 | 11.3 | 11.3 | -    | 12.9 | 12.9 | 12.9 | -     | 12.9 | 12.9 | 12.9 | -    |      |       |    |    |    |    |    |
| Hi PR | 246     | 247                         | 249  | -    | -    | 285  | 286  | 288  | -    | -    | 325  | 326  | 328  | -    | 369  | 370  | 372  | -    | 416  | 417  | 419  | -    | 466  | 467  | 469  | -     | 466  | 467  | 469  | -    |      |       |    |    |    |    |    |
| Lo PR | 124     | 126                         | 129  | -    | -    | 132  | 133  | 136  | -    | -    | 138  | 140  | 143  | -    | 144  | 145  | 148  | -    | 149  | 151  | 154  | -    | 156  | 157  | 160  | -     | 156  | 157  | 160  | -    |      |       |    |    |    |    |    |
| MBh   | 35.8    | 36.3                        | 37.3 | -    | -    | 35.5 | 36.0 | 37.0 | -    | -    | 34.6 | 35.1 | 36.1 | -    | 33.0 | 33.5 | 34.5 | -    | 31.1 | 31.6 | 32.6 | -    | 29.4 | 29.9 | 30.9 | -     | 29.4 | 29.9 | 30.9 | -    |      |       |    |    |    |    |    |
| S/T   | 0.70    | 0.62                        | 0.49 | -    | -    | 0.71 | 0.63 | 0.49 | -    | -    | 0.73 | 0.66 | 0.52 | -    | 1.00 | 0.68 | 0.54 | -    | 1.00 | 0.70 | 0.56 | -    | 1.00 | 0.75 | 0.61 | -     | 1.00 | 0.75 | 0.61 | -    |      |       |    |    |    |    |    |
| ΔT    | 18      | 16                          | 13   | -    | -    | 18   | 16   | 13   | -    | -    | 18   | 16   | 13   | -    | 18   | 16   | 13   | -    | 18   | 16   | 12   | -    | 19   | 17   | 14   | -     | 19   | 17   | 14   | -    |      |       |    |    |    |    |    |
| KW    | 2.09    | 2.09                        | 2.08 | -    | -    | 2.31 | 2.31 | 2.31 | -    | -    | 2.57 | 2.57 | 2.56 | -    | 2.84 | 2.84 | 2.84 | -    | 3.15 | 3.15 | 3.14 | -    | 3.51 | 3.51 | 3.50 | -     | 3.51 | 3.51 | 3.50 | -    |      |       |    |    |    |    |    |
| Amps  | 6.8     | 6.8                         | 6.7  | -    | -    | 7.8  | 7.8  | 7.7  | -    | -    | 8.9  | 8.9  | 8.8  | -    | 10.1 | 10.1 | 10.0 | -    | 11.4 | 11.4 | 11.4 | -    | 13.0 | 13.0 | 12.9 | -     | 13.0 | 13.0 | 12.9 | -    |      |       |    |    |    |    |    |
| Hi PR | 248     | 249                         | 251  | -    | -    | 287  | 288  | 290  | -    | -    | 327  | 328  | 330  | -    | 371  | 372  | 374  | -    | 418  | 419  | 421  | -    | 468  | 469  | 471  | -     | 468  | 469  | 471  | -    |      |       |    |    |    |    |    |
| Lo PR | 126     | 128                         | 131  | -    | -    | 134  | 135  | 138  | -    | -    | 140  | 142  | 145  | -    | 146  | 147  | 150  | -    | 151  | 153  | 156  | -    | 158  | 159  | 162  | -     | 158  | 159  | 162  | -    |      |       |    |    |    |    |    |

|       |       |      |      |       |       |      |      |      |       |       |      |      |      |       |       |      |      |      |       |       |      |      |      |       |       |      |      |      |       |       |      |
|-------|-------|------|------|-------|-------|------|------|------|-------|-------|------|------|------|-------|-------|------|------|------|-------|-------|------|------|------|-------|-------|------|------|------|-------|-------|------|
| 75    | 1050  | MBh  | 34.8 | 35.3  | 36.3  | 37.9 | -    | 34.5 | 35.0  | 36.0  | 37.6 | -    | 33.6 | 34.1  | 35.1  | 36.7 | -    | 32.0 | 32.5  | 33.6  | 35.2 | -    | 30.1 | 30.6  | 31.7  | 33.2 | -    | 28.4 | 28.9  | 29.9  | 31.5 |
|       |       | S/T  | 0.74 | 0.66  | 0.52  | 0.4  | -    | 0.74 | 0.67  | 0.53  | 0.4  | -    | 1.00 | 0.69  | 0.56  | 0.4  | -    | 1.00 | 0.71  | 0.57  | 0.4  | -    | 1.00 | 0.73  | 0.60  | 0.5  | -    | 1.00 | 1.00  | 0.65  | 0.5  |
|       |       | ΔT   | 24   | 22    | 19    | 15   | -    | 24   | 22    | 19    | 15   | -    | 24   | 23    | 19    | 15   | -    | 24   | 22    | 19    | 15   | -    | 24   | 22    | 19    | 15   | -    | 25   | 23    | 20    | 16   |
|       |       | KW   | 2.06 | 2.06  | 2.06  | 2.1  | -    | 2.29 | 2.29  | 2.29  | 2.3  | -    | 2.55 | 2.54  | 2.54  | 2.6  | -    | 2.82 | 2.82  | 2.81  | 2.8  | -    | 3.13 | 3.13  | 3.12  | 3.1  | -    | 3.49 | 3.49  | 3.48  | 3.5  |
|       |       | Amps | 6.7  | 6.7   | 6.6   | 6.7  | -    | 7.7  | 7.7   | 7.6   | 7.7  | -    | 8.8  | 8.8   | 8.7   | 8.8  | -    | 10.0 | 10.0  | 9.9   | 10.0 | -    | 11.3 | 11.3  | 11.3  | 11.3 | -    | 12.9 | 12.9  | 12.8  | 12.9 |
|       | Hi PR | 245  | 246  | 247   | 251.6 | -    | 283  | 284  | 286   | 290.2 | -    | 324  | 325  | 326   | 330.6 | -    | 367  | 368  | 370   | 374.1 | -    | 414  | 415  | 417   | 420.9 | -    | 464  | 465  | 467   | 471.0 |      |
|       | Lo PR | 122  | 124  | 127   | 132.2 | -    | 130  | 131  | 134   | 139.6 | -    | 136  | 138  | 141   | 146.1 | -    | 142  | 143  | 146   | 151.7 | -    | 147  | 149  | 152   | 157.1 | -    | 154  | 156  | 159   | 163.8 |      |
|       | MBh   | 35.3 | 35.8 | 36.8  | 38.4  | -    | 35.0 | 35.5 | 36.5  | 38.1  | -    | 34.1 | 34.5 | 35.6  | 37.2  | -    | 32.5 | 33.0 | 34.0  | 35.6  | -    | 30.6 | 31.1 | 32.1  | 33.7  | -    | 28.8 | 29.3 | 30.4  | 32.0  |      |
|       | S/T   | 0.80 | 0.72 | 0.58  | 0.4   | -    | 0.80 | 0.73 | 0.59  | 0.4   | -    | 1.00 | 0.75 | 0.62  | 0.5   | -    | 1.00 | 0.77 | 0.63  | 0.5   | -    | 1.00 | 0.79 | 0.66  | 0.5   | -    | 1.00 | 1.00 | 0.71  | 0.6   |      |
|       | ΔT    | 23   | 21   | 18    | 14    | -    | 23   | 21   | 18    | 14    | -    | 23   | 21   | 18    | 14    | -    | 23   | 21   | 18    | 14    | -    | 23   | 21   | 17    | 14    | -    | 24   | 22   | 19    | 15    |      |
| KW    | 2.08  | 2.07 | 2.07 | 2.09  | -     | 2.30 | 2.30 | 2.30 | 2.31  | -     | 2.56 | 2.56 | 2.55 | 2.57  | -     | 2.83 | 2.83 | 2.83 | 2.84  | -     | 3.14 | 3.14 | 3.13 | 3.15  | -     | 3.50 | 3.50 | 3.49 | 3.51  |       |      |
| Amps  | 6.7   | 6.7  | 6.7  | 6.8   | -     | 7.7  | 7.7  | 7.7  | 7.8   | -     | 8.8  | 8.8  | 8.8  | 8.9   | -     | 10.0 | 10.0 | 10.0 | 10.1  | -     | 11.3 | 11.3 | 11.3 | 11.4  | -     | 12.9 | 12.9 | 12.9 | 13.0  |       |      |
| Hi PR | 247   | 248  | 249  | 253.7 | -     | 285  | 286  | 288  | 292.2 | -     | 326  | 327  | 328  | 332.6 | -     | 369  | 370  | 372  | 376.1 | -     | 416  | 417  | 419  | 423.0 | -     | 466  | 467  | 469  | 473.1 |       |      |
| Lo PR | 124   | 126  | 129  | 134.0 | -     | 132  | 133  | 136  | 141.4 | -     | 138  | 140  | 143  | 147.9 | -     | 144  | 145  | 148  | 153.5 | -     | 149  | 151  | 154  | 158.9 | -     | 156  | 157  | 160  | 165.6 |       |      |
| MBh   | 35.8  | 36.3 | 37.4 | 38.9  | -     | 35.5 | 36.0 | 37.0 | 38.6  | -     | 34.6 | 35.1 | 36.1 | 37.7  | -     | 33.0 | 33.5 | 34.6 | 36.2  | -     | 31.1 | 31.6 | 32.7 | 34.2  | -     | 29.4 | 29.9 | 30.9 | 32.5  |       |      |
| S/T   | 0.83  | 0.75 | 0.62 | 0.5   | -     | 1.00 | 0.76 | 0.62 | 0.5   | -     | 1.00 | 0.78 | 0.65 | 0.5   | -     | 1.00 | 0.80 | 0.67 | 0.5   | -     | 1.00 | 0.83 | 0.69 | 0.5   | -     | 1.00 | 1.00 | 0.74 | 0.6   |       |      |
| ΔT    | 22    | 20   | 17   | 13    | -     | 22   | 20   | 17   | 13    | -     | 22   | 20   | 17   | 13    | -     | 22   | 20   | 17   | 13    | -     | 22   | 20   | 16   | 13    | -     | 23   | 21   | 18   | 14    |       |      |
| KW    | 2.09  | 2.08 | 2.08 | 2.1   | -     | 2.31 | 2.31 | 2.31 | 2.3   | -     | 2.57 | 2.57 | 2.56 | 2.6   | -     | 2.84 | 2.84 | 2.84 | 2.9   | -     | 3.15 | 3.15 | 3.14 | 3.2   | -     | 3.51 | 3.51 | 3.50 | 3.5   |       |      |
| Amps  | 6.8   | 6.8  | 6.7  | 6.8   | -     | 7.8  | 7.7  | 7.7  | 7.8   | -     | 8.9  | 8.8  | 8.8  | 8.9   | -     | 10.1 | 10.0 | 10.0 | 10.1  | -     | 11.4 | 11.4 | 11.4 | 11.4  | -     | 13.0 | 12.9 | 12.9 | 13.0  |       |      |
| Hi PR | 249   | 250  | 251  | 255.7 | -     | 287  | 288  | 290  | 294.3 | -     | 328  | 329  | 330  | 334.6 | -     | 371  | 372  | 374  | 378.1 | -     | 418  | 419  | 421  | 425.0 | -     | 468  | 469  | 471  | 475.1 |       |      |
| Lo PR | 126   | 128  | 131  | 136.0 | -     | 134  | 135  | 138  | 143.4 | -     | 140  | 142  | 145  | 149.9 | -     | 146  | 147  | 150  | 155.4 | -     | 151  | 153  | 156  | 160.9 | -     | 158  | 159  | 162  | 167.6 |       |      |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



| IDB       | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |       |       |      |      |       |       |      |      |       |       | ENTERING INDOOR WET BULB TEMPERATURE |      |       |       |       |      |       |       |       |      |       |       |
|-----------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|
|           |         | 65°F                        |      |       |       | 75°F |      |       |       | 85°F |      |       |       | 95°F                                 |      |       |       | 105°F |      |       |       | 115°F |      |       |       |
|           |         | 59                          | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59                                   | 63   | 67    | 71    | 59    | 63   | 67    | 71    | 59    | 63   | 67    | 71    |
| <b>80</b> | MBh     | 35.0                        | 35.5 | 36.5  | 38.1  | 34.7 | 35.2 | 36.2  | 37.8  | 33.8 | 34.3 | 35.3  | 36.9  | 32.2                                 | 32.7 | 33.7  | 35.3  | 30.3  | 30.8 | 31.8  | 33.4  | 28.6  | 29.0 | 30.1  | 31.7  |
|           | S/T     | 1.00                        | 0.79 | 0.65  | 0.5   | 1.00 | 0.79 | 0.66  | 0.5   | 1.00 | 0.82 | 0.68  | 0.5   | 1.00                                 | 0.84 | 0.70  | 0.6   | 1.00  | 1.00 | 0.72  | 0.6   | 1.00  | 1.00 | 0.77  | 0.6   |
|           | ΔT      | 28                          | 26   | 23    | 19    | 28   | 26   | 23    | 20    | 28   | 27   | 23    | 20    | 28                                   | 26   | 23    | 19    | 28    | 26   | 23    | 19    | 29    | 27   | 24    | 20    |
|           | KW      | 2.07                        | 2.06 | 2.06  | 2.1   | 2.29 | 2.29 | 2.29  | 2.3   | 2.55 | 2.54 | 2.54  | 2.6   | 2.82                                 | 2.82 | 2.82  | 2.8   | 3.13  | 3.13 | 3.12  | 3.1   | 3.49  | 3.49 | 3.48  | 3.5   |
|           | Amps    | 6.7                         | 6.7  | 6.7   | 6.7   | 7.7  | 7.7  | 7.6   | 7.7   | 8.8  | 8.8  | 8.7   | 8.8   | 10.0                                 | 10.0 | 9.9   | 10.0  | 11.3  | 11.3 | 11.3  | 11.3  | 12.9  | 12.9 | 12.8  | 12.9  |
|           | Hi PR   | 245                         | 246  | 248   | 252.1 | 284  | 285  | 286   | 290.6 | 324  | 325  | 327   | 331.0 | 367                                  | 369  | 370   | 374.5 | 414   | 415  | 417   | 421.4 | 464   | 465  | 467   | 471.4 |
|           | Lo PR   | 123                         | 124  | 128   | 132.7 | 130  | 132  | 135   | 140.2 | 137  | 138  | 141   | 146.7 | 142                                  | 144  | 147   | 152.2 | 148   | 149  | 152   | 157.6 | 155   | 156  | 159   | 164.4 |
|           | MBh     | 35.5                        | 35.9 | 37.0  | 38.6  | 35.1 | 35.6 | 36.7  | 38.3  | 34.2 | 34.7 | 35.8  | 37.4  | 32.7                                 | 33.2 | 34.2  | 35.8  | 30.8  | 31.2 | 32.3  | 33.9  | 29.0  | 29.5 | 30.5  | 32.1  |
|           | S/T     | 1.00                        | 0.85 | 0.71  | 0.6   | 1.00 | 0.85 | 0.72  | 0.6   | 1.00 | 0.88 | 0.74  | 0.6   | 1.00                                 | 1.00 | 0.76  | 0.6   | 1.00  | 1.00 | 0.78  | 0.6   | 1.00  | 1.00 | 0.83  | 0.7   |
|           | ΔT      | 27                          | 25   | 22    | 18    | 27   | 25   | 22    | 18    | 27   | 26   | 22    | 18    | 27                                   | 25   | 22    | 18    | 27    | 25   | 22    | 18    | 28    | 26   | 23    | 19    |
|           | KW      | 2.08                        | 2.08 | 2.07  | 2.09  | 2.30 | 2.30 | 2.30  | 2.32  | 2.56 | 2.56 | 2.55  | 2.57  | 2.83                                 | 2.83 | 2.83  | 2.84  | 3.14  | 3.14 | 3.13  | 3.15  | 3.50  | 3.50 | 3.49  | 3.51  |
|           | Amps    | 6.7                         | 6.7  | 6.7   | 6.8   | 7.7  | 7.7  | 7.7   | 7.8   | 8.8  | 8.8  | 8.8   | 8.9   | 10.0                                 | 10.0 | 10.0  | 10.1  | 11.3  | 11.3 | 11.3  | 11.4  | 12.9  | 12.9 | 12.9  | 13.0  |
| Hi PR     | 247     | 248                         | 250  | 254.1 | 286   | 287  | 288  | 292.7 | 326   | 327  | 329  | 333.1 | 370   | 371                                  | 372  | 376.6 | 416   | 417   | 419  | 423.5 | 466   | 468   | 469  | 473.5 |       |
| Lo PR     | 125     | 126                         | 129  | 134.5 | 132   | 134  | 137  | 142.0 | 139   | 140  | 143  | 148.5 | 144   | 146                                  | 149  | 154.0 | 150   | 151   | 154  | 159.4 | 156   | 158   | 161  | 166.2 |       |
| MBh       | 36.0    | 36.5                        | 37.5 | 39.1  | 35.7  | 36.2 | 37.2 | 38.8  | 34.8  | 35.3 | 36.3 | 37.9  | 33.2  | 33.7                                 | 34.7 | 36.3  | 31.3  | 31.8  | 32.8 | 34.4  | 29.6  | 30.1  | 31.1 | 32.7  |       |
| S/T       | 1.00    | 0.88                        | 0.74 | 0.6   | 1.00  | 0.89 | 0.75 | 0.6   | 1.00  | 0.91 | 0.77 | 0.6   | 1.00  | 1.00                                 | 0.79 | 0.7   | 1.00  | 1.00  | 0.82 | 0.7   | 1.00  | 1.00  | 0.87 | 0.7   |       |
| ΔT        | 26      | 24                          | 21   | 17    | 26    | 24   | 21   | 17    | 26    | 25   | 21   | 18    | 26    | 24                                   | 21   | 17    | 26    | 24    | 21   | 17    | 27    | 25    | 22   | 18    |       |
| KW        | 2.09    | 2.08                        | 2.08 | 2.1   | 2.31  | 2.31 | 2.31 | 2.3   | 2.57  | 2.57 | 2.56 | 2.6   | 2.84  | 2.84                                 | 2.84 | 2.9   | 3.15  | 3.15  | 3.14 | 3.2   | 3.51  | 3.51  | 3.50 | 3.5   |       |
| Amps      | 6.8     | 6.8                         | 6.7  | 6.8   | 7.8   | 7.8  | 7.7  | 7.8   | 8.9   | 8.9  | 8.8  | 8.9   | 10.1  | 10.0                                 | 10.0 | 10.1  | 11.4  | 11.4  | 11.4 | 11.4  | 13.0  | 13.0  | 12.9 | 13.0  |       |
| Hi PR     | 249     | 250                         | 252  | 256.1 | 288   | 289  | 290  | 294.7 | 328   | 329  | 331  | 335.1 | 372   | 373                                  | 374  | 378.6 | 418   | 420   | 421  | 425.5 | 468   | 470   | 471  | 475.5 |       |
| Lo PR     | 127     | 128                         | 131  | 136.5 | 134   | 136  | 139  | 144.0 | 141   | 142  | 145  | 150.5 | 146   | 148                                  | 151  | 156.0 | 152   | 153   | 156  | 161.4 | 158   | 160   | 163  | 168.2 |       |
| <b>85</b> | MBh     | 35.6                        | 36.1 | 37.1  | 38.7  | 35.3 | 35.8 | 36.8  | 38.4  | 34.4 | 34.9 | 35.9  | 37.5  | 32.8                                 | 33.3 | 34.3  | 35.9  | 30.9  | 31.4 | 32.4  | 34.0  | 29.1  | 29.6 | 30.7  | 32.3  |
|           | S/T     | 1.00                        | 0.89 | 0.75  | 0.6   | 1.00 | 0.89 | 0.76  | 0.6   | 1.00 | 1.00 | 0.78  | 0.6   | 1.00                                 | 1.00 | 0.80  | 0.7   | 1.00  | 1.00 | 0.82  | 0.7   | 1.00  | 1.00 | 1.00  | 0.7   |
|           | ΔT      | 32                          | 30   | 27    | 23    | 32   | 30   | 27    | 23    | 32   | 30   | 27    | 23    | 32                                   | 30   | 27    | 23    | 32    | 30   | 26    | 23    | 33    | 31   | 27    | 24    |
|           | KW      | 2.07                        | 2.07 | 2.06  | 2.1   | 2.30 | 2.30 | 2.29  | 2.3   | 2.55 | 2.55 | 2.55  | 2.6   | 2.83                                 | 2.82 | 2.82  | 2.8   | 3.13  | 3.13 | 3.13  | 3.1   | 3.49  | 3.49 | 3.49  | 3.5   |
|           | Amps    | 6.7                         | 6.7  | 6.7   | 6.7   | 7.7  | 7.7  | 7.7   | 7.7   | 8.8  | 8.8  | 8.8   | 8.8   | 10.0                                 | 10.0 | 10.0  | 10.0  | 11.3  | 11.3 | 11.3  | 11.4  | 12.9  | 12.9 | 12.9  | 12.9  |
|           | Hi PR   | 246                         | 247  | 249   | 253.2 | 285  | 286  | 288   | 291.8 | 325  | 326  | 328   | 332.2 | 369                                  | 370  | 371   | 375.7 | 416   | 417  | 418   | 422.5 | 466   | 467  | 468   | 472.6 |
|           | Lo PR   | 125                         | 126  | 129   | 134.6 | 132  | 134  | 137   | 142.0 | 139  | 140  | 143   | 148.5 | 144                                  | 146  | 149   | 154.0 | 150   | 151  | 154   | 159.4 | 156   | 158  | 161   | 166.2 |
|           | MBh     | 36.0                        | 36.5 | 37.6  | 39.2  | 35.7 | 36.2 | 37.3  | 38.8  | 34.8 | 35.3 | 36.3  | 37.9  | 33.3                                 | 33.7 | 34.8  | 36.4  | 31.3  | 31.8 | 32.9  | 34.5  | 29.6  | 30.1 | 31.1  | 32.7  |
|           | S/T     | 1.00                        | 0.95 | 0.81  | 0.7   | 1.00 | 0.95 | 0.82  | 0.7   | 1.00 | 1.00 | 0.84  | 0.7   | 1.00                                 | 1.00 | 0.86  | 0.7   | 1.00  | 1.00 | 0.88  | 0.7   | 1.00  | 1.00 | 1.00  | 0.8   |
|           | ΔT      | 31                          | 29   | 25    | 22    | 31   | 29   | 25    | 22    | 31   | 29   | 26    | 22    | 31                                   | 29   | 25    | 22    | 30    | 29   | 25    | 22    | 32    | 30   | 26    | 23    |
|           | KW      | 2.08                        | 2.08 | 2.08  | 2.09  | 2.31 | 2.31 | 2.30  | 2.32  | 2.56 | 2.56 | 2.56  | 2.57  | 2.84                                 | 2.84 | 2.83  | 2.85  | 3.14  | 3.14 | 3.14  | 3.16  | 3.50  | 3.50 | 3.50  | 3.52  |
|           | Amps    | 6.7                         | 6.7  | 6.7   | 6.8   | 7.7  | 7.7  | 7.7   | 7.8   | 8.8  | 8.8  | 8.8   | 8.9   | 10.0                                 | 10.0 | 10.0  | 10.1  | 11.4  | 11.4 | 11.3  | 11.4  | 12.9  | 12.9 | 12.9  | 13.0  |
| Hi PR     | 248     | 249                         | 251  | 255.3 | 287   | 288  | 290  | 293.8 | 327   | 328  | 330  | 334.2 | 371   | 372                                  | 373  | 377.7 | 418   | 419   | 420  | 424.6 | 468   | 469   | 470  | 474.7 |       |
| Lo PR     | 127     | 128                         | 131  | 136.4 | 134   | 135  | 139  | 143.8 | 140   | 142  | 145  | 150.3 | 146   | 148                                  | 151  | 155.8 | 151   | 153   | 156  | 161.2 | 158   | 160   | 163  | 168.0 |       |
| MBh       | 36.6    | 37.1                        | 38.1 | 39.7  | 36.3  | 36.8 | 37.8 | 39.4  | 35.4  | 35.9 | 36.9 | 38.5  | 33.8  | 34.3                                 | 35.3 | 36.9  | 31.9  | 32.4  | 33.4 | 35.0  | 30.1  | 30.6  | 31.7 | 33.3  |       |
| S/T       | 1.00    | 0.98                        | 0.84 | 0.7   | 1.00  | 1.00 | 0.85 | 0.7   | 1.00  | 1.00 | 0.88 | 0.7   | 1.00  | 1.00                                 | 0.90 | 0.8   | 1.00  | 1.00  | 0.92 | 0.8   | 1.00  | 1.00  | 1.00 | 0.8   |       |
| ΔT        | 30      | 28                          | 25   | 21    | 30    | 28   | 24   | 21    | 30    | 28   | 25   | 21    | 30    | 28                                   | 24   | 21    | 30    | 28    | 24   | 21    | 31    | 29    | 25   | 22    |       |
| KW        | 2.09    | 2.09                        | 2.09 | 2.1   | 2.32  | 2.32 | 2.31 | 2.3   | 2.57  | 2.57 | 2.57 | 2.6   | 2.85  | 2.85                                 | 2.84 | 2.9   | 3.15  | 3.15  | 3.15 | 3.2   | 3.51  | 3.51  | 3.51 | 3.5   |       |
| Amps      | 6.8     | 6.8                         | 6.8  | 6.8   | 7.8   | 7.8  | 7.8  | 7.8   | 8.9   | 8.9  | 8.9  | 8.9   | 10.1  | 10.1                                 | 10.1 | 10.1  | 11.4  | 11.4  | 11.4 | 11.5  | 13.0  | 13.0  | 13.0 | 13.0  |       |
| Hi PR     | 250     | 251                         | 253  | 257.3 | 289   | 290  | 292  | 295.9 | 329   | 330  | 332  | 336.2 | 373   | 374                                  | 375  | 379.7 | 420   | 421   | 422  | 426.6 | 470   | 471   | 472  | 476.7 |       |
| Lo PR     | 129     | 130                         | 133  | 138.4 | 136   | 137  | 141  | 145.8 | 142   | 144  | 147  | 152.3 | 148   | 150                                  | 153  | 157.8 | 153   | 155   | 158  | 163.2 | 160   | 162   | 165  | 170.0 |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |      |      |      |   |
|-------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|---|
|       |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F |      |      |      | 105°F |      |      |      | 115°F |      |      |      |   |
|       |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |   |
| 70    | 680     | MBh                         | 25.0 | 25.4 | 26.1 | -    | 24.8 | 25.1 | 25.9 | -    | 24.1 | 24.5 | 25.2 | -    | 23.0 | 23.4 | 24.1 | -     | 21.6 | 22.0 | 22.7 | 0.0   | 20.4 | 20.7 | 21.5 | - |
|       |         | S/T                         | 0.62 | 0.54 | 0.40 | -    | 0.63 | 0.55 | 0.41 | -    | 0.65 | 0.57 | 0.44 | -    | 1.00 | 0.59 | 0.46 | -     | 1.00 | 0.62 | 0.48 | 0.0   | 1.00 | 0.67 | 0.53 | - |
|       |         | ΔT                          | 19   | 18   | 14   | -    | 19   | 18   | 14   | -    | 20   | 18   | 14   | -    | 19   | 18   | 14   | -     | 19   | 17   | 14   | 0     | 20   | 18   | 15   | - |
|       |         | KW                          | 1.30 | 1.30 | 1.30 | -    | 1.44 | 1.44 | 1.44 | -    | 1.60 | 1.60 | 1.60 | -    | 1.77 | 1.77 | 1.77 | -     | 1.97 | 1.97 | 1.96 | 0.0   | 2.19 | 2.19 | 2.19 | - |
|       |         | Amps                        | 4.2  | 4.2  | 4.2  | -    | 4.8  | 4.8  | 4.8  | -    | 5.5  | 5.5  | 5.5  | -    | 6.3  | 6.3  | 6.3  | -     | 7.1  | 7.1  | 7.1  | 0.0   | 8.1  | 8.1  | 8.1  | - |
|       |         | Hi PR                       | 234  | 235  | 236  | -    | 270  | 271  | 273  | -    | 309  | 310  | 312  | -    | 351  | 352  | 353  | -     | 395  | 396  | 398  | 0.0   | 443  | 444  | 446  | - |
| Lo PR | 126     | 127                         | 130  | -    | 133  | 135  | 138  | -    | 140  | 142  | 145  | -    | 146  | 147  | 150  | -    | 151  | 153   | 156  | 0.0  | 158  | 160   | 163  | -    |      |   |
| 70    | 780     | MBh                         | 25.3 | 25.7 | 26.4 | -    | 25.1 | 25.5 | 26.2 | -    | 24.5 | 24.8 | 25.6 | -    | 23.3 | 23.7 | 24.4 | -     | 22.0 | 22.3 | 23.1 | 0.0   | 20.7 | 21.1 | 21.8 | - |
|       |         | S/T                         | 0.68 | 0.61 | 0.47 | -    | 0.69 | 0.61 | 0.47 | -    | 0.72 | 0.64 | 0.50 | -    | 1.00 | 0.66 | 0.52 | -     | 1.00 | 0.68 | 0.54 | 0.0   | 1.00 | 0.73 | 0.59 | - |
|       |         | ΔT                          | 18   | 17   | 13   | -    | 18   | 16   | 13   | -    | 19   | 17   | 13   | -    | 18   | 16   | 13   | -     | 18   | 16   | 13   | 0     | 19   | 17   | 14   | - |
|       |         | KW                          | 1.31 | 1.31 | 1.30 | -    | 1.45 | 1.45 | 1.45 | -    | 1.61 | 1.61 | 1.61 | -    | 1.78 | 1.78 | 1.78 | -     | 1.98 | 1.97 | 1.97 | 0.00  | 2.20 | 2.20 | 2.20 | - |
|       |         | Amps                        | 4.2  | 4.2  | 4.2  | -    | 4.9  | 4.8  | 4.8  | -    | 5.5  | 5.5  | 5.5  | -    | 6.3  | 6.3  | 6.3  | -     | 7.1  | 7.1  | 7.1  | 0.0   | 8.1  | 8.1  | 8.1  | - |
|       |         | Hi PR                       | 236  | 237  | 238  | -    | 272  | 273  | 275  | -    | 311  | 312  | 314  | -    | 353  | 354  | 355  | -     | 397  | 398  | 400  | 0.0   | 445  | 446  | 448  | - |
| Lo PR | 128     | 129                         | 132  | -    | 135  | 137  | 140  | -    | 142  | 144  | 147  | -    | 148  | 149  | 152  | -    | 153  | 155   | 158  | 0.0  | 160  | 162   | 165  | -    |      |   |
| 910   | 910     | MBh                         | 25.9 | 26.2 | 27.0 | -    | 25.7 | 26.0 | 26.8 | -    | 25.0 | 25.4 | 26.1 | -    | 23.9 | 24.2 | 25.0 | -     | 22.5 | 22.9 | 23.6 | 0.0   | 21.3 | 21.6 | 22.4 | - |
|       |         | S/T                         | 0.73 | 0.65 | 0.51 | -    | 0.73 | 0.65 | 0.51 | -    | 1.00 | 0.68 | 0.54 | -    | 1.00 | 0.70 | 0.56 | -     | 1.00 | 0.72 | 0.58 | 0.0   | 1.00 | 1.00 | 0.64 | - |
|       |         | ΔT                          | 17   | 15   | 12   | -    | 17   | 15   | 12   | -    | 17   | 16   | 12   | -    | 17   | 15   | 12   | -     | 17   | 15   | 12   | 0     | 18   | 16   | 13   | - |
|       |         | KW                          | 1.31 | 1.31 | 1.31 | -    | 1.46 | 1.46 | 1.45 | -    | 1.62 | 1.62 | 1.61 | -    | 1.79 | 1.79 | 1.79 | -     | 1.98 | 1.98 | 1.98 | 0.0   | 2.21 | 2.21 | 2.21 | - |
|       |         | Amps                        | 4.3  | 4.3  | 4.3  | -    | 4.9  | 4.9  | 4.9  | -    | 5.6  | 5.6  | 5.6  | -    | 6.3  | 6.3  | 6.3  | -     | 7.2  | 7.2  | 7.2  | 0.0   | 8.2  | 8.2  | 8.1  | - |
|       |         | Hi PR                       | 238  | 239  | 241  | -    | 275  | 276  | 278  | -    | 314  | 315  | 316  | -    | 355  | 356  | 358  | -     | 400  | 401  | 403  | 0.0   | 448  | 449  | 451  | - |
| Lo PR | 130     | 132                         | 135  | -    | 138  | 140  | 143  | -    | 145  | 146  | 149  | -    | 150  | 152  | 155  | -    | 156  | 158   | 161  | 0.0  | 163  | 164   | 168  | -    |      |   |

|       |     |       |      |       |      |       |      |       |      |       |      |       |      |       |      |       |      |       |      |       |      |       |      |       |      |       |
|-------|-----|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|
| 75    | 680 | MBh   | 25.0 | 25.4  | 26.1 | 27.3  | 24.8 | 25.2  | 25.9 | 27.0  | 24.1 | 24.5  | 25.2 | 26.4  | 23.0 | 23.4  | 24.1 | 25.3  | 21.6 | 22.0  | 22.8 | 23.9  | 20.4 | 20.7  | 21.5 | 22.6  |
|       |     | S/T   | 0.75 | 0.68  | 0.54 | 0.4   | 1.00 | 0.68  | 0.54 | 0.4   | 1.00 | 0.71  | 0.57 | 0.4   | 1.00 | 0.73  | 0.59 | 0.4   | 1.00 | 0.75  | 0.61 | 0.5   | 1.00 | 1.00  | 0.66 | 0.5   |
|       |     | ΔT    | 23   | 22    | 18   | 15    | 23   | 22    | 18   | 15    | 24   | 22    | 18   | 15    | 23   | 21    | 18   | 15    | 23   | 21    | 18   | 14    | 24   | 22    | 19   | 16    |
|       |     | KW    | 1.30 | 1.30  | 1.29 | 1.3   | 1.44 | 1.44  | 1.44 | 1.4   | 1.60 | 1.60  | 1.60 | 1.6   | 1.77 | 1.77  | 1.77 | 1.8   | 1.97 | 1.97  | 1.96 | 2.0   | 2.19 | 2.19  | 2.19 | 2.2   |
|       |     | Amps  | 4.2  | 4.2   | 4.2  | 4.2   | 4.8  | 4.8   | 4.8  | 4.8   | 5.5  | 5.5   | 5.5  | 5.5   | 6.3  | 6.3   | 6.2  | 6.3   | 7.1  | 7.1   | 7.1  | 7.1   | 8.1  | 8.1   | 8.1  | 8.1   |
|       |     | Hi PR | 234  | 235   | 236  | 240.5 | 271  | 272   | 273  | 277.3 | 309  | 310   | 312  | 316.0 | 351  | 352   | 353  | 357.5 | 396  | 397   | 398  | 402.4 | 443  | 445   | 446  | 450.2 |
| Lo PR | 126 | 127   | 130  | 135.8 | 133  | 135   | 138  | 143.5 | 140  | 142   | 145  | 150.2 | 146  | 147   | 151  | 155.9 | 151  | 153   | 156  | 161.4 | 158  | 160   | 163  | 168.4 |      |       |
| 75    | 780 | MBh   | 25.4 | 25.7  | 26.5 | 27.6  | 25.1 | 25.5  | 26.2 | 27.4  | 24.5 | 24.8  | 25.6 | 26.7  | 23.4 | 23.7  | 24.5 | 25.6  | 22.0 | 22.3  | 23.1 | 24.2  | 20.7 | 21.1  | 21.8 | 23.0  |
|       |     | S/T   | 0.82 | 0.74  | 0.60 | 0.5   | 1.00 | 0.75  | 0.61 | 0.5   | 1.00 | 0.77  | 0.63 | 0.5   | 1.00 | 0.79  | 0.65 | 0.5   | 1.00 | 1.00  | 0.67 | 0.5   | 1.00 | 1.00  | 0.73 | 0.6   |
|       |     | ΔT    | 22   | 20    | 17   | 14    | 22   | 20    | 17   | 14    | 22   | 21    | 17   | 14    | 22   | 20    | 17   | 14    | 22   | 20    | 17   | 13    | 23   | 21    | 18   | 14    |
|       |     | KW    | 1.31 | 1.30  | 1.30 | 1.31  | 1.45 | 1.45  | 1.45 | 1.46  | 1.61 | 1.61  | 1.60 | 1.62  | 1.78 | 1.78  | 1.78 | 1.79  | 1.97 | 1.97  | 1.97 | 1.98  | 2.20 | 2.20  | 2.20 | 2.21  |
|       |     | Amps  | 4.2  | 4.2   | 4.2  | 4.3   | 4.8  | 4.8   | 4.8  | 4.9   | 5.5  | 5.5   | 5.5  | 5.6   | 6.3  | 6.3   | 6.3  | 6.3   | 7.1  | 7.1   | 7.1  | 7.2   | 8.1  | 8.1   | 8.1  | 8.2   |
|       |     | Hi PR | 236  | 237   | 238  | 242.5 | 273  | 274   | 275  | 279.4 | 311  | 312   | 314  | 318.0 | 353  | 354   | 356  | 359.6 | 398  | 399   | 400  | 404.4 | 446  | 447   | 448  | 452.3 |
| Lo PR | 128 | 129   | 132  | 137.7 | 135  | 137   | 140  | 145.4 | 142  | 144   | 147  | 152.1 | 148  | 149   | 152  | 157.8 | 153  | 155   | 158  | 163.3 | 160  | 162   | 165  | 170.3 |      |       |
| 910   | 910 | MBh   | 25.9 | 26.3  | 27.0 | 28.1  | 25.7 | 26.0  | 26.8 | 27.9  | 25.0 | 25.4  | 26.1 | 27.3  | 23.9 | 24.3  | 25.0 | 26.1  | 22.5 | 22.9  | 23.6 | 24.8  | 21.3 | 21.6  | 22.4 | 23.5  |
|       |     | S/T   | 0.86 | 0.78  | 0.64 | 0.5   | 1.00 | 0.79  | 0.65 | 0.5   | 1.00 | 0.81  | 0.67 | 0.5   | 1.00 | 0.83  | 0.69 | 0.5   | 1.00 | 1.00  | 0.72 | 0.6   | 1.00 | 1.00  | 0.77 | 0.6   |
|       |     | ΔT    | 21   | 19    | 16   | 12    | 21   | 19    | 16   | 12    | 21   | 19    | 16   | 13    | 21   | 19    | 16   | 12    | 21   | 19    | 16   | 12    | 22   | 20    | 17   | 13    |
|       |     | KW    | 1.31 | 1.31  | 1.31 | 1.3   | 1.46 | 1.46  | 1.45 | 1.5   | 1.62 | 1.62  | 1.61 | 1.6   | 1.79 | 1.79  | 1.79 | 1.8   | 1.98 | 1.98  | 1.98 | 2.0   | 2.21 | 2.21  | 2.21 | 2.2   |
|       |     | Amps  | 4.3  | 4.3   | 4.2  | 4.3   | 4.9  | 4.9   | 4.9  | 4.9   | 5.6  | 5.6   | 5.6  | 5.6   | 6.3  | 6.3   | 6.3  | 6.4   | 7.2  | 7.2   | 7.2  | 7.2   | 8.2  | 8.2   | 8.1  | 8.2   |
|       |     | Hi PR | 238  | 239   | 241  | 245.1 | 275  | 276   | 278  | 282.0 | 314  | 315   | 316  | 320.6 | 355  | 356   | 358  | 362.2 | 400  | 401   | 403  | 407.0 | 448  | 449   | 451  | 454.8 |
| Lo PR | 130 | 132   | 135  | 140.5 | 138  | 140   | 143  | 148.2 | 145  | 146   | 150  | 154.9 | 150  | 152   | 155  | 160.5 | 156  | 158   | 161  | 166.1 | 163  | 165   | 168  | 173.1 |      |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |       |       |      |      |       |       |      |      |       |       | ENTERING INDOOR WET BULB TEMPERATURE |      |       |       |       |      |       |       |       |      |       |       |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|
|       |         | 65°F                        |      |       |       | 75°F |      |       |       | 85°F |      |       |       | 95°F                                 |      |       |       | 105°F |      |       |       | 115°F |      |       |       |
|       |         | 59                          | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59                                   | 63   | 67    | 71    | 59    | 63   | 67    | 71    | 59    | 63   | 67    | 71    |
| 80    | MBh     | 25.2                        | 25.5 | 26.3  | 27.4  | 24.9 | 25.3 | 26.0  | 27.2  | 24.3 | 24.6 | 25.4  | 26.5  | 23.2                                 | 23.5 | 24.3  | 25.4  | 21.8  | 22.1 | 22.9  | 24.0  | 20.5  | 20.9 | 21.6  | 22.8  |
|       | S/T     | 1.00                        | 0.80 | 0.66  | 0.5   | 1.00 | 0.81 | 0.67  | 0.5   | 1.00 | 0.84 | 0.70  | 0.6   | 1.00                                 | 1.00 | 0.72  | 0.6   | 1.00  | 1.00 | 0.74  | 0.6   | 1.00  | 1.00 | 0.79  | 0.6   |
|       | ΔT      | 27                          | 26   | 22    | 19    | 27   | 25   | 22    | 19    | 28   | 26   | 22    | 19    | 27                                   | 25   | 22    | 19    | 27    | 25   | 22    | 18    | 28    | 26   | 23    | 20    |
|       | KW      | 1.30                        | 1.30 | 1.30  | 1.3   | 1.44 | 1.44 | 1.44  | 1.4   | 1.60 | 1.60 | 1.60  | 1.6   | 1.77                                 | 1.77 | 1.77  | 1.8   | 1.97  | 1.97 | 1.96  | 2.0   | 2.19  | 2.19 | 2.19  | 2.2   |
|       | Amps    | 4.2                         | 4.2  | 4.2   | 4.2   | 4.8  | 4.8  | 4.8   | 4.9   | 5.5  | 5.5  | 5.5   | 5.5   | 6.3                                  | 6.3  | 6.3   | 6.3   | 7.1   | 7.1  | 7.1   | 7.1   | 8.1   | 8.1  | 8.1   | 8.1   |
|       | Hi PR   | 234                         | 235  | 237   | 240.9 | 271  | 272  | 274   | 277.8 | 310  | 311  | 312   | 316.4 | 351                                  | 352  | 354   | 358.0 | 396   | 397  | 399   | 402.8 | 444   | 445  | 447   | 450.6 |
|       | Lo PR   | 126                         | 128  | 131   | 136.4 | 134  | 135  | 139   | 144.0 | 141  | 142  | 145   | 150.7 | 146                                  | 148  | 151   | 156.4 | 152   | 153  | 157   | 162.0 | 159   | 160  | 164   | 168.9 |
|       | MBh     | 25.5                        | 25.8 | 26.6  | 27.7  | 25.3 | 25.6 | 26.4  | 27.5  | 24.6 | 25.0 | 25.7  | 26.9  | 23.5                                 | 23.8 | 24.6  | 25.7  | 22.1  | 22.5 | 23.2  | 24.4  | 20.9  | 21.2 | 22.0  | 23.1  |
|       | S/T     | 1.00                        | 0.87 | 0.73  | 0.6   | 1.00 | 0.87 | 0.74  | 0.6   | 1.00 | 0.90 | 0.76  | 0.6   | 1.00                                 | 1.00 | 0.78  | 0.6   | 1.00  | 1.00 | 0.80  | 0.7   | 1.00  | 1.00 | 0.86  | 0.7   |
|       | ΔT      | 26                          | 24   | 21    | 18    | 26   | 24   | 21    | 18    | 26   | 25   | 21    | 18    | 26                                   | 24   | 21    | 18    | 26    | 24   | 21    | 17    | 27    | 25   | 22    | 18    |
| KW    | 1.31    | 1.31                        | 1.30 | 1.31  | 1.45  | 1.45 | 1.45 | 1.46  | 1.61  | 1.61 | 1.61 | 1.62  | 1.78  | 1.78                                 | 1.78 | 1.79  | 1.98  | 1.97  | 1.97 | 1.98  | 2.20  | 2.20  | 2.20 | 2.21  |       |
| Amps  | 4.2     | 4.2                         | 4.2  | 4.3   | 4.9   | 4.8  | 4.8  | 4.9   | 5.5   | 5.5  | 5.5  | 5.6   | 6.3   | 6.3                                  | 6.3  | 6.3   | 7.1   | 7.1   | 7.1  | 7.2   | 8.1   | 8.1   | 8.1  | 8.2   |       |
| Hi PR | 236     | 237                         | 239  | 242.9 | 273   | 274  | 276  | 279.8 | 312   | 313  | 314  | 318.4 | 353   | 354                                  | 356  | 360.0 | 398   | 399   | 401  | 404.8 | 446   | 447   | 449  | 452.7 |       |
| Lo PR | 128     | 130                         | 133  | 138.3 | 136   | 137  | 141  | 145.9 | 143   | 144  | 147  | 152.6 | 148   | 150                                  | 153  | 158.3 | 154   | 155   | 159  | 163.9 | 161   | 162   | 165  | 170.8 |       |
| MBh   | 26.0    | 26.4                        | 27.1 | 28.3  | 25.8  | 26.2 | 26.9 | 28.1  | 25.2  | 25.5 | 26.3 | 27.4  | 24.0  | 24.4                                 | 25.1 | 26.3  | 22.7  | 23.0  | 23.8 | 24.9  | 21.4  | 21.8  | 22.5 | 23.6  |       |
| S/T   | 1.00    | 0.91                        | 0.77 | 0.6   | 1.00  | 0.92 | 0.78 | 0.6   | 1.00  | 1.00 | 0.80 | 0.7   | 1.00  | 1.00                                 | 0.82 | 0.7   | 1.00  | 1.00  | 0.84 | 0.7   | 1.00  | 1.00  | 1.00 | 0.8   |       |
| ΔT    | 25      | 23                          | 20   | 16    | 25    | 23   | 20   | 16    | 25    | 23   | 20   | 17    | 25    | 23                                   | 20   | 16    | 25    | 23    | 20   | 16    | 26    | 24    | 21   | 17    |       |
| KW    | 1.31    | 1.31                        | 1.31 | 1.3   | 1.46  | 1.46 | 1.45 | 1.5   | 1.62  | 1.62 | 1.61 | 1.6   | 1.79  | 1.79                                 | 1.79 | 1.8   | 1.98  | 1.98  | 1.98 | 2.0   | 2.21  | 2.21  | 2.21 | 2.2   |       |
| Amps  | 4.3     | 4.3                         | 4.3  | 4.3   | 4.9   | 4.9  | 4.9  | 4.9   | 5.6   | 5.6  | 5.6  | 5.6   | 6.3   | 6.3                                  | 6.3  | 6.4   | 7.2   | 7.2   | 7.2  | 7.2   | 8.2   | 8.2   | 8.1  | 8.2   |       |
| Hi PR | 239     | 240                         | 241  | 245.5 | 276   | 277  | 278  | 282.4 | 314   | 315  | 317  | 321.0 | 356   | 357                                  | 359  | 362.6 | 401   | 402   | 403  | 407.4 | 449   | 450   | 451  | 455.3 |       |
| Lo PR | 131     | 133                         | 136  | 141.1 | 139   | 140  | 143  | 148.7 | 145   | 147  | 150  | 155.4 | 151   | 153                                  | 156  | 161.1 | 157   | 158   | 161  | 166.7 | 164   | 165   | 168  | 173.6 |       |
| 85    | MBh     | 25.6                        | 25.9 | 26.7  | 27.8  | 25.4 | 25.7 | 26.5  | 27.6  | 24.7 | 25.1 | 25.8  | 26.9  | 23.6                                 | 23.9 | 24.7  | 25.8  | 22.2  | 22.6 | 23.3  | 24.4  | 20.9  | 21.3 | 22.0  | 23.2  |
|       | S/T     | 1.00                        | 0.91 | 0.77  | 0.6   | 1.00 | 1.00 | 0.78  | 0.6   | 1.00 | 1.00 | 0.80  | 0.7   | 1.00                                 | 1.00 | 0.82  | 0.7   | 1.00  | 1.00 | 1.00  | 0.7   | 1.00  | 1.00 | 1.00  | 0.7   |
|       | ΔT      | 31                          | 29   | 26    | 22    | 31   | 29   | 26    | 22    | 31   | 29   | 26    | 22    | 31                                   | 29   | 26    | 22    | 31    | 29   | 25    | 22    | 32    | 30   | 27    | 23    |
|       | KW      | 1.30                        | 1.30 | 1.30  | 1.3   | 1.44 | 1.44 | 1.44  | 1.5   | 1.60 | 1.60 | 1.60  | 1.6   | 1.78                                 | 1.78 | 1.77  | 1.8   | 1.97  | 1.97 | 1.97  | 2.0   | 2.20  | 2.20 | 2.19  | 2.2   |
|       | Amps    | 4.2                         | 4.2  | 4.2   | 4.2   | 4.8  | 4.8  | 4.8   | 4.9   | 5.5  | 5.5  | 5.5   | 5.6   | 6.3                                  | 6.3  | 6.3   | 6.3   | 7.1   | 7.1  | 7.1   | 7.1   | 8.1   | 8.1  | 8.1   | 8.1   |
|       | Hi PR   | 235                         | 236  | 238   | 242.0 | 272  | 273  | 275   | 278.9 | 311  | 312  | 313   | 317.5 | 352                                  | 353  | 355   | 359.1 | 397   | 398  | 400   | 403.9 | 445   | 446  | 448   | 451.7 |
|       | Lo PR   | 128                         | 130  | 133   | 138.3 | 136  | 137  | 141   | 145.9 | 143  | 144  | 147   | 152.6 | 148                                  | 150  | 153   | 158.3 | 154   | 155  | 159   | 163.9 | 161   | 162  | 165   | 170.8 |
|       | MBh     | 25.9                        | 26.3 | 27.0  | 28.2  | 25.7 | 26.0 | 26.8  | 27.9  | 25.0 | 25.4 | 26.1  | 27.3  | 23.9                                 | 24.3 | 25.0  | 26.2  | 22.5  | 22.9 | 23.6  | 24.8  | 21.3  | 21.6 | 22.4  | 23.5  |
|       | S/T     | 1.00                        | 0.97 | 0.83  | 0.7   | 1.00 | 1.00 | 0.84  | 0.7   | 1.00 | 1.00 | 0.86  | 0.7   | 1.00                                 | 1.00 | 0.88  | 0.7   | 1.00  | 1.00 | 1.00  | 0.8   | 1.00  | 1.00 | 1.00  | 0.8   |
|       | ΔT      | 30                          | 28   | 25    | 21    | 30   | 28   | 25    | 21    | 30   | 28   | 25    | 21    | 30                                   | 28   | 25    | 21    | 29    | 28   | 24    | 21    | 31    | 29   | 25    | 22    |
| KW    | 1.31    | 1.31                        | 1.31 | 1.32  | 1.45  | 1.45 | 1.45 | 1.46  | 1.61  | 1.61 | 1.61 | 1.62  | 1.78  | 1.78                                 | 1.78 | 1.79  | 1.98  | 1.98  | 1.97 | 1.99  | 2.20  | 2.20  | 2.20 | 2.21  |       |
| Amps  | 4.2     | 4.2                         | 4.2  | 4.3   | 4.9   | 4.9  | 4.9  | 4.9   | 5.6   | 5.6  | 5.6  | 5.6   | 6.3   | 6.3                                  | 6.3  | 6.3   | 7.2   | 7.1   | 7.1  | 7.2   | 8.1   | 8.1   | 8.1  | 8.2   |       |
| Hi PR | 237     | 238                         | 240  | 244.0 | 274   | 275  | 277  | 280.9 | 313   | 314  | 315  | 319.5 | 354   | 355                                  | 357  | 361.1 | 399   | 400   | 402  | 405.9 | 447   | 448   | 450  | 453.8 |       |
| Lo PR | 130     | 132                         | 135  | 140.2 | 138   | 139  | 142  | 147.8 | 144   | 146  | 149  | 154.5 | 150   | 152                                  | 155  | 160.2 | 156   | 157   | 160  | 165.8 | 163   | 164   | 167  | 172.7 |       |
| MBh   | 26.5    | 26.8                        | 27.6 | 28.7  | 26.2  | 26.6 | 27.3 | 28.5  | 25.6  | 25.9 | 26.7 | 27.8  | 24.5  | 24.8                                 | 25.6 | 26.7  | 23.1  | 23.4  | 24.2 | 25.3  | 21.8  | 22.2  | 22.9 | 24.1  |       |
| S/T   | 1.00    | 1.00                        | 0.87 | 0.7   | 1.00  | 1.00 | 0.88 | 0.7   | 1.00  | 1.00 | 0.91 | 0.8   | 1.00  | 1.00                                 | 0.93 | 0.8   | 1.00  | 1.00  | 1.00 | 0.8   | 1.00  | 1.00  | 1.00 | 0.9   |       |
| ΔT    | 29      | 27                          | 23   | 20    | 28    | 27   | 23   | 20    | 29    | 27   | 24   | 20    | 28    | 27                                   | 23   | 20    | 28    | 26    | 23   | 20    | 29    | 28    | 24   | 21    |       |
| KW    | 1.32    | 1.32                        | 1.31 | 1.3   | 1.46  | 1.46 | 1.46 | 1.5   | 1.62  | 1.62 | 1.62 | 1.6   | 1.79  | 1.79                                 | 1.79 | 1.8   | 1.99  | 1.98  | 1.98 | 2.0   | 2.21  | 2.21  | 2.21 | 2.2   |       |
| Amps  | 4.3     | 4.3                         | 4.3  | 4.3   | 4.9   | 4.9  | 4.9  | 4.9   | 5.6   | 5.6  | 5.6  | 5.6   | 6.3   | 6.3                                  | 6.3  | 6.4   | 7.2   | 7.2   | 7.2  | 7.2   | 8.2   | 8.2   | 8.2  | 8.2   |       |
| Hi PR | 240     | 241                         | 243  | 246.6 | 277   | 278  | 279  | 283.5 | 315   | 316  | 318  | 322.1 | 357   | 358                                  | 360  | 363.7 | 402   | 403   | 404  | 408.5 | 450   | 451   | 452  | 456.4 |       |
| Lo PR | 133     | 134                         | 138  | 143.0 | 141   | 142  | 145  | 150.6 | 147   | 149  | 152  | 157.3 | 153   | 154                                  | 158  | 163.0 | 158   | 160   | 163  | 168.5 | 165   | 167   | 170  | 175.5 |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB  | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |      |      |      |   |
|------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|---|
|      |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F |      |      |      | 105°F |      |      |      | 115°F |      |      |      |   |
|      |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |   |
| 70   | 1400    | MBh                         | 48.4 | 49.1 | 50.5 | -    | 48.0 | 48.7 | 50.1 | -    | 46.8 | 47.4 | 48.9 | -    | 44.6 | 45.3 | 46.7 | -     | 42.0 | 42.7 | 44.1 | -     | 39.6 | 40.3 | 41.7 | - |
|      |         | S/T                         | 0.62 | 0.55 | 0.42 | -    | 0.63 | 0.56 | 0.43 | -    | 0.65 | 0.58 | 0.45 | -    | 0.67 | 0.60 | 0.47 | -     | 1.00 | 0.62 | 0.49 | -     | 1.00 | 0.67 | 0.54 | - |
|      |         | ΔT                          | 20   | 18   | 15   | -    | 20   | 18   | 14   | -    | 20   | 18   | 15   | -    | 20   | 18   | 14   | -     | 20   | 18   | 14   | -     | 21   | 19   | 15   | - |
|      |         | KW                          | 2.82 | 2.81 | 2.81 | -    | 3.13 | 3.12 | 3.12 | -    | 3.48 | 3.47 | 3.47 | -    | 3.85 | 3.85 | 3.84 | -     | 4.27 | 4.27 | 4.26 | -     | 4.77 | 4.76 | 4.76 | - |
|      |         | Amps                        | 9.6  | 9.5  | 9.5  | -    | 10.9 | 10.9 | 10.9 | -    | 12.4 | 12.4 | 12.4 | -    | 14.1 | 14.0 | 14.0 | -     | 15.9 | 15.9 | 15.9 | -     | 18.0 | 18.0 | 18.0 | - |
|      | 1525    | Hi PR                       | 239  | 240  | 242  | -    | 276  | 277  | 279  | -    | 315  | 316  | 318  | -    | 358  | 359  | 360  | -     | 403  | 404  | 406  | -     | 452  | 453  | 454  | - |
|      |         | Lo PR                       | 121  | 121  | 124  | -    | 127  | 129  | 132  | -    | 133  | 135  | 138  | -    | 139  | 140  | 143  | -     | 144  | 145  | 148  | -     | 151  | 152  | 155  | - |
|      |         | MBh                         | 49.0 | 49.6 | 51.1 | -    | 48.5 | 49.2 | 50.6 | -    | 47.3 | 48.0 | 49.4 | -    | 45.1 | 45.8 | 47.2 | -     | 42.5 | 43.2 | 44.6 | -     | 40.1 | 40.8 | 42.2 | - |
|      |         | S/T                         | 0.65 | 0.58 | 0.45 | -    | 0.65 | 0.58 | 0.46 | -    | 0.68 | 0.61 | 0.48 | -    | 0.70 | 0.62 | 0.50 | -     | 1.00 | 0.64 | 0.52 | -     | 1.00 | 0.69 | 0.57 | - |
|      |         | ΔT                          | 19   | 17   | 14   | -    | 19   | 17   | 14   | -    | 20   | 18   | 14   | -    | 19   | 17   | 14   | -     | 19   | 17   | 13   | -     | 20   | 18   | 15   | - |
| 1650 | KW      | 2.83                        | 2.82 | 2.82 | -    | 3.14 | 3.13 | 3.13 | -    | 3.49 | 3.48 | 3.48 | -    | 3.86 | 3.86 | 3.85 | -    | 4.28  | 4.28 | 4.27 | -    | 4.78  | 4.77 | 4.77 | -    |   |
|      | Amps    | 9.6                         | 9.6  | 9.6  | -    | 11.0 | 10.9 | 10.9 | -    | 12.5 | 12.5 | 12.4 | -    | 14.1 | 14.1 | 14.1 | -    | 15.9  | 15.9 | 15.9 | -    | 18.1  | 18.1 | 18.0 | -    |   |
|      | Hi PR   | 240                         | 241  | 243  | -    | 278  | 279  | 280  | -    | 317  | 318  | 320  | -    | 359  | 360  | 362  | -    | 404   | 405  | 407  | -    | 453   | 454  | 456  | -    |   |
|      | Lo PR   | 121                         | 123  | 126  | -    | 128  | 130  | 133  | -    | 135  | 136  | 139  | -    | 140  | 142  | 145  | -    | 145   | 147  | 150  | -    | 152   | 153  | 156  | -    |   |
|      | MBh     | 49.6                        | 50.2 | 51.7 | -    | 49.1 | 49.8 | 51.2 | -    | 47.9 | 48.6 | 50.0 | -    | 45.7 | 46.4 | 47.8 | -    | 43.1  | 43.8 | 45.2 | -    | 40.7  | 41.4 | 42.8 | -    |   |
| 75   | 1400    | S/T                         | 0.66 | 0.59 | 0.46 | -    | 0.67 | 0.60 | 0.47 | -    | 0.69 | 0.62 | 0.49 | -    | 0.71 | 0.64 | 0.51 | -     | 1.00 | 0.66 | 0.53 | -     | 1.00 | 0.71 | 0.58 | - |
|      |         | ΔT                          | 19   | 17   | 13   | -    | 19   | 17   | 13   | -    | 19   | 17   | 13   | -    | 19   | 17   | 13   | -     | 18   | 16   | 13   | -     | 20   | 18   | 14   | - |
|      |         | KW                          | 2.83 | 2.83 | 2.83 | -    | 3.15 | 3.14 | 3.14 | -    | 3.49 | 3.49 | 3.49 | -    | 3.87 | 3.87 | 3.86 | -     | 4.29 | 4.29 | 4.28 | -     | 4.78 | 4.78 | 4.78 | - |
|      |         | Amps                        | 9.6  | 9.6  | 9.6  | -    | 11.0 | 11.0 | 11.0 | -    | 12.5 | 12.5 | 12.5 | -    | 14.1 | 14.1 | 14.1 | -     | 16.0 | 16.0 | 15.9 | -     | 18.1 | 18.1 | 18.1 | - |
|      |         | Hi PR                       | 242  | 243  | 244  | -    | 279  | 280  | 282  | -    | 318  | 319  | 321  | -    | 360  | 361  | 363  | -     | 406  | 407  | 409  | -     | 454  | 455  | 457  | - |
|      | 1525    | Lo PR                       | 120  | 121  | 124  | -    | 127  | 129  | 132  | -    | 133  | 135  | 138  | -    | 139  | 140  | 143  | -     | 144  | 145  | 148  | -     | 151  | 152  | 155  | - |
|      |         | MBh                         | 49.0 | 49.7 | 51.1 | -    | 48.6 | 49.2 | 50.7 | -    | 47.3 | 48.0 | 49.4 | -    | 45.2 | 45.8 | 47.3 | -     | 42.5 | 43.2 | 44.7 | -     | 40.2 | 40.8 | 42.3 | - |
|      |         | S/T                         | 0.77 | 0.70 | 0.57 | -    | 0.77 | 0.70 | 0.58 | -    | 1.00 | 0.73 | 0.60 | -    | 1.00 | 0.72 | 0.59 | -     | 1.00 | 0.77 | 0.64 | -     | 1.00 | 0.81 | 0.69 | - |
|      |         | ΔT                          | 24   | 22   | 18   | -    | 24   | 22   | 18   | -    | 24   | 22   | 18   | -    | 24   | 22   | 18   | -     | 23   | 21   | 18   | -     | 25   | 23   | 19   | - |
|      |         | KW                          | 2.82 | 2.82 | 2.82 | -    | 3.14 | 3.13 | 3.13 | -    | 3.48 | 3.48 | 3.48 | -    | 3.86 | 3.85 | 3.85 | -     | 4.28 | 4.28 | 4.27 | -     | 4.77 | 4.77 | 4.77 | - |
| 1650 | Amps    | 9.6                         | 9.6  | 9.6  | -    | 10.9 | 10.9 | 10.9 | -    | 12.5 | 12.4 | 12.4 | -    | 14.1 | 14.1 | 14.1 | -    | 15.9  | 15.9 | 15.9 | -    | 18.1  | 18.1 | 18.0 | -    |   |
|      | Hi PR   | 240                         | 242  | 243  | -    | 278  | 279  | 281  | -    | 316  | 317  | 318  | -    | 358  | 359  | 360  | -    | 403   | 404  | 406  | -    | 452   | 453  | 454  | -    |   |
|      | Lo PR   | 120                         | 121  | 124  | -    | 127  | 129  | 132  | -    | 133  | 135  | 138  | -    | 139  | 140  | 143  | -    | 144   | 145  | 148  | -    | 151   | 152  | 155  | -    |   |
|      | MBh     | 49.0                        | 49.7 | 51.1 | -    | 48.6 | 49.2 | 50.7 | -    | 47.3 | 48.0 | 49.4 | -    | 45.2 | 45.8 | 47.3 | -    | 42.5  | 43.2 | 44.7 | -    | 40.2  | 40.8 | 42.3 | -    |   |
|      | S/T     | 0.77                        | 0.70 | 0.57 | -    | 0.77 | 0.70 | 0.58 | -    | 1.00 | 0.73 | 0.60 | -    | 1.00 | 0.74 | 0.62 | -    | 1.00  | 0.77 | 0.64 | -    | 1.00  | 0.81 | 0.69 | -    |   |
| 75   | 1400    | ΔT                          | 24   | 22   | 18   | -    | 24   | 22   | 18   | -    | 24   | 22   | 18   | -    | 24   | 22   | 18   | -     | 23   | 21   | 18   | -     | 25   | 23   | 19   | - |
|      |         | KW                          | 2.82 | 2.82 | 2.82 | -    | 3.14 | 3.13 | 3.13 | -    | 3.48 | 3.48 | 3.48 | -    | 3.86 | 3.85 | 3.85 | -     | 4.28 | 4.28 | 4.27 | -     | 4.77 | 4.77 | 4.77 | - |
|      |         | Amps                        | 9.6  | 9.6  | 9.6  | -    | 10.9 | 10.9 | 10.9 | -    | 12.5 | 12.4 | 12.4 | -    | 14.1 | 14.1 | 14.1 | -     | 15.9 | 15.9 | 15.9 | -     | 18.1 | 18.1 | 18.0 | - |
|      |         | Hi PR                       | 240  | 242  | 243  | -    | 278  | 279  | 281  | -    | 316  | 317  | 318  | -    | 358  | 359  | 360  | -     | 403  | 404  | 406  | -     | 452  | 453  | 454  | - |
|      |         | Lo PR                       | 120  | 121  | 124  | -    | 127  | 129  | 132  | -    | 133  | 135  | 138  | -    | 139  | 140  | 143  | -     | 144  | 145  | 148  | -     | 151  | 152  | 155  | - |
|      | 1525    | MBh                         | 49.0 | 49.7 | 51.1 | -    | 48.6 | 49.2 | 50.7 | -    | 47.3 | 48.0 | 49.4 | -    | 45.2 | 45.8 | 47.3 | -     | 42.5 | 43.2 | 44.7 | -     | 40.2 | 40.8 | 42.3 | - |
|      |         | S/T                         | 0.77 | 0.70 | 0.57 | -    | 0.77 | 0.70 | 0.58 | -    | 1.00 | 0.73 | 0.60 | -    | 1.00 | 0.74 | 0.62 | -     | 1.00 | 0.77 | 0.64 | -     | 1.00 | 0.81 | 0.69 | - |
|      |         | ΔT                          | 24   | 22   | 18   | -    | 24   | 22   | 18   | -    | 24   | 22   | 18   | -    | 24   | 22   | 18   | -     | 23   | 21   | 18   | -     | 25   | 23   | 19   | - |
|      |         | KW                          | 2.82 | 2.82 | 2.82 | -    | 3.14 | 3.13 | 3.13 | -    | 3.48 | 3.48 | 3.48 | -    | 3.86 | 3.85 | 3.85 | -     | 4.28 | 4.28 | 4.27 | -     | 4.77 | 4.77 | 4.77 | - |
|      |         | Amps                        | 9.6  | 9.6  | 9.6  | -    | 10.9 | 10.9 | 10.9 | -    | 12.5 | 12.4 | 12.4 | -    | 14.1 | 14.1 | 14.1 | -     | 15.9 | 15.9 | 15.9 | -     | 18.1 | 18.1 | 18.0 | - |
| 1650 | Hi PR   | 240                         | 242  | 243  | -    | 278  | 279  | 281  | -    | 316  | 317  | 318  | -    | 358  | 359  | 360  | -    | 403   | 404  | 406  | -    | 452   | 453  | 454  | -    |   |
|      | Lo PR   | 121                         | 123  | 126  | -    | 128  | 130  | 133  | -    | 135  | 136  | 139  | -    | 140  | 142  | 145  | -    | 145   | 147  | 150  | -    | 152   | 153  | 156  | -    |   |
|      | MBh     | 49.6                        | 50.3 | 51.7 | -    | 49.2 | 49.8 | 51.3 | -    | 47.9 | 48.6 | 50.0 | -    | 45.8 | 46.4 | 47.9 | -    | 43.1  | 43.8 | 45.2 | -    | 40.7  | 41.4 | 42.9 | -    |   |
|      | S/T     | 0.78                        | 0.71 | 0.58 | -    | 0.79 | 0.72 | 0.59 | -    | 1.00 | 0.74 | 0.61 | -    | 1.00 | 0.76 | 0.63 | -    | 1.00  | 0.78 | 0.65 | -    | 1.00  | 1.00 | 0.70 | -    |   |
|      | ΔT      | 23                          | 21   | 17   | -    | 23   | 21   | 17   | -    | 23   | 21   | 18   | -    | 23   | 21   | 17   | -    | 23    | 21   | 17   | -    | 24    | 22   | 18   | -    |   |
| 1650 | KW      | 2.83                        | 2.83 | 2.82 | -    | 3.14 | 3.14 | 3.14 | -    | 3.49 | 3.49 | 3.48 | -    | 3.87 | 3.87 | 3.86 | -    | 4.29  | 4.29 | 4.28 | -    | 4.78  | 4.78 | 4.77 | -    |   |
|      | Amps    | 9.6                         | 9.6  | 9.6  | -    | 11.0 | 11.0 | 10.9 | -    | 12.5 | 12.5 | 12.5 | -    | 14.1 | 14.1 | 14.1 | -    | 16.0  | 15.9 | 15.9 | -    | 18.1  | 18.1 | 18.1 | -    |   |
|      | Hi PR   | 242                         | 243  | 245  | -    | 279  | 280  | 282  | -    | 318  | 319  | 321  | -    | 361  | 362  | 363  | -    | 406   | 407  | 409  | -    | 455   | 456  | 457  | -    |   |
|      | Lo PR   | 123                         | 124  | 127  | -    | 130  | 131  | 134  | -    | 136  | 138  | 141  | -    | 142  | 143  | 146  | -    | 147   | 148  | 151  | -    | 153   | 155  | 158  | -    |   |
|      | MBh     | 49.6                        | 50.3 | 51.7 | -    | 49.2 | 49.8 | 51.3 | -    | 47.9 | 48.6 | 50.0 | -    | 45.8 | 46.4 | 47.9 | -    | 43.1  | 43.8 | 45.2 | -    | 40.7  | 41.4 | 42.9 | -    |   |

Shaded area is ACCA (TVA) conditions  
 kW = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |       |       |      |      |       |       |      |      |       |       | ENTERING INDOOR WET BULB TEMPERATURE |      |       |       |       |      |       |       |       |      |       |       |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|
|       |         | 65°F                        |      |       |       | 75°F |      |       |       | 85°F |      |       |       | 95°F                                 |      |       |       | 105°F |      |       |       | 115°F |      |       |       |
|       |         | 59                          | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59                                   | 63   | 67    | 71    | 59    | 63   | 67    | 71    | 59    | 63   | 67    | 71    |
| 80    | MBh     | 48.7                        | 49.4 | 50.8  | 53.0  | 48.3 | 49.0 | 50.4  | 52.6  | 47.0 | 47.7 | 49.1  | 51.3  | 44.9                                 | 45.6 | 47.0  | 49.2  | 42.3  | 42.9 | 44.4  | 46.6  | 39.9  | 40.5 | 42.0  | 44.2  |
|       | S/T     | 0.86                        | 0.79 | 0.66  | 0.5   | 1.00 | 0.80 | 0.67  | 0.5   | 1.00 | 0.82 | 0.69  | 0.6   | 1.00                                 | 0.84 | 0.71  | 0.6   | 1.00  | 1.00 | 0.73  | 0.6   | 1.00  | 1.00 | 0.78  | 0.6   |
|       | ΔT      | 29                          | 27   | 23    | 19    | 29   | 27   | 23    | 20    | 29   | 27   | 23    | 20    | 29                                   | 27   | 23    | 19    | 29    | 27   | 23    | 19    | 30    | 28   | 24    | 20    |
|       | KW      | 2.82                        | 2.81 | 2.81  | 2.8   | 3.13 | 3.12 | 3.12  | 3.1   | 3.47 | 3.47 | 3.47  | 3.5   | 3.85                                 | 3.85 | 3.84  | 3.9   | 4.27  | 4.27 | 4.26  | 4.3   | 4.77  | 4.76 | 4.76  | 4.8   |
|       | Amps    | 9.6                         | 9.5  | 9.5   | 9.6   | 10.9 | 10.9 | 10.9  | 11.0  | 12.4 | 12.4 | 12.4  | 12.5  | 14.1                                 | 14.0 | 14.0  | 14.1  | 15.9  | 15.9 | 15.9  | 16.0  | 18.0  | 18.0 | 18.0  | 18.1  |
|       | Hi PR   | 240                         | 241  | 242   | 246.4 | 277  | 278  | 280   | 283.7 | 316  | 317  | 319   | 322.9 | 358                                  | 359  | 361   | 365.1 | 404   | 405  | 406   | 410.5 | 452   | 453  | 455   | 459.0 |
|       | Lo PR   | 120                         | 122  | 125   | 130.0 | 128  | 129  | 132   | 137.2 | 134  | 135  | 138   | 143.5 | 139                                  | 141  | 144   | 148.8 | 145   | 146  | 149   | 154.0 | 151   | 153  | 156   | 160.6 |
|       | MBh     | 49.2                        | 49.9 | 51.3  | 53.5  | 48.8 | 49.5 | 50.9  | 53.1  | 47.6 | 48.2 | 49.7  | 51.9  | 45.4                                 | 46.1 | 47.5  | 49.7  | 42.8  | 43.5 | 44.9  | 47.1  | 40.4  | 41.1 | 42.5  | 44.7  |
|       | S/T     | 0.89                        | 0.81 | 0.69  | 0.6   | 1.00 | 0.82 | 0.69  | 0.6   | 1.00 | 0.84 | 0.72  | 0.6   | 1.00                                 | 0.86 | 0.74  | 0.6   | 1.00  | 1.00 | 0.76  | 0.6   | 1.00  | 1.00 | 0.80  | 0.7   |
|       | ΔT      | 28                          | 26   | 22    | 19    | 28   | 26   | 22    | 19    | 28   | 26   | 23    | 19    | 28                                   | 26   | 22    | 19    | 28    | 26   | 22    | 18    | 29    | 27   | 23    | 20    |
| KW    | 2.83    | 2.82                        | 2.82 | 2.84  | 3.14  | 3.13 | 3.13 | 3.15  | 3.48  | 3.48 | 3.48 | 3.50  | 3.86  | 3.86                                 | 3.85 | 3.88  | 4.28  | 4.28  | 4.27 | 4.30  | 4.77  | 4.77  | 4.77 | 4.79  |       |
| Amps  | 9.6     | 9.6                         | 9.6  | 9.7   | 11.0  | 10.9 | 10.9 | 11.0  | 12.5  | 12.5 | 12.4 | 12.5  | 14.1  | 14.1                                 | 14.1 | 14.2  | 15.9  | 15.9  | 15.9 | 16.0  | 18.1  | 18.1  | 18.0 | 18.1  |       |
| Hi PR | 241     | 242                         | 244  | 247.8 | 278   | 279  | 281  | 285.1 | 317   | 318  | 320  | 324.3 | 360   | 361                                  | 362  | 366.5 | 405   | 406   | 408  | 411.9 | 454   | 455   | 456  | 460.4 |       |
| Lo PR | 122     | 123                         | 126  | 131.3 | 129   | 130  | 134  | 138.5 | 135   | 137  | 140  | 144.8 | 141   | 142                                  | 145  | 150.2 | 146   | 147   | 150  | 155.4 | 152   | 154   | 157  | 161.9 |       |
| MBh   | 49.8    | 50.5                        | 51.9 | 54.1  | 49.4  | 50.1 | 51.5 | 53.7  | 48.2  | 48.8 | 50.3 | 52.5  | 46.0  | 46.7                                 | 48.1 | 50.3  | 43.4  | 44.1  | 45.5 | 47.7  | 41.0  | 41.7  | 43.1 | 45.3  |       |
| S/T   | 1.00    | 0.83                        | 0.70 | 0.6   | 1.00  | 0.83 | 0.71 | 0.6   | 1.00  | 0.86 | 0.73 | 0.6   | 1.00  | 0.88                                 | 0.75 | 0.6   | 1.00  | 1.00  | 0.77 | 0.6   | 1.00  | 1.00  | 0.82 | 0.7   |       |
| ΔT    | 27      | 26                          | 22   | 18    | 27    | 25   | 22   | 18    | 28    | 26   | 22   | 18    | 27    | 25                                   | 22   | 18    | 27    | 25    | 21   | 18    | 28    | 26    | 23   | 19    |       |
| KW    | 2.83    | 2.83                        | 2.83 | 2.9   | 3.15  | 3.14 | 3.14 | 3.2   | 3.49  | 3.49 | 3.49 | 3.5   | 3.87  | 3.87                                 | 3.86 | 3.9   | 4.29  | 4.29  | 4.28 | 4.3   | 4.78  | 4.78  | 4.78 | 4.8   |       |
| Amps  | 9.6     | 9.6                         | 9.6  | 9.7   | 11.0  | 11.0 | 11.0 | 11.1  | 12.5  | 12.5 | 12.5 | 12.6  | 14.1  | 14.1                                 | 14.1 | 14.2  | 16.0  | 16.0  | 15.9 | 16.0  | 18.1  | 18.1  | 18.1 | 18.2  |       |
| Hi PR | 242     | 243                         | 245  | 249.2 | 280   | 281  | 282  | 286.5 | 319   | 320  | 322  | 325.7 | 361   | 362                                  | 364  | 367.9 | 407   | 408   | 409  | 413.3 | 455   | 456   | 458  | 461.8 |       |
| Lo PR | 123     | 125                         | 128  | 132.8 | 131   | 132  | 135  | 140.0 | 137   | 138  | 141  | 146.3 | 142   | 144                                  | 147  | 151.6 | 147   | 149   | 152  | 156.9 | 154   | 155   | 158  | 163.4 |       |
| 85    | MBh     | 49.5                        | 50.2 | 51.6  | 53.8  | 49.1 | 49.8 | 51.2  | 53.4  | 47.8 | 48.5 | 50.0  | 52.1  | 45.7                                 | 46.4 | 47.8  | 50.0  | 43.1  | 43.8 | 45.2  | 47.4  | 40.7  | 41.4 | 42.8  | 45.0  |
|       | S/T     | 1.00                        | 0.88 | 0.76  | 0.6   | 1.00 | 0.89 | 0.76  | 0.6   | 1.00 | 1.00 | 0.79  | 0.7   | 1.00                                 | 1.00 | 0.80  | 0.7   | 1.00  | 1.00 | 0.83  | 0.7   | 1.00  | 1.00 | 0.87  | 0.7   |
|       | ΔT      | 33                          | 31   | 27    | 23    | 33   | 31   | 27    | 23    | 33   | 31   | 27    | 24    | 33                                   | 31   | 27    | 23    | 32    | 30   | 27    | 23    | 34    | 32   | 28    | 24    |
|       | KW      | 2.82                        | 2.82 | 2.81  | 2.8   | 3.13 | 3.13 | 3.13  | 3.1   | 3.48 | 3.48 | 3.47  | 3.5   | 3.86                                 | 3.85 | 3.85  | 3.9   | 4.28  | 4.28 | 4.27  | 4.3   | 4.77  | 4.77 | 4.76  | 4.8   |
|       | Amps    | 9.6                         | 9.6  | 9.5   | 9.6   | 10.9 | 10.9 | 10.9  | 11.0  | 12.4 | 12.4 | 12.4  | 12.5  | 14.1                                 | 14.1 | 14.0  | 14.2  | 15.9  | 15.9 | 15.9  | 16.0  | 18.1  | 18.0 | 18.0  | 18.1  |
|       | Hi PR   | 241                         | 242  | 243   | 247.5 | 278  | 279  | 281   | 284.8 | 317  | 318  | 320   | 324.0 | 359                                  | 360  | 362   | 366.2 | 405   | 406  | 408   | 411.6 | 453   | 454  | 456   | 460.2 |
|       | Lo PR   | 122                         | 124  | 127   | 131.8 | 129  | 131  | 134   | 139.0 | 136  | 137  | 140   | 145.3 | 141                                  | 143  | 146   | 150.6 | 146   | 148  | 151   | 155.8 | 153   | 154  | 157   | 162.4 |
|       | MBh     | 50.1                        | 50.7 | 52.2  | 54.3  | 49.6 | 50.3 | 51.7  | 53.9  | 48.4 | 49.0 | 50.5  | 52.7  | 46.2                                 | 46.9 | 48.3  | 50.5  | 43.6  | 44.3 | 45.7  | 47.9  | 41.2  | 41.9 | 43.3  | 45.5  |
|       | S/T     | 1.00                        | 0.91 | 0.78  | 0.6   | 1.00 | 0.92 | 0.79  | 0.7   | 1.00 | 1.00 | 0.81  | 0.7   | 1.00                                 | 1.00 | 0.83  | 0.7   | 1.00  | 1.00 | 0.85  | 0.7   | 1.00  | 1.00 | 1.00  | 0.8   |
|       | ΔT      | 32                          | 30   | 26    | 23    | 32   | 30   | 26    | 23    | 32   | 30   | 27    | 23    | 32                                   | 30   | 26    | 22    | 32    | 30   | 26    | 22    | 33    | 31   | 27    | 23    |
| KW    | 2.83    | 2.83                        | 2.82 | 2.85  | 3.14  | 3.14 | 3.14 | 3.16  | 3.49  | 3.49 | 3.48 | 3.51  | 3.87  | 3.86                                 | 3.86 | 3.88  | 4.29  | 4.29  | 4.28 | 4.30  | 4.78  | 4.78  | 4.77 | 4.80  |       |
| Amps  | 9.6     | 9.6                         | 9.6  | 9.7   | 11.0  | 11.0 | 10.9 | 11.0  | 12.5  | 12.5 | 12.5 | 12.6  | 14.1  | 14.1                                 | 14.1 | 14.2  | 16.0  | 15.9  | 15.9 | 16.0  | 18.1  | 18.1  | 18.1 | 18.2  |       |
| Hi PR | 242     | 243                         | 245  | 248.9 | 279   | 280  | 282  | 286.2 | 319   | 320  | 321  | 325.4 | 361   | 362                                  | 363  | 367.6 | 406   | 407   | 409  | 413.0 | 455   | 456   | 457  | 461.5 |       |
| Lo PR | 124     | 125                         | 128  | 133.1 | 131   | 132  | 135  | 140.3 | 137   | 139  | 142  | 146.6 | 142   | 144                                  | 147  | 151.9 | 148   | 149   | 152  | 157.2 | 154   | 156   | 159  | 163.7 |       |
| MBh   | 50.6    | 51.3                        | 52.8 | 54.9  | 50.2  | 50.9 | 52.3 | 54.5  | 49.0  | 49.6 | 51.1 | 53.3  | 46.8  | 47.5                                 | 48.9 | 51.1  | 44.2  | 44.9  | 46.3 | 48.5  | 41.8  | 42.5  | 43.9 | 46.1  |       |
| S/T   | 1.00    | 0.92                        | 0.80 | 0.7   | 1.00  | 0.93 | 0.80 | 0.7   | 1.00  | 1.00 | 0.83 | 0.7   | 1.00  | 1.00                                 | 0.84 | 0.7   | 1.00  | 1.00  | 0.86 | 0.7   | 1.00  | 1.00  | 1.00 | 0.8   |       |
| ΔT    | 31      | 29                          | 26   | 22    | 31    | 29   | 26   | 22    | 32    | 30   | 26   | 22    | 31    | 29                                   | 26   | 22    | 31    | 29    | 25   | 22    | 32    | 30    | 27   | 23    |       |
| KW    | 2.84    | 2.84                        | 2.83 | 2.9   | 3.15  | 3.15 | 3.14 | 3.2   | 3.50  | 3.50 | 3.49 | 3.5   | 3.88  | 3.87                                 | 3.87 | 3.9   | 4.30  | 4.29  | 4.29 | 4.3   | 4.79  | 4.79  | 4.78 | 4.8   |       |
| Amps  | 9.7     | 9.7                         | 9.6  | 9.7   | 11.0  | 11.0 | 11.0 | 11.1  | 12.5  | 12.5 | 12.5 | 12.6  | 14.2  | 14.2                                 | 14.1 | 14.2  | 16.0  | 16.0  | 16.0 | 16.1  | 18.1  | 18.1  | 18.1 | 18.2  |       |
| Hi PR | 243     | 244                         | 246  | 250.3 | 281   | 282  | 284  | 287.6 | 320   | 321  | 323  | 326.8 | 362   | 363                                  | 365  | 369.0 | 408   | 409   | 410  | 414.4 | 456   | 457   | 459  | 463.0 |       |
| Lo PR | 125     | 127                         | 130  | 134.6 | 132   | 134  | 137  | 141.8 | 139   | 140  | 143  | 148.1 | 144   | 145                                  | 148  | 153.4 | 149   | 151   | 154  | 158.6 | 156   | 157   | 160  | 165.2 |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TVA) conditions  
 KW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB  | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |      |      |      |   |
|------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|---|
|      |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F |      |      |      | 105°F |      |      |      | 115°F |      |      |      |   |
|      |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |   |
| 70   | 940     | MBh                         | 34.5 | 34.9 | 36.0 | -    | 34.2 | 34.6 | 35.7 | -    | 33.3 | 33.7 | 34.8 | -    | 31.7 | 32.2 | 33.2 | -     | 29.8 | 30.3 | 31.3 | 0.0   | 28.1 | 28.6 | 29.6 | - |
|      |         | S/T                         | 0.60 | 0.52 | 0.39 | -    | 0.60 | 0.53 | 0.40 | -    | 0.63 | 0.55 | 0.42 | -    | 0.64 | 0.57 | 0.44 | -     | 1.00 | 0.59 | 0.46 | 0.0   | 1.00 | 0.64 | 0.51 | - |
|      |         | ΔT                          | 20   | 18   | 15   | -    | 20   | 18   | 15   | -    | 21   | 19   | 15   | -    | 20   | 18   | 15   | -     | 20   | 18   | 15   | 0     | 21   | 19   | 16   | - |
|      |         | KW                          | 1.76 | 1.76 | 1.76 | -    | 1.96 | 1.96 | 1.95 | -    | 2.18 | 2.18 | 2.17 | -    | 2.41 | 2.41 | 2.41 | -     | 2.68 | 2.68 | 2.67 | 0.0   | 2.99 | 2.99 | 2.98 | - |
|      |         | Amps                        | 6.0  | 6.0  | 6.0  | -    | 6.8  | 6.8  | 6.8  | -    | 7.8  | 7.8  | 7.8  | -    | 8.8  | 8.8  | 8.8  | -     | 10.0 | 10.0 | 9.9  | 0.0   | 11.3 | 11.3 | 11.3 | - |
|      | 1045    | Hi PR                       | 227  | 228  | 229  | -    | 263  | 264  | 265  | -    | 300  | 301  | 303  | -    | 340  | 341  | 343  | -     | 384  | 385  | 386  | 0.0   | 430  | 431  | 433  | - |
|      |         | Lo PR                       | 122  | 123  | 126  | -    | 129  | 131  | 134  | -    | 136  | 137  | 140  | -    | 141  | 143  | 146  | -     | 147  | 148  | 151  | 0.0   | 153  | 155  | 158  | - |
|      |         | MBh                         | 34.8 | 35.3 | 36.3 | -    | 34.5 | 35.0 | 36.0 | -    | 33.6 | 34.1 | 35.1 | -    | 32.1 | 32.6 | 33.6 | -     | 30.2 | 30.7 | 31.7 | 0.0   | 28.5 | 29.0 | 30.0 | - |
|      |         | S/T                         | 0.64 | 0.57 | 0.44 | -    | 0.65 | 0.57 | 0.44 | -    | 0.67 | 0.60 | 0.47 | -    | 0.69 | 0.62 | 0.49 | -     | 1.00 | 0.64 | 0.51 | 0.0   | 1.00 | 0.69 | 0.56 | - |
|      |         | ΔT                          | 19   | 18   | 14   | -    | 19   | 18   | 14   | -    | 20   | 18   | 14   | -    | 19   | 17   | 14   | -     | 19   | 17   | 14   | 0     | 20   | 18   | 15   | - |
| 1150 | KW      | 1.77                        | 1.77 | 1.77 | -    | 1.97 | 1.97 | 1.96 | -    | 2.19 | 2.18 | 2.18 | -    | 2.42 | 2.42 | 2.42 | -    | 2.69  | 2.69 | 2.68 | 0.00 | 3.00  | 3.00 | 2.99 | -    |   |
|      | Amps    | 6.0                         | 6.0  | 6.0  | -    | 6.9  | 6.9  | 6.8  | -    | 7.8  | 7.8  | 7.8  | -    | 8.8  | 8.8  | 8.8  | -    | 10.0  | 10.0 | 10.0 | 0.0  | 11.3  | 11.3 | 11.3 | -    |   |
|      | Hi PR   | 228                         | 229  | 231  | -    | 264  | 265  | 267  | -    | 302  | 303  | 304  | -    | 342  | 343  | 344  | -    | 385   | 386  | 388  | 0.0  | 432   | 433  | 434  | -    |   |
|      | Lo PR   | 123                         | 125  | 128  | -    | 131  | 132  | 135  | -    | 137  | 139  | 142  | -    | 143  | 144  | 147  | -    | 148   | 150  | 153  | 0.0  | 155   | 156  | 159  | -    |   |
|      | MBh     | 35.3                        | 35.7 | 36.8 | -    | 35.0 | 35.4 | 36.5 | -    | 34.1 | 34.5 | 35.6 | -    | 32.5 | 33.0 | 34.0 | -    | 30.6  | 31.1 | 32.1 | 0.0  | 28.9  | 29.4 | 30.4 | -    |   |

| IDB  | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |
|------|---------|-----------------------------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
|      |         | 65°F                        |      |      |       | 75°F  |      |      |       | 85°F  |      |      |       | 95°F  |      |      |       | 105°F |      |      |       | 115°F |      |      |       |       |
|      |         | 59                          | 63   | 67   | 71    | 59    | 63   | 67   | 71    | 59    | 63   | 67   | 71    | 59    | 63   | 67   | 71    | 59    | 63   | 67   | 71    | 59    | 63   | 67   | 71    |       |
| 75   | 940     | MBh                         | 34.5 | 35.0 | 36.0  | 37.6  | 34.2 | 34.7 | 35.7  | 37.3  | 33.3 | 33.8 | 34.8  | 36.4  | 31.7 | 32.2 | 33.2  | 34.8  | 29.8 | 30.3 | 31.4  | 32.9  | 28.1 | 28.6 | 29.6  | 31.2  |
|      |         | S/T                         | 0.72 | 0.65 | 0.52  | 0.4   | 0.73 | 0.65 | 0.52  | 0.4   | 1.00 | 0.68 | 0.55  | 0.4   | 1.00 | 0.70 | 0.56  | 0.4   | 1.00 | 0.72 | 0.59  | 0.4   | 1.00 | 1.00 | 0.64  | 0.5   |
|      |         | ΔT                          | 25   | 23   | 19    | 15    | 25   | 23   | 19    | 15    | 25   | 23   | 19    | 16    | 24   | 23   | 19    | 15    | 24   | 22   | 19    | 15    | 25   | 24   | 20    | 16    |
|      |         | KW                          | 1.76 | 1.76 | 1.76  | 1.8   | 1.96 | 1.96 | 1.95  | 2.0   | 2.18 | 2.18 | 2.17  | 2.2   | 2.41 | 2.41 | 2.41  | 2.4   | 2.68 | 2.68 | 2.67  | 2.7   | 2.99 | 2.99 | 2.98  | 3.0   |
|      |         | Amps                        | 6.0  | 6.0  | 5.9   | 6.0   | 6.8  | 6.8  | 6.8   | 6.9   | 7.8  | 7.8  | 7.8   | 7.8   | 8.8  | 8.8  | 8.8   | 8.8   | 10.0 | 9.9  | 9.9   | 10.0  | 11.3 | 11.3 | 11.3  | 11.3  |
|      | 1045    | Hi PR                       | 227  | 228  | 230   | 233.6 | 263  | 264  | 265   | 269.3 | 300  | 301  | 303   | 306.7 | 341  | 342  | 343   | 347.0 | 384  | 385  | 387   | 390.5 | 430  | 431  | 433   | 436.9 |
|      |         | Lo PR                       | 122  | 123  | 126   | 131.6 | 129  | 131  | 134   | 139.0 | 136  | 137  | 140   | 145.5 | 141  | 143  | 146   | 151.0 | 147  | 148  | 151   | 156.4 | 153  | 155  | 158   | 163.1 |
|      |         | MBh                         | 34.9 | 35.3 | 36.4  | 37.9  | 34.5 | 35.0 | 36.1  | 37.6  | 33.6 | 34.1 | 35.2  | 36.7  | 32.1 | 32.6 | 33.6  | 35.2  | 30.2 | 30.7 | 31.7  | 33.3  | 28.5 | 29.0 | 30.0  | 31.6  |
|      |         | S/T                         | 0.76 | 0.69 | 0.56  | 0.4   | 0.77 | 0.70 | 0.57  | 0.4   | 1.00 | 0.72 | 0.59  | 0.5   | 1.00 | 0.74 | 0.61  | 0.5   | 1.00 | 0.76 | 0.63  | 0.5   | 1.00 | 1.00 | 0.68  | 0.5   |
|      |         | ΔT                          | 24   | 22   | 18    | 15    | 24   | 22   | 18    | 14    | 24   | 22   | 18    | 15    | 24   | 22   | 18    | 14    | 23   | 21   | 18    | 14    | 25   | 23   | 19    | 15    |
| 1150 | KW      | 1.77                        | 1.77 | 1.76 | 1.78  | 1.97  | 1.96 | 1.96 | 1.98  | 2.18  | 2.18 | 2.18 | 2.19  | 2.42  | 2.42 | 2.42 | 2.43  | 2.69  | 2.68 | 2.68 | 2.70  | 3.00  | 2.99 | 2.99 | 3.01  |       |
|      | Amps    | 6.0                         | 6.0  | 6.0  | 6.0   | 6.9   | 6.9  | 6.8  | 6.9   | 7.8   | 7.8  | 7.8  | 7.9   | 8.8   | 8.8  | 8.8  | 8.9   | 10.0  | 10.0 | 10.0 | 10.0  | 11.3  | 11.3 | 11.3 | 11.4  |       |
|      | Hi PR   | 229                         | 230  | 231  | 235.1 | 264   | 265  | 267  | 270.8 | 302   | 303  | 304  | 308.3 | 342   | 343  | 345  | 348.6 | 386   | 387  | 388  | 392.0 | 432   | 433  | 434  | 438.4 |       |
|      | Lo PR   | 123                         | 125  | 128  | 133.1 | 131   | 132  | 135  | 140.5 | 137   | 139  | 142  | 147.0 | 143   | 144  | 147  | 152.4 | 148   | 150  | 153  | 157.8 | 155   | 156  | 159  | 164.5 |       |
|      | MBh     | 35.3                        | 35.8 | 36.8 | 38.4  | 35.0  | 35.5 | 36.5 | 38.1  | 34.1  | 34.6 | 35.6 | 37.2  | 32.5  | 33.0 | 34.0 | 35.6  | 30.6  | 31.1 | 32.2 | 33.7  | 28.9  | 29.4 | 30.4 | 32.0  |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — GSXC704810A\* +CA\*T4961\*4A\* +EEP - LOW STAGE (CONT.)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |       |      |       |       |       |      |       |       |      |      |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|------|------|
|       |         | 65°F                        |      |       |       | 75°F |      |       |       | 85°F |      |       |       | 95°F |      |       |       | 105°F |      |       |       | 115°F |      |       |       |      |      |
|       |         | 59                          | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59    | 63   | 67    | 71    | 59    | 63   | 67    | 71    |      |      |
| 80    | 940     | MBh                         | 34.7 | 35.1  | 36.2  | 37.7 | 34.4 | 34.8  | 35.9  | 37.4 | 33.5 | 33.9  | 35.0  | 36.5 | 31.9 | 32.4  | 33.4  | 35.0  | 30.0 | 30.5  | 31.5  | 33.1  | 28.3 | 28.8  | 29.8  | 31.4 |      |
|       |         | S/T                         | 0.84 | 0.77  | 0.64  | 0.5  | 1.00 | 0.77  | 0.64  | 0.5  | 1.00 | 0.80  | 0.67  | 0.5  | 1.00 | 0.82  | 0.69  | 0.5   | 1.00 | 1.00  | 1.00  | 0.71  | 0.6  | 1.00  | 1.00  | 0.76 | 0.6  |
|       |         | ΔT                          | 29   | 27    | 23    | 20   | 29   | 27    | 23    | 20   | 29   | 27    | 24    | 20   | 29   | 27    | 23    | 20    | 28   | 27    | 23    | 19    | 30   | 28    | 24    | 21   |      |
|       |         | KW                          | 1.76 | 1.76  | 1.76  | 1.8  | 1.96 | 1.96  | 1.95  | 2.0  | 2.18 | 2.18  | 2.17  | 2.2  | 2.41 | 2.41  | 2.41  | 2.4   | 2.68 | 2.68  | 2.68  | 2.67  | 2.7  | 2.99  | 2.99  | 2.98 | 3.0  |
|       |         | Amps                        | 6.0  | 6.0   | 6.0   | 6.0  | 6.8  | 6.8   | 6.8   | 6.9  | 7.8  | 7.8   | 7.8   | 7.8  | 8.8  | 8.8   | 8.8   | 8.9   | 10.0 | 10.0  | 10.0  | 9.9   | 10.0 | 11.3  | 11.3  | 11.3 | 11.4 |
|       | Hi PR   | 227                         | 228  | 230   | 234.0 | 263  | 264  | 266   | 269.7 | 301  | 302  | 303   | 307.2 | 341  | 342  | 344   | 347.5 | 384   | 385  | 387   | 390.9 | 431   | 432  | 433   | 437.3 |      |      |
|       | Lo PR   | 122                         | 124  | 127   | 132.2 | 130  | 131  | 134   | 139.6 | 136  | 138  | 141   | 146.1 | 142  | 143  | 146   | 151.5 | 147   | 149  | 152   | 156.9 | 154   | 155  | 158   | 163.6 |      |      |
|       | MBh     | 35.0                        | 35.5 | 36.5  | 38.1  | 34.7 | 35.2 | 36.2  | 37.8  | 33.8 | 34.3 | 35.3  | 36.9  | 32.3 | 32.8 | 33.8  | 35.4  | 30.4  | 30.9 | 31.9  | 33.5  | 28.7  | 29.2 | 30.2  | 31.8  |      |      |
|       | S/T     | 1.00                        | 0.81 | 0.68  | 0.5   | 1.00 | 0.82 | 0.69  | 0.5   | 1.00 | 0.84 | 0.71  | 0.6   | 1.00 | 0.86 | 0.73  | 0.6   | 1.00  | 1.00 | 1.00  | 0.75  | 0.6   | 1.00 | 1.00  | 0.80  | 0.7  |      |
|       | ΔT      | 28                          | 26   | 22    | 19    | 28   | 26   | 22    | 19    | 28   | 26   | 23    | 19    | 28   | 26   | 22    | 19    | 28    | 26   | 22    | 18    | 29    | 27   | 23    | 20    |      |      |
| KW    | 1.77    | 1.77                        | 1.77 | 1.78  | 1.97  | 1.97 | 1.96 | 1.98  | 2.19  | 2.18 | 2.18 | 2.20  | 2.42  | 2.42 | 2.42 | 2.43  | 2.69  | 2.69  | 2.68 | 2.70  | 3.00  | 3.00  | 2.99 | 3.01  |       |      |      |
| Amps  | 6.0     | 6.0                         | 6.0  | 6.1   | 6.9   | 6.9  | 6.8  | 6.9   | 7.8   | 7.8  | 7.8  | 7.9   | 8.8   | 8.8  | 8.8  | 8.9   | 10.0  | 10.0  | 10.0 | 10.0  | 11.3  | 11.3  | 11.3 | 11.4  |       |      |      |
| Hi PR | 229     | 230                         | 232  | 235.5 | 265   | 266  | 267  | 271.3 | 302   | 303  | 305  | 308.7 | 342   | 343  | 345  | 349.0 | 386   | 387   | 389  | 392.5 | 432   | 433   | 435  | 438.8 |       |      |      |
| Lo PR | 124     | 125                         | 128  | 133.6 | 131   | 133  | 136  | 141.0 | 138   | 139  | 142  | 147.5 | 143   | 145  | 148  | 153.0 | 149   | 150   | 153  | 158.3 | 155   | 157   | 160  | 165.1 |       |      |      |
| MBh   | 35.5    | 35.9                        | 37.0 | 38.5  | 35.2  | 35.6 | 36.7 | 38.2  | 34.3  | 34.7 | 35.8 | 37.3  | 32.7  | 33.2 | 34.2 | 35.8  | 30.8  | 31.3  | 32.3 | 33.9  | 29.1  | 29.6  | 30.6 | 32.2  |       |      |      |
| S/T   | 1.00    | 0.84                        | 0.71 | 0.6   | 1.00  | 0.84 | 0.71 | 0.6   | 1.00  | 0.87 | 0.74 | 0.6   | 1.00  | 1.00 | 0.76 | 0.6   | 1.00  | 1.00  | 1.00 | 0.78  | 0.6   | 1.00  | 1.00 | 0.83  | 0.7   |      |      |
| ΔT    | 27      | 25                          | 22   | 18    | 27    | 25   | 22   | 18    | 27    | 25   | 22   | 18    | 27    | 25   | 22   | 18    | 27    | 25    | 21   | 18    | 28    | 26    | 22   | 19    |       |      |      |
| KW    | 1.78    | 1.78                        | 1.77 | 1.8   | 1.97  | 1.97 | 1.97 | 2.0   | 2.19  | 2.19 | 2.19 | 2.2   | 2.43  | 2.43 | 2.42 | 2.4   | 2.69  | 2.69  | 2.69 | 2.7   | 3.00  | 3.00  | 3.00 | 3.0   |       |      |      |
| Amps  | 6.0     | 6.0                         | 6.0  | 6.1   | 6.9   | 6.9  | 6.9  | 6.9   | 7.8   | 7.8  | 7.8  | 7.9   | 8.9   | 8.9  | 8.9  | 8.9   | 10.0  | 10.0  | 10.0 | 10.0  | 11.4  | 11.4  | 11.4 | 11.4  |       |      |      |
| Hi PR | 230     | 231                         | 233  | 237.0 | 266   | 267  | 269  | 272.8 | 304   | 305  | 306  | 310.2 | 344   | 345  | 347  | 350.5 | 387   | 388   | 390  | 394.0 | 434   | 435   | 436  | 440.3 |       |      |      |
| Lo PR | 125     | 127                         | 130  | 135.2 | 133   | 134  | 137  | 142.6 | 139   | 141  | 144  | 149.1 | 145   | 146  | 149  | 154.5 | 150   | 152   | 155  | 159.9 | 157   | 158   | 161  | 166.6 |       |      |      |

|       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |     |
|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|-----|
| 85    | 940   | MBh  | 35.2 | 35.7  | 36.8  | 38.3 | 34.9 | 35.4  | 36.4  | 38.0 | 34.0 | 34.5  | 35.5  | 37.1 | 32.5 | 33.0  | 34.0  | 35.6 | 30.6 | 31.1  | 32.1  | 33.7 | 28.9 | 29.4  | 30.4  | 32.0 |     |
|       |       | S/T  | 1.00 | 0.86  | 0.73  | 0.6  | 1.00 | 0.87  | 0.74  | 0.6  | 1.00 | 0.91  | 0.78  | 0.6  | 1.00 | 1.00  | 0.78  | 0.6  | 1.00 | 1.00  | 1.00  | 0.80 | 0.7  | 1.00  | 1.00  | 1.00 | 0.7 |
|       |       | ΔT   | 33   | 31    | 27    | 23   | 32   | 31    | 27    | 23   | 32   | 30    | 26    | 23   | 32   | 30    | 26    | 22   | 31   | 29    | 26    | 22   | 32   | 31    | 27    | 23   | 24  |
|       |       | KW   | 1.77 | 1.77  | 1.76  | 1.8  | 1.96 | 1.96  | 1.96  | 2.0  | 2.18 | 2.18  | 2.18  | 2.2  | 2.42 | 2.42  | 2.41  | 2.4  | 2.68 | 2.68  | 2.68  | 2.7  | 2.99 | 2.99  | 2.99  | 3.0  |     |
|       |       | Amps | 6.0  | 6.0   | 6.0   | 6.0  | 6.8  | 6.8   | 6.8   | 6.9  | 7.8  | 7.8   | 7.8   | 7.8  | 8.8  | 8.8   | 8.8   | 8.9  | 10.0 | 10.0  | 10.0  | 10.0 | 11.3 | 11.3  | 11.3  | 11.4 |     |
|       | Hi PR | 229  | 230  | 231   | 235.0 | 264  | 265  | 267   | 270.8 | 302  | 303  | 304   | 308.2 | 342  | 343  | 345   | 348.5 | 385  | 386  | 388   | 392.0 | 432  | 433  | 434   | 438.4 |      |     |
|       | Lo PR | 124  | 126  | 129   | 134.0 | 132  | 133  | 136   | 141.4 | 138  | 140  | 143   | 147.9 | 144  | 145  | 148   | 153.3 | 149  | 150  | 154   | 158.7 | 156  | 157  | 160   | 165.4 |      |     |
|       | MBh   | 35.6 | 36.1 | 37.1  | 38.7  | 35.3 | 35.8 | 36.8  | 38.4  | 34.4 | 34.9 | 35.9  | 37.5  | 32.9 | 33.3 | 34.4  | 35.9  | 31.0 | 31.5 | 32.5  | 34.1  | 29.2 | 29.7 | 30.8  | 32.3  |      |     |
|       | S/T   | 1.00 | 0.91 | 0.78  | 0.6   | 1.00 | 0.91 | 0.78  | 0.6   | 1.00 | 1.00 | 0.81  | 0.7   | 1.00 | 1.00 | 0.83  | 0.7   | 1.00 | 1.00 | 1.00  | 0.85  | 0.7  | 1.00 | 1.00  | 1.00  | 0.8  |     |
|       | ΔT    | 32   | 30   | 26    | 22    | 32   | 30   | 26    | 22    | 32   | 30   | 26    | 23    | 32   | 30   | 26    | 22    | 31   | 29   | 26    | 22    | 32   | 31   | 27    | 23    | 23   |     |
| KW    | 1.77  | 1.77 | 1.77 | 1.78  | 1.97  | 1.97 | 1.97 | 1.98  | 2.19  | 2.19 | 2.18 | 2.20  | 2.43  | 2.42 | 2.42 | 2.44  | 2.69  | 2.69 | 2.69 | 2.70  | 3.00  | 3.00 | 3.00 | 3.01  |       |      |     |
| Amps  | 6.0   | 6.0  | 6.0  | 6.1   | 6.9   | 6.9  | 6.9  | 6.9   | 7.8   | 7.8  | 7.8  | 7.9   | 8.9   | 8.9  | 8.8  | 8.9   | 10.0  | 10.0 | 10.0 | 10.1  | 11.4  | 11.4 | 11.3 | 11.4  |       |      |     |
| Hi PR | 230   | 231  | 233  | 236.6 | 266   | 267  | 268  | 272.3 | 303   | 304  | 306  | 309.8 | 344   | 345  | 346  | 350.1 | 387   | 388  | 390  | 393.5 | 433   | 434  | 436  | 439.9 |       |      |     |
| Lo PR | 126   | 127  | 130  | 135.5 | 133   | 135  | 138  | 142.8 | 140   | 141  | 144  | 149.3 | 145   | 147  | 150  | 154.8 | 150   | 152  | 155  | 160.2 | 157   | 159  | 162  | 166.9 |       |      |     |
| MBh   | 36.0  | 36.5 | 37.6 | 39.1  | 35.7  | 36.2 | 37.2 | 38.8  | 34.8  | 35.3 | 36.3 | 37.9  | 33.3  | 33.8 | 34.8 | 36.4  | 31.4  | 31.9 | 32.9 | 34.5  | 29.7  | 30.2 | 31.2 | 32.8  |       |      |     |
| S/T   | 1.00  | 0.94 | 0.81 | 0.7   | 1.00  | 1.00 | 0.81 | 0.7   | 1.00  | 1.00 | 0.84 | 0.7   | 1.00  | 1.00 | 0.85 | 0.7   | 1.00  | 1.00 | 1.00 | 0.88  | 0.7   | 1.00 | 1.00 | 1.00  | 0.8   |      |     |
| ΔT    | 31    | 29   | 25   | 22    | 31    | 29   | 25   | 22    | 31    | 29   | 26   | 22    | 31    | 29   | 25   | 22    | 31    | 29   | 25   | 21    | 32    | 30   | 26   | 23    | 23    |      |     |
| KW    | 1.78  | 1.78 | 1.78 | 1.8   | 1.98  | 1.98 | 1.97 | 2.0   | 2.20  | 2.19 | 2.19 | 2.2   | 2.43  | 2.43 | 2.43 | 2.4   | 2.70  | 2.70 | 2.69 | 2.7   | 3.01  | 3.01 | 3.00 | 3.0   |       |      |     |
| Amps  | 6.1   | 6.0  | 6.0  | 6.1   | 6.9   | 6.9  | 6.9  | 7.0   | 7.9   | 7.9  | 7.8  | 7.9   | 8.9   | 8.9  | 8.9  | 8.9   | 10.0  | 10.0 | 10.0 | 10.1  | 11.4  | 11.4 | 11.4 | 11.4  |       |      |     |
| Hi PR | 232   | 233  | 234  | 238.1 | 267   | 268  | 270  | 273.8 | 305   | 306  | 307  | 311.3 | 345   | 346  | 348  | 351.6 | 389   | 389  | 391  | 395.0 | 435   | 436  | 437  | 441.4 |       |      |     |
| Lo PR | 127   | 129  | 132  | 137.0 | 135   | 136  | 139  | 144.4 | 141   | 143  | 146  | 150.9 | 147   | 148  | 151  | 156.4 | 152   | 153  | 157  | 161.7 | 159   | 160  | 163  | 168.5 |       |      |     |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB  | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |       |      |      |      |       |      |      |      |   |
|------|---------|-----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|------|------|------|-------|------|------|------|---|
|      |         | 65°F                        |      |      |      | 75°F |      |      |      | 85°F |      |      |      | 95°F |      |      |      | 105°F |      |      |      | 115°F |      |      |      |   |
|      |         | 59                          | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59   | 63   | 67   | 71   | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71   |   |
| 70   | 1460    | MBh                         | 57.7 | 58.5 | 60.2 | -    | 57.2 | 58.0 | 59.7 | -    | 55.7 | 56.5 | 58.2 | -    | 53.2 | 54.0 | 55.7 | -     | 50.0 | 50.8 | 52.5 | -     | 47.2 | 48.0 | 49.7 | - |
|      |         | S/T                         | 0.61 | 0.54 | 0.41 | -    | 0.61 | 0.54 | 0.42 | -    | 0.63 | 0.56 | 0.44 | -    | 0.65 | 0.58 | 0.46 | -     | 0.67 | 0.60 | 0.48 | -     | 0.72 | 0.65 | 0.53 | - |
|      |         | ΔT                          | 22   | 20   | 16   | -    | 22   | 20   | 16   | -    | 22   | 20   | 16   | -    | 22   | 20   | 16   | -     | 22   | 20   | 16   | -     | 23   | 21   | 17   | - |
|      |         | KW                          | 3.32 | 3.32 | 3.31 | -    | 3.71 | 3.71 | 3.70 | -    | 4.15 | 4.15 | 4.14 | -    | 4.63 | 4.63 | 4.62 | -     | 5.16 | 5.16 | 5.15 | -     | 5.79 | 5.78 | 5.78 | - |
|      |         | Amps                        | 11.6 | 11.6 | 11.6 | -    | 13.4 | 13.3 | 13.3 | -    | 15.3 | 15.3 | 15.2 | -    | 17.3 | 17.3 | 17.3 | -     | 19.6 | 19.6 | 19.6 | -     | 22.4 | 22.3 | 22.3 | - |
|      | 1680    | Hi PR                       | 248  | 249  | 251  | -    | 287  | 288  | 290  | -    | 328  | 329  | 331  | -    | 372  | 373  | 374  | -     | 419  | 420  | 422  | -     | 469  | 470  | 472  | - |
|      |         | Lo PR                       | 112  | 114  | 116  | -    | 119  | 120  | 123  | -    | 125  | 126  | 129  | -    | 130  | 131  | 134  | -     | 135  | 136  | 139  | -     | 141  | 142  | 145  | - |
|      |         | MBh                         | 58.8 | 59.6 | 61.3 | -    | 58.3 | 59.1 | 60.8 | -    | 56.8 | 57.6 | 59.3 | -    | 54.3 | 55.1 | 56.8 | -     | 51.1 | 51.9 | 53.6 | -     | 48.3 | 49.1 | 50.8 | - |
|      |         | S/T                         | 0.64 | 0.57 | 0.45 | -    | 0.65 | 0.58 | 0.45 | -    | 0.67 | 0.60 | 0.48 | -    | 0.69 | 0.62 | 0.49 | -     | 0.71 | 0.64 | 0.51 | -     | 0.75 | 0.68 | 0.56 | - |
|      |         | ΔT                          | 21   | 19   | 15   | -    | 21   | 19   | 15   | -    | 21   | 19   | 15   | -    | 21   | 19   | 15   | -     | 21   | 18   | 14   | -     | 22   | 20   | 16   | - |
| 1900 | KW      | 3.34                        | 3.34 | 3.33 | -    | 3.74 | 3.73 | 3.73 | -    | 4.18 | 4.17 | 4.17 | -    | 4.65 | 4.65 | 4.64 | -    | 5.18  | 5.18 | 5.17 | -    | 5.81  | 5.80 | 5.80 | -    |   |
|      | Amps    | 11.7                        | 11.7 | 11.7 | -    | 13.4 | 13.4 | 13.4 | -    | 15.4 | 15.3 | 15.3 | -    | 17.4 | 17.4 | 17.4 | -    | 19.7  | 19.7 | 19.7 | -    | 22.5  | 22.4 | 22.4 | -    |   |
|      | Hi PR   | 251                         | 252  | 254  | -    | 290  | 291  | 292  | -    | 330  | 331  | 333  | -    | 374  | 375  | 377  | -    | 421   | 422  | 424  | -    | 472   | 473  | 475  | -    |   |
|      | Lo PR   | 114                         | 116  | 119  | -    | 121  | 123  | 125  | -    | 127  | 128  | 131  | -    | 132  | 133  | 136  | -    | 137   | 138  | 141  | -    | 143   | 144  | 147  | -    |   |
|      | MBh     | 60.2                        | 61.0 | 62.7 | -    | 59.7 | 60.5 | 62.2 | -    | 58.2 | 59.0 | 60.7 | -    | 55.6 | 56.5 | 58.2 | -    | 52.5  | 53.3 | 55.0 | -    | 49.7  | 50.5 | 52.2 | -    |   |

|      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |
|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| 75   | 1460  | MBh   | 57.8 | 58.6 | 60.3  | 62.9  | 57.2 | 58.0 | 59.8  | 62.4  | 55.8 | 56.6 | 58.3  | 60.9  | 53.2 | 54.0 | 55.7  | 58.3  | 50.1 | 50.9 | 52.6  | 55.2  | 47.2 | 48.0 | 49.7  | 52.3  |
|      |       | S/T   | 0.72 | 0.65 | 0.53  | 0.4   | 0.73 | 0.66 | 0.54  | 0.4   | 0.75 | 0.68 | 0.56  | 0.4   | 0.77 | 0.70 | 0.58  | 0.4   | 1.00 | 0.72 | 0.60  | 0.5   | 1.00 | 0.77 | 0.64  | 0.5   |
|      |       | ΔT    | 27   | 25   | 21    | 17    | 27   | 25   | 21    | 17    | 27   | 25   | 21    | 17    | 27   | 25   | 21    | 16    | 27   | 24   | 20    | 16    | 28   | 26   | 22    | 18    |
|      |       | KW    | 3.32 | 3.31 | 3.31  | 3.3   | 3.71 | 3.71 | 3.70  | 3.7   | 4.15 | 4.15 | 4.14  | 4.2   | 4.63 | 4.63 | 4.62  | 4.6   | 5.16 | 5.16 | 5.15  | 5.2   | 5.78 | 5.78 | 5.77  | 5.8   |
|      |       | Amps  | 11.6 | 11.6 | 11.6  | 11.7  | 13.3 | 13.3 | 13.3  | 13.4  | 15.3 | 15.2 | 15.2  | 15.3  | 17.3 | 17.3 | 17.3  | 17.4  | 19.6 | 19.6 | 19.6  | 19.7  | 22.4 | 22.3 | 22.3  | 22.4  |
|      | 1680  | Hi PR | 248  | 250  | 251   | 255.6 | 287  | 288  | 290   | 294.4 | 328  | 329  | 331   | 335.1 | 372  | 373  | 375   | 378.9 | 419  | 420  | 422   | 426.2 | 469  | 471  | 472   | 476.6 |
|      |       | Lo PR | 112  | 114  | 116   | 121.2 | 119  | 120  | 123   | 127.9 | 125  | 126  | 129   | 133.8 | 130  | 131  | 134   | 138.8 | 135  | 136  | 139   | 143.7 | 141  | 142  | 145   | 149.8 |
|      |       | MBh   | 58.9 | 59.7 | 61.4  | 64.0  | 58.4 | 59.2 | 60.9  | 63.5  | 56.9 | 57.7 | 59.4  | 62.0  | 54.3 | 55.1 | 56.8  | 59.4  | 51.2 | 52.0 | 53.7  | 56.3  | 48.3 | 49.1 | 50.8  | 53.4  |
|      |       | S/T   | 0.76 | 0.69 | 0.56  | 0.4   | 0.76 | 0.69 | 0.57  | 0.4   | 0.79 | 0.72 | 0.59  | 0.5   | 0.80 | 0.73 | 0.61  | 0.5   | 1.00 | 0.75 | 0.63  | 0.5   | 1.00 | 0.80 | 0.68  | 0.5   |
|      |       | ΔT    | 26   | 24   | 19    | 15    | 26   | 23   | 19    | 15    | 26   | 24   | 20    | 15    | 26   | 23   | 19    | 15    | 25   | 23   | 19    | 15    | 27   | 25   | 20    | 16    |
| 1900 | KW    | 3.34  | 3.34 | 3.33 | 3.36  | 3.73  | 3.73 | 3.72 | 3.75  | 4.17  | 4.17 | 4.16 | 4.19  | 4.65  | 4.65 | 4.64 | 4.67  | 5.18  | 5.18 | 5.17 | 5.20  | 5.81  | 5.80 | 5.80 | 5.83  |       |
|      | Amps  | 11.7  | 11.7 | 11.7 | 11.8  | 13.4  | 13.4 | 13.4 | 13.5  | 15.3  | 15.3 | 15.3 | 15.4  | 17.4  | 17.4 | 17.4 | 17.5  | 19.7  | 19.7 | 19.7 | 19.8  | 22.4  | 22.4 | 22.4 | 22.5  |       |
|      | Hi PR | 251   | 252  | 254  | 258.0 | 290   | 291  | 293  | 296.9 | 330   | 332  | 333  | 337.6 | 374   | 375  | 377  | 381.4 | 422   | 423  | 424  | 428.6 | 472   | 473  | 475  | 479.0 |       |
|      | Lo PR | 114   | 116  | 119  | 123.4 | 121   | 123  | 125  | 130.1 | 127   | 128  | 131  | 136.0 | 132   | 133  | 136  | 141.0 | 137   | 138  | 141  | 145.9 | 143   | 144  | 147  | 152.0 |       |
|      | MBh   | 60.2  | 61.0 | 62.7 | 65.3  | 59.7  | 60.5 | 62.2 | 64.8  | 58.2  | 59.0 | 60.7 | 63.3  | 55.7  | 56.5 | 58.2 | 60.8  | 52.6  | 53.4 | 55.1 | 57.7  | 49.7  | 50.5 | 52.2 | 54.8  |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



EXPANDED COOLING DATA – GSXC706010A\* +CA\*T4961\*4A\* +EEP - HIGH STAGE (CONT.)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |       |      |       |       |       |      |       |       |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|
|       |         | 65°F                        |      |       |       | 75°F |      |       |       | 85°F |      |       |       | 95°F |      |       |       | 105°F |      |       |       | 115°F |      |       |       |
|       |         | 59                          | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59    | 63   | 67    | 71    | 59    | 63   | 67    | 71    |
| 80    | MBh     | 58.1                        | 58.9 | 60.6  | 63.2  | 57.5 | 58.3 | 60.0  | 62.6  | 56.1 | 56.9 | 58.6  | 61.2  | 53.5 | 54.3 | 56.0  | 58.6  | 50.4  | 51.2 | 52.9  | 55.5  | 47.5  | 48.3 | 50.0  | 52.6  |
|       | S/T     | 0.84                        | 0.77 | 0.64  | 0.5   | 0.84 | 0.77 | 0.65  | 0.5   | 1.00 | 0.80 | 0.67  | 0.5   | 1.00 | 0.81 | 0.69  | 0.6   | 1.00  | 0.83 | 0.71  | 0.6   | 1.00  | 0.88 | 0.76  | 0.6   |
|       | ΔT      | 32                          | 30   | 26    | 21    | 32   | 30   | 26    | 21    | 32   | 30   | 26    | 22    | 32   | 30   | 26    | 21    | 31    | 29   | 25    | 21    | 33    | 31   | 27    | 22    |
|       | KW      | 3.32                        | 3.32 | 3.31  | 3.3   | 3.71 | 3.71 | 3.70  | 3.7   | 4.15 | 4.15 | 4.14  | 4.2   | 4.63 | 4.63 | 4.62  | 4.7   | 5.16  | 5.16 | 5.15  | 5.2   | 5.79  | 5.78 | 5.78  | 5.8   |
|       | Amps    | 11.6                        | 11.6 | 11.6  | 11.7  | 13.4 | 13.3 | 13.3  | 13.4  | 15.3 | 15.2 | 15.2  | 15.4  | 17.3 | 17.3 | 17.3  | 17.4  | 19.6  | 19.6 | 19.6  | 19.7  | 22.4  | 22.3 | 22.3  | 22.4  |
|       | Hi PR   | 249                         | 250  | 252   | 256.0 | 288  | 289  | 291   | 294.9 | 328  | 330  | 331   | 335.6 | 372  | 373  | 375   | 379.4 | 420   | 421  | 422   | 426.6 | 470   | 471  | 473   | 477.0 |
|       | Lo PR   | 113                         | 114  | 117   | 121.7 | 120  | 121  | 124   | 128.4 | 125  | 127  | 130   | 134.3 | 130  | 132  | 135   | 139.3 | 135   | 137  | 139   | 144.2 | 141   | 143  | 146   | 150.3 |
|       | MBh     | 59.2                        | 60.0 | 61.7  | 64.3  | 58.6 | 59.5 | 61.2  | 63.8  | 57.2 | 58.0 | 59.7  | 62.3  | 54.6 | 55.4 | 57.1  | 59.7  | 51.5  | 52.3 | 54.0  | 56.6  | 48.6  | 49.4 | 51.1  | 53.7  |
|       | S/T     | 0.87                        | 0.80 | 0.68  | 0.5   | 0.88 | 0.81 | 0.68  | 0.6   | 1.00 | 0.83 | 0.71  | 0.6   | 1.00 | 0.85 | 0.72  | 0.6   | 1.00  | 0.87 | 0.74  | 0.6   | 1.00  | 0.91 | 0.79  | 0.7   |
|       | ΔT      | 31                          | 28   | 24    | 20    | 30   | 28   | 24    | 20    | 31   | 29   | 25    | 20    | 30   | 28   | 24    | 20    | 30    | 28   | 24    | 20    | 32    | 29   | 25    | 21    |
| KW    | 3.34    | 3.34                        | 3.33 | 3.36  | 3.73  | 3.73 | 3.72 | 3.75  | 4.17  | 4.17 | 4.16 | 4.20  | 4.65  | 4.65 | 4.64 | 4.67  | 5.18  | 5.18  | 5.17 | 5.20  | 5.81  | 5.80  | 5.80 | 5.83  |       |
| Amps  | 11.7    | 11.7                        | 11.7 | 11.8  | 13.4  | 13.4 | 13.4 | 13.5  | 15.4  | 15.3 | 15.3 | 15.4  | 17.4  | 17.4 | 17.4 | 17.5  | 19.7  | 19.7  | 19.7 | 19.8  | 22.4  | 22.4  | 22.4 | 22.5  |       |
| Hi PR | 251     | 252                         | 254  | 258.5 | 290   | 291  | 293  | 297.3 | 331   | 332  | 334  | 338.0 | 375   | 376  | 378  | 381.8 | 422   | 423   | 425  | 429.1 | 472   | 473   | 475  | 479.5 |       |
| Lo PR | 115     | 116                         | 119  | 123.9 | 122   | 123  | 126  | 130.6 | 128   | 129  | 132  | 136.5 | 133   | 134  | 137  | 141.5 | 137   | 139   | 142  | 146.4 | 144   | 145   | 148  | 152.5 |       |
| MBh   | 60.5    | 61.3                        | 63.0 | 65.6  | 60.0  | 60.8 | 62.5 | 65.1  | 58.5  | 59.3 | 61.0 | 63.6  | 56.0  | 56.8 | 58.5 | 61.1  | 52.8  | 53.7  | 55.4 | 58.0  | 50.0  | 50.8  | 52.5 | 55.1  |       |
| S/T   | 0.88    | 0.81                        | 0.68 | 0.6   | 1.00  | 0.81 | 0.69 | 0.6   | 1.00  | 0.84 | 0.71 | 0.6   | 1.00  | 0.85 | 0.73 | 0.6   | 1.00  | 0.87  | 0.75 | 0.6   | 1.00  | 1.00  | 0.80 | 0.7   |       |
| ΔT    | 29      | 27                          | 23   | 19    | 29    | 27   | 23   | 19    | 30    | 27   | 23   | 19    | 29    | 27   | 23   | 19    | 29    | 27    | 23   | 19    | 30    | 28    | 24   | 20    |       |
| KW    | 3.36    | 3.36                        | 3.35 | 3.4   | 3.75  | 3.75 | 3.74 | 3.8   | 4.19  | 4.19 | 4.18 | 4.2   | 4.67  | 4.67 | 4.66 | 4.7   | 5.20  | 5.20  | 5.19 | 5.2   | 5.82  | 5.82  | 5.82 | 5.8   |       |
| Amps  | 11.8    | 11.8                        | 11.8 | 11.9  | 13.5  | 13.5 | 13.5 | 13.6  | 15.4  | 15.4 | 15.4 | 15.5  | 17.5  | 17.5 | 17.5 | 17.6  | 19.8  | 19.8  | 19.8 | 19.9  | 22.5  | 22.5  | 22.5 | 22.6  |       |
| Hi PR | 254     | 255                         | 257  | 261.0 | 293   | 294  | 296  | 299.9 | 333   | 335  | 336  | 340.6 | 377   | 378  | 380  | 384.4 | 425   | 426   | 427  | 431.6 | 475   | 476   | 478  | 482.0 |       |
| Lo PR | 118     | 119                         | 122  | 126.5 | 124   | 126  | 128  | 133.2 | 130   | 132  | 134  | 139.1 | 135   | 137  | 139  | 144.1 | 140   | 141   | 144  | 149.0 | 146   | 148   | 150  | 155.1 |       |

|       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |      |      |       |       |
|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| 85    | MBh   | 59.0 | 59.8 | 61.5  | 64.1  | 58.5 | 59.3 | 61.0  | 63.6  | 57.0 | 57.8 | 59.5  | 62.1  | 54.5 | 55.3 | 57.0  | 59.6  | 51.3 | 52.1 | 53.8  | 56.4  | 48.5 | 49.3 | 51.0  | 53.6  |
|       | S/T   | 1.00 | 0.86 | 0.74  | 0.6   | 1.00 | 0.87 | 0.74  | 0.6   | 1.00 | 0.89 | 0.76  | 0.6   | 1.00 | 0.91 | 0.78  | 0.7   | 1.00 | 1.00 | 0.80  | 0.7   | 1.00 | 1.00 | 0.85  | 0.7   |
|       | ΔT    | 36   | 34   | 30    | 26    | 36   | 34   | 30    | 26    | 36   | 34   | 30    | 26    | 36   | 34   | 30    | 26    | 36   | 34   | 30    | 25    | 37   | 35   | 31    | 27    |
|       | KW    | 3.33 | 3.32 | 3.32  | 3.3   | 3.72 | 3.72 | 3.71  | 3.7   | 4.16 | 4.16 | 4.15  | 4.2   | 4.64 | 4.63 | 4.63  | 4.7   | 5.17 | 5.17 | 5.16  | 5.2   | 5.79 | 5.79 | 5.78  | 5.8   |
|       | Amps  | 11.7 | 11.7 | 11.6  | 11.8  | 13.4 | 13.4 | 13.3  | 13.5  | 15.3 | 15.3 | 15.3  | 15.4  | 17.4 | 17.4 | 17.3  | 17.5  | 19.7 | 19.7 | 19.6  | 19.8  | 22.4 | 22.4 | 22.4  | 22.5  |
|       | Hi PR | 250  | 251  | 253   | 257.2 | 289  | 290  | 292   | 296.0 | 330  | 331  | 332   | 336.7 | 373  | 375  | 376   | 380.5 | 421  | 422  | 423   | 427.8 | 471  | 472  | 474   | 478.2 |
|       | Lo PR | 114  | 116  | 119   | 123.3 | 121  | 123  | 125   | 130.1 | 127  | 128  | 131   | 136.0 | 132  | 133  | 136   | 140.9 | 137  | 138  | 141   | 145.8 | 143  | 144  | 147   | 152.0 |
|       | MBh   | 60.1 | 60.9 | 62.6  | 65.2  | 59.6 | 60.4 | 62.1  | 64.7  | 58.1 | 58.9 | 60.6  | 63.2  | 55.6 | 56.4 | 58.1  | 60.7  | 52.4 | 53.2 | 54.9  | 57.5  | 49.6 | 50.4 | 52.1  | 54.7  |
|       | S/T   | 1.00 | 0.89 | 0.77  | 0.6   | 1.00 | 0.90 | 0.78  | 0.6   | 1.00 | 0.92 | 0.80  | 0.7   | 1.00 | 1.00 | 0.82  | 0.7   | 1.00 | 1.00 | 0.84  | 0.7   | 1.00 | 1.00 | 0.88  | 0.8   |
|       | ΔT    | 35   | 33   | 29    | 24    | 35   | 33   | 29    | 24    | 35   | 33   | 29    | 25    | 35   | 33   | 28    | 24    | 34   | 32   | 28    | 24    | 36   | 34   | 30    | 25    |
| KW    | 3.35  | 3.34 | 3.34 | 3.37  | 3.74  | 3.74 | 3.73 | 3.76  | 4.18  | 4.18 | 4.17 | 4.20  | 4.66  | 4.66 | 4.65 | 4.68  | 5.19  | 5.19 | 5.18 | 5.21  | 5.81  | 5.81 | 5.80 | 5.83  |       |
| Amps  | 11.8  | 11.7 | 11.7 | 11.8  | 13.5  | 13.5 | 13.4 | 13.6  | 15.4  | 15.4 | 15.3 | 15.5  | 17.5  | 17.4 | 17.4 | 17.5  | 19.8  | 19.8 | 19.7 | 19.9  | 22.5  | 22.5 | 22.4 | 22.6  |       |
| Hi PR | 253   | 254  | 255  | 259.6 | 291   | 292  | 294  | 298.5 | 332   | 333  | 335  | 339.2 | 376   | 377  | 379  | 383.0 | 423   | 424  | 426  | 430.2 | 474   | 475  | 476  | 480.7 |       |
| Lo PR | 117   | 118  | 121  | 125.5 | 123   | 125  | 128  | 132.3 | 129   | 131  | 133  | 138.2 | 134   | 136  | 138  | 143.1 | 139   | 141  | 143  | 148.0 | 145   | 147  | 149  | 154.2 |       |
| MBh   | 61.5  | 62.3 | 64.0 | 66.6  | 61.0  | 61.8 | 63.5 | 66.1  | 59.5  | 60.3 | 62.0 | 64.6  | 56.9  | 57.7 | 59.4 | 62.0  | 53.8  | 54.6 | 56.3 | 58.9  | 51.0  | 51.8 | 53.5 | 56.1  |       |
| S/T   | 1.00  | 0.90 | 0.78 | 0.6   | 1.00  | 0.90 | 0.78 | 0.7   | 1.00  | 0.93 | 0.80 | 0.7   | 1.00  | 1.00 | 0.82 | 0.7   | 1.00  | 1.00 | 0.84 | 0.7   | 1.00  | 1.00 | 0.89 | 0.8   |       |
| ΔT    | 34    | 31   | 27   | 23    | 34    | 31   | 27   | 23    | 34    | 32   | 28   | 23    | 34    | 31   | 27   | 23    | 33    | 31   | 27   | 23    | 35    | 32   | 28   | 24    |       |
| KW    | 3.37  | 3.36 | 3.36 | 3.4   | 3.76  | 3.76 | 3.75 | 3.8   | 4.20  | 4.20 | 4.19 | 4.2   | 4.68  | 4.67 | 4.67 | 4.7   | 5.21  | 5.21 | 5.20 | 5.2   | 5.83  | 5.83 | 5.82 | 5.9   |       |
| Amps  | 11.8  | 11.8 | 11.8 | 11.9  | 13.5  | 13.5 | 13.5 | 13.6  | 15.5  | 15.4 | 15.4 | 15.6  | 17.5  | 17.5 | 17.5 | 17.6  | 19.8  | 19.8 | 19.8 | 19.9  | 22.6  | 22.5 | 22.5 | 22.6  |       |
| Hi PR | 255   | 256  | 258  | 262.2 | 294   | 295  | 297  | 301.0 | 335   | 336  | 337  | 341.7 | 378   | 380  | 381  | 385.5 | 426   | 427  | 428  | 432.8 | 476   | 477  | 479  | 483.2 |       |
| Lo PR | 119   | 121  | 123  | 128.1 | 126   | 127  | 130  | 134.9 | 132   | 133  | 136  | 140.7 | 137   | 138  | 141  | 145.7 | 142   | 143  | 146  | 150.6 | 148   | 149  | 152  | 156.7 |       |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB         | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |      |     |      |      |      |     |      |      |      |     |      |      |      |     |       |      |      |      |       |      |      |    |
|-------------|---------|-----------------------------|------|------|-----|------|------|------|-----|------|------|------|-----|------|------|------|-----|-------|------|------|------|-------|------|------|----|
|             |         | 65°F                        |      |      |     | 75°F |      |      |     | 85°F |      |      |     | 95°F |      |      |     | 105°F |      |      |      | 115°F |      |      |    |
|             |         | 59                          | 63   | 67   | 71  | 59   | 63   | 67   | 71  | 59   | 63   | 67   | 71  | 59   | 63   | 67   | 71  | 59    | 63   | 67   | 71   | 59    | 63   | 67   | 71 |
| <b>70</b>   | MBh     | 41.0                        | 41.6 | 42.8 | -   | 40.6 | 41.2 | 42.4 | -   | 39.6 | 40.1 | 41.4 | -   | 37.7 | 38.3 | 39.5 | -   | 35.5  | 36.0 | 37.3 | 0.0  | 33.4  | 34.0 | 35.2 | -  |
|             | S/T     | 0.57                        | 0.50 | 0.37 | -   | 0.58 | 0.50 | 0.38 | -   | 0.60 | 0.53 | 0.40 | -   | 0.62 | 0.55 | 0.42 | -   | 0.64  | 0.57 | 0.44 | 0.0  | 1.00  | 0.62 | 0.49 | -  |
|             | ΔT      | 23                          | 21   | 17   | -   | 23   | 20   | 17   | -   | 23   | 21   | 17   | -   | 23   | 20   | 17   | -   | 22    | 20   | 16   | 0    | 24    | 21   | 18   | -  |
|             | kW      | 2.08                        | 2.07 | 2.07 | -   | 2.32 | 2.32 | 2.32 | -   | 2.60 | 2.60 | 2.60 | -   | 2.90 | 2.90 | 2.89 | -   | 3.24  | 3.23 | 3.23 | 0.0  | 3.63  | 3.63 | 3.62 | -  |
|             | Amps    | 7.3                         | 7.3  | 7.2  | -   | 8.3  | 8.3  | 8.3  | -   | 9.6  | 9.5  | 9.5  | -   | 10.9 | 10.8 | 10.8 | -   | 12.3  | 12.3 | 12.3 | 0.0  | 14.0  | 14.0 | 14.0 | -  |
|             | Hi PR   | 235                         | 236  | 238  | -   | 273  | 274  | 275  | -   | 312  | 313  | 314  | -   | 353  | 354  | 356  | -   | 399   | 400  | 401  | 0.0  | 447   | 448  | 449  | -  |
| Lo PR       | 114     | 115                         | 118  | -    | 121 | 122  | 125  | -    | 127 | 128  | 131  | -    | 132 | 133  | 136  | -    | 137 | 138   | 141  | 0.0  | 143  | 145   | 148  | -    |    |
| <b>1155</b> | MBh     | 41.5                        | 42.1 | 43.3 | -   | 41.1 | 41.7 | 42.9 | -   | 40.1 | 40.6 | 41.9 | -   | 38.2 | 38.8 | 40.0 | -   | 36.0  | 36.6 | 37.8 | 0.0  | 33.9  | 34.5 | 35.7 | -  |
|             | S/T     | 0.62                        | 0.55 | 0.42 | -   | 0.63 | 0.56 | 0.43 | -   | 0.65 | 0.58 | 0.45 | -   | 0.67 | 0.60 | 0.47 | -   | 0.69  | 0.62 | 0.49 | 0.0  | 1.00  | 0.67 | 0.54 | -  |
|             | ΔT      | 21                          | 19   | 15   | -   | 21   | 19   | 15   | -   | 22   | 20   | 16   | -   | 21   | 19   | 15   | -   | 21    | 19   | 15   | 0    | 22    | 20   | 16   | -  |
|             | kW      | 2.09                        | 2.09 | 2.08 | -   | 2.34 | 2.33 | 2.33 | -   | 2.61 | 2.61 | 2.61 | -   | 2.91 | 2.91 | 2.91 | -   | 3.25  | 3.25 | 3.24 | 0.00 | 3.64  | 3.64 | 3.63 | -  |
|             | Amps    | 7.3                         | 7.3  | 7.3  | -   | 8.4  | 8.4  | 8.4  | -   | 9.6  | 9.6  | 9.6  | -   | 10.9 | 10.9 | 10.9 | -   | 12.4  | 12.4 | 12.3 | 0.0  | 14.1  | 14.1 | 14.0 | -  |
|             | Hi PR   | 237                         | 238  | 240  | -   | 274  | 275  | 277  | -   | 313  | 314  | 316  | -   | 355  | 356  | 358  | -   | 400   | 401  | 403  | 0.0  | 449   | 450  | 451  | -  |
| Lo PR       | 115     | 117                         | 120  | -    | 122 | 124  | 127  | -    | 128 | 130  | 133  | -    | 134 | 135  | 138  | -    | 139 | 140   | 143  | 0.0  | 145  | 146   | 149  | -    |    |
| <b>1290</b> | MBh     | 42.1                        | 42.7 | 43.9 | -   | 41.7 | 42.3 | 43.5 | -   | 40.7 | 41.2 | 42.5 | -   | 38.8 | 39.4 | 40.6 | -   | 36.6  | 37.2 | 38.4 | 0.0  | 34.5  | 35.1 | 36.3 | -  |
|             | S/T     | 0.65                        | 0.58 | 0.45 | -   | 0.66 | 0.59 | 0.46 | -   | 0.68 | 0.61 | 0.48 | -   | 0.70 | 0.63 | 0.50 | -   | 0.72  | 0.65 | 0.52 | 0.0  | 1.00  | 0.70 | 0.57 | -  |
|             | ΔT      | 20                          | 18   | 14   | -   | 20   | 18   | 14   | -   | 21   | 19   | 15   | -   | 20   | 18   | 14   | -   | 20    | 18   | 14   | 0    | 21    | 19   | 15   | -  |
|             | kW      | 2.10                        | 2.10 | 2.09 | -   | 2.35 | 2.34 | 2.34 | -   | 2.62 | 2.62 | 2.62 | -   | 2.92 | 2.92 | 2.92 | -   | 3.26  | 3.26 | 3.25 | 0.0  | 3.65  | 3.65 | 3.64 | -  |
|             | Amps    | 7.4                         | 7.4  | 7.3  | -   | 8.4  | 8.4  | 8.4  | -   | 9.6  | 9.6  | 9.6  | -   | 10.9 | 10.9 | 10.9 | -   | 12.4  | 12.4 | 12.4 | 0.0  | 14.1  | 14.1 | 14.1 | -  |
|             | Hi PR   | 239                         | 240  | 242  | -   | 276  | 277  | 279  | -   | 315  | 316  | 318  | -   | 357  | 358  | 360  | -   | 402   | 403  | 405  | 0.0  | 450   | 451  | 453  | -  |
| Lo PR       | 117     | 119                         | 121  | -    | 124 | 125  | 128  | -    | 130 | 132  | 134  | -    | 135 | 137  | 140  | -    | 140 | 142   | 145  | 0.0  | 147  | 148   | 151  | -    |    |

|             |       |      |      |       |       |      |      |       |       |      |      |       |       |            |             |       |       |      |      |       |       |      |      |       |       |
|-------------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------------|-------------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| <b>75</b>   | MBh   | 41.0 | 41.6 | 42.8  | 44.7  | 40.7 | 41.2 | 42.5  | 44.3  | 39.6 | 40.2 | 41.4  | 43.3  | 37.7       | 38.3        | 39.5  | 41.4  | 35.5 | 36.1 | 37.3  | 39.2  | 33.4 | 34.0 | 35.2  | 37.1  |
|             | S/T   | 0.69 | 0.62 | 0.49  | 0.4   | 0.70 | 0.63 | 0.50  | 0.4   | 0.72 | 0.65 | 0.52  | 0.4   | 0.74       | 0.67        | 0.54  | 0.4   | 1.00 | 0.69 | 0.56  | 0.4   | 1.00 | 0.74 | 0.61  | 0.5   |
|             | ΔT    | 27   | 25   | 21    | 17    | 27   | 25   | 21    | 17    | 28   | 25   | 21    | 17    | 27         | 25          | 21    | 17    | 27   | 25   | 21    | 17    | 28   | 26   | 22    | 18    |
|             | kW    | 2.08 | 2.07 | 2.07  | 2.1   | 2.32 | 2.32 | 2.32  | 2.3   | 2.60 | 2.60 | 2.59  | 2.6   | 2.90       | 2.90        | 2.89  | 2.9   | 3.23 | 3.23 | 3.23  | 3.2   | 3.63 | 3.62 | 3.62  | 3.6   |
|             | Amps  | 7.3  | 7.3  | 7.2   | 7.3   | 8.3  | 8.3  | 8.3   | 8.4   | 9.5  | 9.5  | 9.5   | 9.6   | 10.8       | 10.8        | 10.8  | 10.9  | 12.3 | 12.3 | 12.3  | 12.4  | 14.0 | 14.0 | 14.0  | 14.1  |
|             | Hi PR | 236  | 237  | 238   | 242.5 | 273  | 274  | 275   | 279.6 | 312  | 313  | 314   | 318.5 | 354        | 355         | 356   | 360.4 | 399  | 400  | 401   | 405.6 | 447  | 448  | 450   | 453.8 |
| Lo PR       | 114   | 115  | 118  | 123.0 | 121   | 122  | 125  | 129.9 | 127   | 128  | 131  | 136.0 | 132   | 133        | 136         | 141.1 | 137   | 138  | 141  | 146.1 | 143   | 145  | 148  | 152.4 |       |
| <b>1155</b> | MBh   | 41.5 | 42.1 | 43.3  | 45.2  | 41.2 | 41.7 | 43.0  | 44.8  | 40.1 | 40.7 | 41.9  | 43.8  | 38.2       | <b>38.8</b> | 40.1  | 41.9  | 36.0 | 36.6 | 37.8  | 39.7  | 33.9 | 34.5 | 35.7  | 37.6  |
|             | S/T   | 0.74 | 0.67 | 0.54  | 0.4   | 0.75 | 0.68 | 0.55  | 0.4   | 0.77 | 0.70 | 0.57  | 0.4   | 1.00       | <b>0.72</b> | 0.59  | 0.5   | 1.00 | 0.74 | 0.61  | 0.5   | 1.00 | 0.79 | 0.66  | 0.5   |
|             | ΔT    | 26   | 24   | 20    | 16    | 26   | 24   | 20    | 16    | 26   | 24   | 20    | 16    | 26         | <b>24</b>   | 20    | 16    | 26   | 24   | 20    | 16    | 27   | 25   | 21    | 17    |
|             | kW    | 2.09 | 2.09 | 2.08  | 2.10  | 2.33 | 2.33 | 2.33  | 2.35  | 2.61 | 2.61 | 2.61  | 2.62  | 2.91       | <b>2.91</b> | 2.91  | 2.92  | 3.25 | 3.24 | 3.24  | 3.26  | 3.64 | 3.64 | 3.63  | 3.65  |
|             | Amps  | 7.3  | 7.3  | 7.3   | 7.4   | 8.4  | 8.4  | 8.4   | 8.4   | 9.6  | 9.6  | 9.6   | 9.7   | 10.9       | <b>10.9</b> | 10.9  | 11.0  | 12.4 | 12.3 | 12.3  | 12.4  | 14.1 | 14.1 | 14.0  | 14.1  |
|             | Hi PR | 238  | 239  | 240   | 244.3 | 275  | 276  | 277   | 281.5 | 314  | 315  | 316   | 320.4 | 355        | <b>356</b>  | 358   | 362.3 | 401  | 402  | 403   | 407.4 | 449  | 450  | 452   | 455.6 |
| Lo PR       | 115   | 117  | 120  | 124.6 | 122   | 124  | 127  | 131.5 | 128   | 130  | 133  | 137.6 | 134   | <b>135</b> | 138         | 142.7 | 139   | 140  | 143  | 147.7 | 145   | 146  | 149  | 154.0 |       |
| <b>1290</b> | MBh   | 42.1 | 42.7 | 43.9  | 45.8  | 41.8 | 42.3 | 43.6  | 45.4  | 40.7 | 41.3 | 42.5  | 44.4  | 38.8       | 39.4        | 40.7  | 42.5  | 36.6 | 37.2 | 38.4  | 40.3  | 34.5 | 35.1 | 36.3  | 38.2  |
|             | S/T   | 0.77 | 0.70 | 0.57  | 0.4   | 0.78 | 0.71 | 0.58  | 0.4   | 0.80 | 0.73 | 0.60  | 0.5   | 1.00       | 0.75        | 0.62  | 0.5   | 1.00 | 0.77 | 0.64  | 0.5   | 1.00 | 0.82 | 0.69  | 0.6   |
|             | ΔT    | 25   | 23   | 19    | 15    | 25   | 23   | 19    | 15    | 25   | 23   | 19    | 15    | 25         | <b>23</b>   | 19    | 15    | 25   | 23   | 19    | 15    | 26   | 24   | 20    | 16    |
|             | kW    | 2.10 | 2.10 | 2.09  | 2.1   | 2.35 | 2.34 | 2.34  | 2.4   | 2.62 | 2.62 | 2.62  | 2.6   | 2.92       | 2.92        | 2.92  | 2.9   | 3.26 | 3.25 | 3.25  | 3.3   | 3.65 | 3.65 | 3.64  | 3.7   |
|             | Amps  | 7.4  | 7.3  | 7.3   | 7.4   | 8.4  | 8.4  | 8.4   | 8.5   | 9.6  | 9.6  | 9.6   | 9.7   | 10.9       | 10.9        | 10.9  | 11.0  | 12.4 | 12.4 | 12.4  | 12.5  | 14.1 | 14.1 | 14.1  | 14.2  |
|             | Hi PR | 239  | 240  | 242   | 246.1 | 276  | 278  | 279   | 283.3 | 315  | 316  | 318   | 322.2 | 357        | 358         | 360   | 364.1 | 402  | 403  | 405   | 409.2 | 451  | 452  | 453   | 457.4 |
| Lo PR       | 117   | 119  | 121  | 126.3 | 124   | 125  | 128  | 133.2 | 130   | 132  | 134  | 139.3 | 135   | 137        | 140         | 144.4 | 140   | 142  | 145  | 149.4 | 147   | 148  | 151  | 155.7 |       |

Shaded area is ACCA (TVA) conditions  
 kW = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| IDB   | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE |      |       |       |      |      |       |       |      |      |       |       | ENTERING INDOOR WET BULB TEMPERATURE |      |       |       |       |      |       |       |       |      |       |       |      |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|------|
|       |         | 65°F                        |      |       |       | 75°F |      |       |       | 85°F |      |       |       | 95°F                                 |      |       |       | 105°F |      |       |       | 115°F |      |       |       |      |
|       |         | 59                          | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59   | 63   | 67    | 71    | 59                                   | 63   | 67    | 71    | 59    | 63   | 67    | 71    | 59    | 63   | 67    | 71    |      |
| 80    | 1020    | MBh                         | 41.2 | 41.8  | 43.0  | 44.9 | 40.9 | 41.4  | 42.7  | 44.5 | 39.8 | 40.4  | 41.6  | 43.5                                 | 38.0 | 38.5  | 39.8  | 41.6  | 35.7 | 36.3  | 37.5  | 39.4  | 33.7 | 34.2  | 35.5  | 37.3 |
|       |         | S/T                         | 0.81 | 0.74  | 0.61  | 0.5  | 0.81 | 0.74  | 0.62  | 0.5  | 1.00 | 0.77  | 0.64  | 0.5                                  | 1.00 | 0.78  | 0.66  | 0.5   | 1.00 | 0.80  | 0.68  | 0.5   | 1.00 | 0.85  | 0.73  | 0.6  |
|       | ΔT      | 32                          | 30   | 26    | 22    | 32   | 30   | 26    | 22    | 32   | 30   | 26    | 22    | 32                                   | 30   | 26    | 22    | 32    | 29   | 26    | 21    | 33    | 31   | 27    | 23    |      |
|       | KW      | 2.08                        | 2.07 | 2.07  | 2.1   | 2.32 | 2.32 | 2.32  | 2.3   | 2.60 | 2.60 | 2.59  | 2.6   | 2.90                                 | 2.90 | 2.89  | 2.9   | 3.24  | 3.23 | 3.23  | 3.2   | 3.63  | 3.63 | 3.62  | 3.6   |      |
|       | Amps    | 7.3                         | 7.3  | 7.2   | 7.3   | 8.3  | 8.3  | 8.3   | 8.4   | 9.5  | 9.5  | 9.5   | 9.6   | 10.9                                 | 10.8 | 10.8  | 10.9  | 12.3  | 12.3 | 12.3  | 12.4  | 14.0  | 14.0 | 14.0  | 14.1  |      |
|       | Hi PR   | 236                         | 237  | 239   | 242.9 | 273  | 274  | 276   | 280.0 | 312  | 313  | 315   | 318.9 | 354                                  | 355  | 357   | 360.8 | 399   | 400  | 402   | 406.0 | 447   | 448  | 450   | 454.2 |      |
|       | Lo PR   | 114                         | 116  | 119   | 123.5 | 121  | 123  | 126   | 130.4 | 127  | 129  | 132   | 136.5 | 132                                  | 134  | 137   | 141.6 | 138   | 139  | 142   | 146.7 | 144   | 145  | 148   | 152.9 |      |
|       | MBh     | 41.7                        | 42.3 | 43.5  | 45.4  | 41.4 | 42.0 | 43.2  | 45.0  | 40.3 | 40.9 | 42.1  | 44.0  | 38.5                                 | 39.0 | 40.3  | 42.1  | 36.2  | 36.8 | 38.0  | 39.9  | 34.2  | 34.7 | 36.0  | 37.8  |      |
|       | S/T     | 0.86                        | 0.79 | 0.66  | 0.5   | 1.00 | 0.79 | 0.67  | 0.5   | 1.00 | 0.82 | 0.69  | 0.6   | 1.00                                 | 0.84 | 0.71  | 0.6   | 1.00  | 0.86 | 0.73  | 0.6   | 1.00  | 1.00 | 0.78  | 0.6   |      |
|       | ΔT      | 31                          | 29   | 25    | 21    | 31   | 29   | 25    | 21    | 31   | 29   | 25    | 21    | 31                                   | 29   | 25    | 21    | 30    | 28   | 24    | 20    | 32    | 30   | 26    | 22    |      |
| KW    | 2.09    | 2.09                        | 2.08 | 2.10  | 2.34  | 2.33 | 2.33 | 2.35  | 2.61  | 2.61 | 2.61 | 2.63  | 2.91  | 2.91                                 | 2.91 | 2.93  | 3.25  | 3.25  | 3.24 | 3.26  | 3.64  | 3.64  | 3.63 | 3.65  |       |      |
| Amps  | 7.3     | 7.3                         | 7.3  | 7.4   | 8.4   | 8.4  | 8.4  | 8.5   | 9.6   | 9.6  | 9.6  | 9.7   | 10.9  | 10.9                                 | 10.9 | 11.0  | 12.4  | 12.3  | 12.3 | 12.4  | 14.1  | 14.1  | 14.0 | 14.1  |       |      |
| Hi PR | 238     | 239                         | 241  | 244.8 | 275   | 276  | 278  | 281.9 | 314   | 315  | 317  | 320.8 | 356   | 357                                  | 359  | 362.7 | 401   | 402   | 404  | 407.9 | 449   | 450   | 452  | 456.1 |       |      |
| Lo PR | 116     | 117                         | 120  | 125.1 | 123   | 124  | 127  | 132.0 | 129   | 130  | 133  | 138.1 | 134   | 135                                  | 138  | 143.2 | 139   | 140   | 143  | 148.2 | 145   | 147   | 150  | 154.5 |       |      |
| MBh   | 42.3    | 42.9                        | 44.1 | 46.0  | 42.0  | 42.6 | 43.8 | 45.6  | 40.9  | 41.5 | 42.7 | 44.6  | 39.1  | 39.6                                 | 40.9 | 42.7  | 36.8  | 37.4  | 38.6 | 40.5  | 34.8  | 35.3  | 36.6 | 38.4  |       |      |
| S/T   | 0.89    | 0.82                        | 0.69 | 0.6   | 1.00  | 0.82 | 0.70 | 0.6   | 1.00  | 0.85 | 0.72 | 0.6   | 1.00  | 0.87                                 | 0.74 | 0.6   | 1.00  | 0.89  | 0.76 | 0.6   | 1.00  | 1.00  | 0.81 | 0.7   |       |      |
| ΔT    | 30      | 28                          | 24   | 20    | 30    | 28   | 24   | 20    | 30    | 28   | 24   | 20    | 30    | 28                                   | 24   | 20    | 29    | 27    | 23   | 19    | 31    | 29    | 25   | 21    |       |      |
| KW    | 2.10    | 2.10                        | 2.09 | 2.1   | 2.35  | 2.34 | 2.34 | 2.4   | 2.62  | 2.62 | 2.62 | 2.6   | 2.92  | 2.92                                 | 2.92 | 2.9   | 3.26  | 3.26  | 3.25 | 3.3   | 3.65  | 3.65  | 3.64 | 3.7   |       |      |
| Amps  | 7.4     | 7.4                         | 7.3  | 7.4   | 8.4   | 8.4  | 8.4  | 8.5   | 9.6   | 9.6  | 9.6  | 9.7   | 10.9  | 10.9                                 | 10.9 | 11.0  | 12.4  | 12.4  | 12.4 | 12.5  | 14.1  | 14.1  | 14.1 | 14.2  |       |      |
| Hi PR | 240     | 241                         | 242  | 246.6 | 277   | 278  | 280  | 283.7 | 316   | 317  | 319  | 322.6 | 358   | 359                                  | 360  | 364.5 | 403   | 404   | 406  | 409.7 | 451   | 452   | 454  | 457.9 |       |      |
| Lo PR | 118     | 119                         | 122  | 126.8 | 125   | 126  | 129  | 133.7 | 131   | 132  | 135  | 139.8 | 136   | 137                                  | 140  | 144.9 | 141   | 142   | 145  | 149.9 | 147   | 149   | 151  | 156.2 |       |      |
| 85    | 1020    | MBh                         | 41.9 | 42.5  | 43.7  | 45.6 | 41.6 | 42.1  | 43.4  | 45.2 | 40.5 | 41.1  | 42.3  | 44.2                                 | 38.6 | 39.2  | 40.4  | 42.3  | 36.4 | 37.0  | 38.2  | 40.1  | 34.3 | 34.9  | 36.1  | 38.0 |
|       |         | S/T                         | 1.00 | 0.83  | 0.70  | 0.6  | 1.00 | 0.84  | 0.71  | 0.6  | 1.00 | 0.86  | 0.73  | 0.6                                  | 1.00 | 1.00  | 0.75  | 0.6   | 1.00 | 1.00  | 0.77  | 0.6   | 1.00 | 1.00  | 0.82  | 0.7  |
|       | ΔT      | 36                          | 34   | 30    | 26    | 36   | 34   | 30    | 26    | 36   | 34   | 30    | 26    | 36                                   | 34   | 30    | 26    | 36    | 34   | 30    | 26    | 37    | 35   | 31    | 27    |      |
|       | KW      | 2.08                        | 2.08 | 2.07  | 2.1   | 2.33 | 2.33 | 2.32  | 2.3   | 2.61 | 2.60 | 2.60  | 2.6   | 2.91                                 | 2.90 | 2.90  | 2.9   | 3.24  | 3.24 | 3.23  | 3.3   | 3.63  | 3.63 | 3.63  | 3.6   |      |
|       | Amps    | 7.3                         | 7.3  | 7.3   | 7.3   | 8.4  | 8.4  | 8.3   | 8.4   | 9.6  | 9.6  | 9.5   | 9.6   | 10.9                                 | 10.9 | 10.8  | 10.9  | 12.3  | 12.3 | 12.3  | 12.4  | 14.0  | 14.0 | 14.0  | 14.1  |      |
|       | Hi PR   | 237                         | 238  | 240   | 244.0 | 274  | 275  | 277   | 281.1 | 313  | 314  | 316   | 320.0 | 355                                  | 356  | 358   | 361.9 | 400   | 401  | 403   | 407.1 | 449   | 450  | 451   | 455.3 |      |
|       | Lo PR   | 116                         | 117  | 120   | 125.2 | 123  | 124  | 127   | 132.1 | 129  | 130  | 133   | 138.2 | 134                                  | 136  | 138   | 143.3 | 139   | 141  | 144   | 148.4 | 146   | 147  | 150   | 154.7 |      |
|       | MBh     | 42.4                        | 43.0 | 44.2  | 46.1  | 42.1 | 42.6 | 43.9  | 45.7  | 41.0 | 41.6 | 42.8  | 44.7  | 39.2                                 | 39.7 | 41.0  | 42.8  | 36.9  | 37.5 | 38.7  | 40.6  | 34.8  | 35.4 | 36.7  | 38.5  |      |
|       | S/T     | 1.00                        | 0.88 | 0.76  | 0.6   | 1.00 | 0.89 | 0.76  | 0.6   | 1.00 | 0.91 | 0.79  | 0.7   | 1.00                                 | 1.00 | 0.80  | 0.7   | 1.00  | 1.00 | 0.82  | 0.7   | 1.00  | 1.00 | 0.87  | 0.7   |      |
|       | ΔT      | 35                          | 33   | 29    | 25    | 35   | 33   | 29    | 25    | 35   | 33   | 29    | 25    | 35                                   | 33   | 29    | 25    | 35    | 32   | 28    | 24    | 36    | 34   | 30    | 26    |      |
| KW    | 2.09    | 2.09                        | 2.09 | 2.11  | 2.34  | 2.34 | 2.33 | 2.35  | 2.62  | 2.62 | 2.61 | 2.63  | 2.92  | 2.92                                 | 2.91 | 2.93  | 3.25  | 3.25  | 3.25 | 3.26  | 3.64  | 3.64  | 3.64 | 3.66  |       |      |
| Amps  | 7.3     | 7.3                         | 7.3  | 7.4   | 8.4   | 8.4  | 8.4  | 8.5   | 9.6   | 9.6  | 9.6  | 9.7   | 10.9  | 10.9                                 | 10.9 | 11.0  | 12.4  | 12.4  | 12.4 | 12.4  | 14.1  | 14.1  | 14.1 | 14.1  |       |      |
| Hi PR | 239     | 240                         | 242  | 245.9 | 276   | 277  | 279  | 283.0 | 315   | 316  | 318  | 321.9 | 357   | 358                                  | 360  | 363.8 | 402   | 403   | 405  | 409.0 | 450   | 451   | 453  | 457.2 |       |      |
| Lo PR | 118     | 119                         | 122  | 126.8 | 125   | 126  | 129  | 133.7 | 131   | 132  | 135  | 139.8 | 136   | 137                                  | 140  | 144.9 | 141   | 142   | 145  | 149.9 | 147   | 148   | 151  | 156.2 |       |      |
| MBh   | 43.0    | 43.6                        | 44.8 | 46.7  | 42.7  | 43.2 | 44.5 | 46.3  | 41.6  | 42.2 | 43.4 | 45.3  | 39.8  | 40.3                                 | 41.6 | 43.4  | 37.5  | 38.1  | 39.3 | 41.2  | 35.4  | 36.0  | 37.3 | 39.1  |       |      |
| S/T   | 1.00    | 0.91                        | 0.79 | 0.7   | 1.00  | 0.92 | 0.79 | 0.7   | 1.00  | 0.94 | 0.82 | 0.7   | 1.00  | 1.00                                 | 0.83 | 0.7   | 1.00  | 1.00  | 0.85 | 0.7   | 1.00  | 1.00  | 0.90 | 0.8   |       |      |
| ΔT    | 34      | 32                          | 28   | 24    | 34    | 32   | 28   | 24    | 34    | 32   | 28   | 24    | 34    | 32                                   | 28   | 24    | 33    | 31    | 27   | 23    | 35    | 33    | 29   | 25    |       |      |
| KW    | 2.10    | 2.10                        | 2.10 | 2.1   | 2.35  | 2.35 | 2.34 | 2.4   | 2.63  | 2.63 | 2.62 | 2.6   | 2.93  | 2.93                                 | 2.92 | 2.9   | 3.26  | 3.26  | 3.26 | 3.3   | 3.65  | 3.65  | 3.65 | 3.7   |       |      |
| Amps  | 7.4     | 7.4                         | 7.4  | 7.4   | 8.5   | 8.5  | 8.4  | 8.5   | 9.7   | 9.7  | 9.6  | 9.7   | 11.0  | 11.0                                 | 10.9 | 11.0  | 12.4  | 12.4  | 12.4 | 12.5  | 14.1  | 14.1  | 14.1 | 14.2  |       |      |
| Hi PR | 241     | 242                         | 244  | 247.7 | 278   | 279  | 281  | 284.8 | 317   | 318  | 320  | 323.7 | 359   | 360                                  | 362  | 365.6 | 404   | 405   | 407  | 410.8 | 452   | 453   | 455  | 459.0 |       |      |
| Lo PR | 119     | 121                         | 124  | 128.5 | 126   | 128  | 131  | 135.4 | 132   | 134  | 137  | 141.5 | 137   | 139                                  | 142  | 146.6 | 143   | 144   | 147  | 151.6 | 149   | 150   | 153  | 157.9 |       |      |

IDB = Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area is AHRI (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

| GSXC702410A*+CA*TA2422*4*+EEP - LOW STAGE<br>CONDITIONS: 80 °F IBD, 67 °F IWB @ 565 CFM |               |               |              |              |
|---|---------------|---------------|--------------|--------------|
| OUTDOOR TEM. ° F.   | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH  | TOTAL WATTS  |
| 75  | 17,580        | 12,410        | 7,638        | 980          |
| 80  | 17,360        | 12,470        | 7,260        | 1,040        |
| 85  | 17,140        | 12,530        | 6,882        | 1,090        |
| 90  | 16,770        | 12,410        | 6,520        | 1,150        |
| <b>95</b>   | <b>16,390</b> | <b>12,290</b> | <b>6,150</b> | <b>1,200</b> |
| 100   | 15,940        | 12,120        | 5,750        | 1,270        |
| 105   | 15,480        | 11,950        | 5,346        | 1,330        |
| 110   | 15,060        | 12,000        | 4,700        | 1,410        |
| 115   | 14,640        | 12,040        | 4,054        | 1,480        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB   |               |               |              |              |
| <b>95</b>   | <b>15,810</b> | <b>12,020</b> | <b>5,720</b> | <b>1,200</b> |

| GSXC70310A*+CA*TA3626*4A*+EEP - LOW STAGE<br>CONDITIONS: 80 °F IBD, 67 °F IWB @ 780 CFM |               |               |              |              |
|---|---------------|---------------|--------------|--------------|
| OUTDOOR TEM. ° F.   | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH  | TOTAL WATTS  |
| 75  | 26,370        | 19,380        | 10,422       | 1,450        |
| 80  | 26,040        | 19,470        | 9,850        | 1,530        |
| 85  | 25,710        | 19,560        | 9,273        | 1,610        |
| 90  | 25,150        | 19,380        | 8,740        | 1,700        |
| <b>95</b>   | <b>24,590</b> | <b>19,200</b> | <b>8,200</b> | <b>1,780</b> |
| 100   | 23,910        | 18,930        | 7,610        | 1,880        |
| 105   | 23,220        | 18,660        | 7,029        | 1,970        |
| 110   | 22,590        | 18,740        | 6,050        | 2,090        |
| 115   | 21,960        | 18,810        | 5,075        | 2,200        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB   |               |               |              |              |
| <b>95</b>   | <b>23,710</b> | <b>18,760</b> | <b>7,570</b> | <b>1,780</b> |

| GSXC704810A*+CA*T4961*4A*+EEP - LOW STAGE<br>CONDITIONS: 80 °F IBD, 67 °F IWB @ 1045 CFM |               |               |               |              |
|--|---------------|---------------|---------------|--------------|
| OUTDOOR TEM. ° F.  | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH   | TOTAL WATTS  |
| 75   | 36,240        | 24,880        | 15,610        | 1,960        |
| 80   | 35,790        | 25,000        | 14,840        | 2,070        |
| 85   | 35,340        | 25,120        | 14,060        | 2,180        |
| 90   | 34,570        | 24,890        | 13,330        | 2,300        |
| <b>95</b>  | <b>33,790</b> | <b>24,650</b> | <b>12,590</b> | <b>2,420</b> |
| 100  | 32,850        | 24,300        | 11,780        | 2,550        |
| 105  | 31,910        | 23,950        | 10,960        | 2,680        |
| 110  | 31,050        | 24,050        | 9,650         | 2,840        |
| 115  | 30,180        | 24,150        | 8,330         | 2,990        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB  |               |               |               |              |
| <b>95</b>  | <b>32,590</b> | <b>24,090</b> | <b>11,710</b> | <b>2,420</b> |


| GSXC706010A*+CA*T4961*4A*+EEP - Low<br>STAGE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1155 CFM |               |               |               |              |
|--|---------------|---------------|---------------|--------------|
| OUTDOOR TEM. ° F.  | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH   | TOTAL WATTS  |
| 75   | 43,170        | 28,810        | 19,310        | 2,330        |
| 80   | 42,640        | 28,950        | 18,400        | 2,470        |
| 85   | 42,100        | 29,080        | 17,480        | 2,610        |
| 90   | 41,180        | 28,810        | 16,600        | 2,760        |
| <b>95</b>  | <b>40,260</b> | <b>28,540</b> | <b>15,720</b> | <b>2,910</b> |
| 100  | 39,140        | 28,140        | 14,750        | 3,080        |
| 105  | 38,010        | 27,730        | 13,770        | 3,240        |
| 110  | 36,990        | 27,850        | 12,210        | 3,440        |
| 115  | 35,960        | 27,960        | 10,650        | 3,630        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB  |               |               |               |              |
| <b>95</b>  | <b>38,830</b> | <b>27,890</b> | <b>14,660</b> | <b>2,910</b> |

| GSXC702410A*+CA*TA2422*4A*+EEP - HIGH STAGE<br>CONDITIONS: 80 °F IBD, 67 °F IWB @ 800 CFM |               |               |              |              |
|---|---------------|---------------|--------------|--------------|
| OUTDOOR TEM. ° F.   | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH  | TOTAL WATTS  |
| 75  | 24,448        | 16,810        | 7,638        | 1,560        |
| 80  | 24,140        | 16,890        | 7,260        | 1,650        |
| 85  | 23,842        | 16,960        | 6,882        | 1,730        |
| 90  | 23,320        | 16,810        | 6,520        | 1,820        |
| <b>95</b>   | <b>22,800</b> | <b>16,650</b> | <b>6,150</b> | <b>1,910</b> |
| 100   | 22,160        | 16,420        | 5,750        | 2,010        |
| 105   | 21,526        | 16,180        | 5,346        | 2,110        |
| 110   | 20,940        | 16,250        | 4,700        | 2,230        |
| 115   | 20,364        | 16,310        | 4,054        | 2,350        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB   |               |               |              |              |
| <b>95</b>   | <b>21,990</b> | <b>16,270</b> | <b>5,720</b> | <b>1,910</b> |

| GSXC703610A*+CA*TA626*4A*+EEP - HIGH STAGE<br>CONDITIONS: 80 °F IBD, 67 °F IWB @ 1200 CFM |               |               |              |              |
|---|---------------|---------------|--------------|--------------|
| OUTDOOR TEM. ° F.   | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH  | TOTAL WATTS  |
| 75  | 36,672        | 26,250        | 10,422       | 2,300        |
| 80  | 36,220        | 26,370        | 9,850        | 2,430        |
| 85  | 35,763        | 26,490        | 9,273        | 2,550        |
| 90  | 34,980        | 26,250        | 8,740        | 2,690        |
| <b>95</b>   | <b>34,200</b> | <b>26,000</b> | <b>8,200</b> | <b>2,830</b> |
| 100   | 33,240        | 25,630        | 7,610        | 2,980        |
| 105   | 32,289        | 25,260        | 7,029        | 3,130        |
| 110   | 31,420        | 25,370        | 6,050        | 3,310        |
| 115   | 30,545        | 25,470        | 5,075        | 3,490        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB   |               |               |              |              |
| <b>95</b>   | <b>32,980</b> | <b>25,410</b> | <b>7,570</b> | <b>2,830</b> |

| GSXC704810A*+CA*T4961*4A*+EEP - HIGH STAGE<br>CONDITIONS: 80 °F IBD, 67 °F IWB @ 1525 CFM |               |               |               |              |
|---|---------------|---------------|---------------|--------------|
| OUTDOOR TEM. ° F.   | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH   | TOTAL WATTS  |
| 75  | 50,920        | 35,310        | 15,610        | 3,130        |
| 80  | 50,300        | 35,460        | 14,840        | 3,310        |
| 85  | 49,670        | 35,610        | 14,060        | 3,480        |
| 90  | 48,600        | 35,270        | 13,330        | 3,670        |
| <b>95</b>   | <b>47,520</b> | <b>34,930</b> | <b>12,590</b> | <b>3,850</b> |
| 100   | 46,210        | 34,440        | 11,780        | 4,060        |
| 105   | 44,900        | 33,940        | 10,960        | 4,270        |
| 110   | 43,700        | 34,060        | 9,650         | 4,520        |
| 115   | 42,500        | 34,170        | 8,330         | 4,770        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB   |               |               |               |              |
| <b>95</b>   | <b>45,850</b> | <b>34,140</b> | <b>11,710</b> | <b>3,860</b> |


| GSXC706010A*+CA*T4961*4A*+EEP - HIGH STAGE<br>CONDITIONS: 80 °F IBD, 67 °F IWB @ 1680 CFM |               |               |               |              |
|---|---------------|---------------|---------------|--------------|
| OUTDOOR TEM. ° F.   | TOTAL BTUH    | SENSIBLE BTUH | LATENT BTUH   | TOTAL WATTS  |
| 75  | 61,150        | 41,840        | 19,310        | 3,720        |
| 80  | 60,410        | 42,010        | 18,400        | 3,940        |
| 85  | 59,660        | 42,180        | 17,480        | 4,160        |
| 90  | 58,380        | 41,780        | 16,600        | 4,400        |
| <b>95</b>   | <b>57,100</b> | <b>41,380</b> | <b>15,720</b> | <b>4,640</b> |
| 100   | 55,540        | 40,800        | 14,750        | 4,910        |
| 105   | 53,980        | 40,210        | 13,770        | 5,170        |
| 110   | 52,550        | 40,340        | 12,210        | 5,490        |
| 115   | 51,120        | 40,470        | 10,650        | 5,800        |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB   |               |               |               |              |
| <b>95</b>   | <b>55,110</b> | <b>40,450</b> | <b>14,660</b> | <b>4,650</b> |

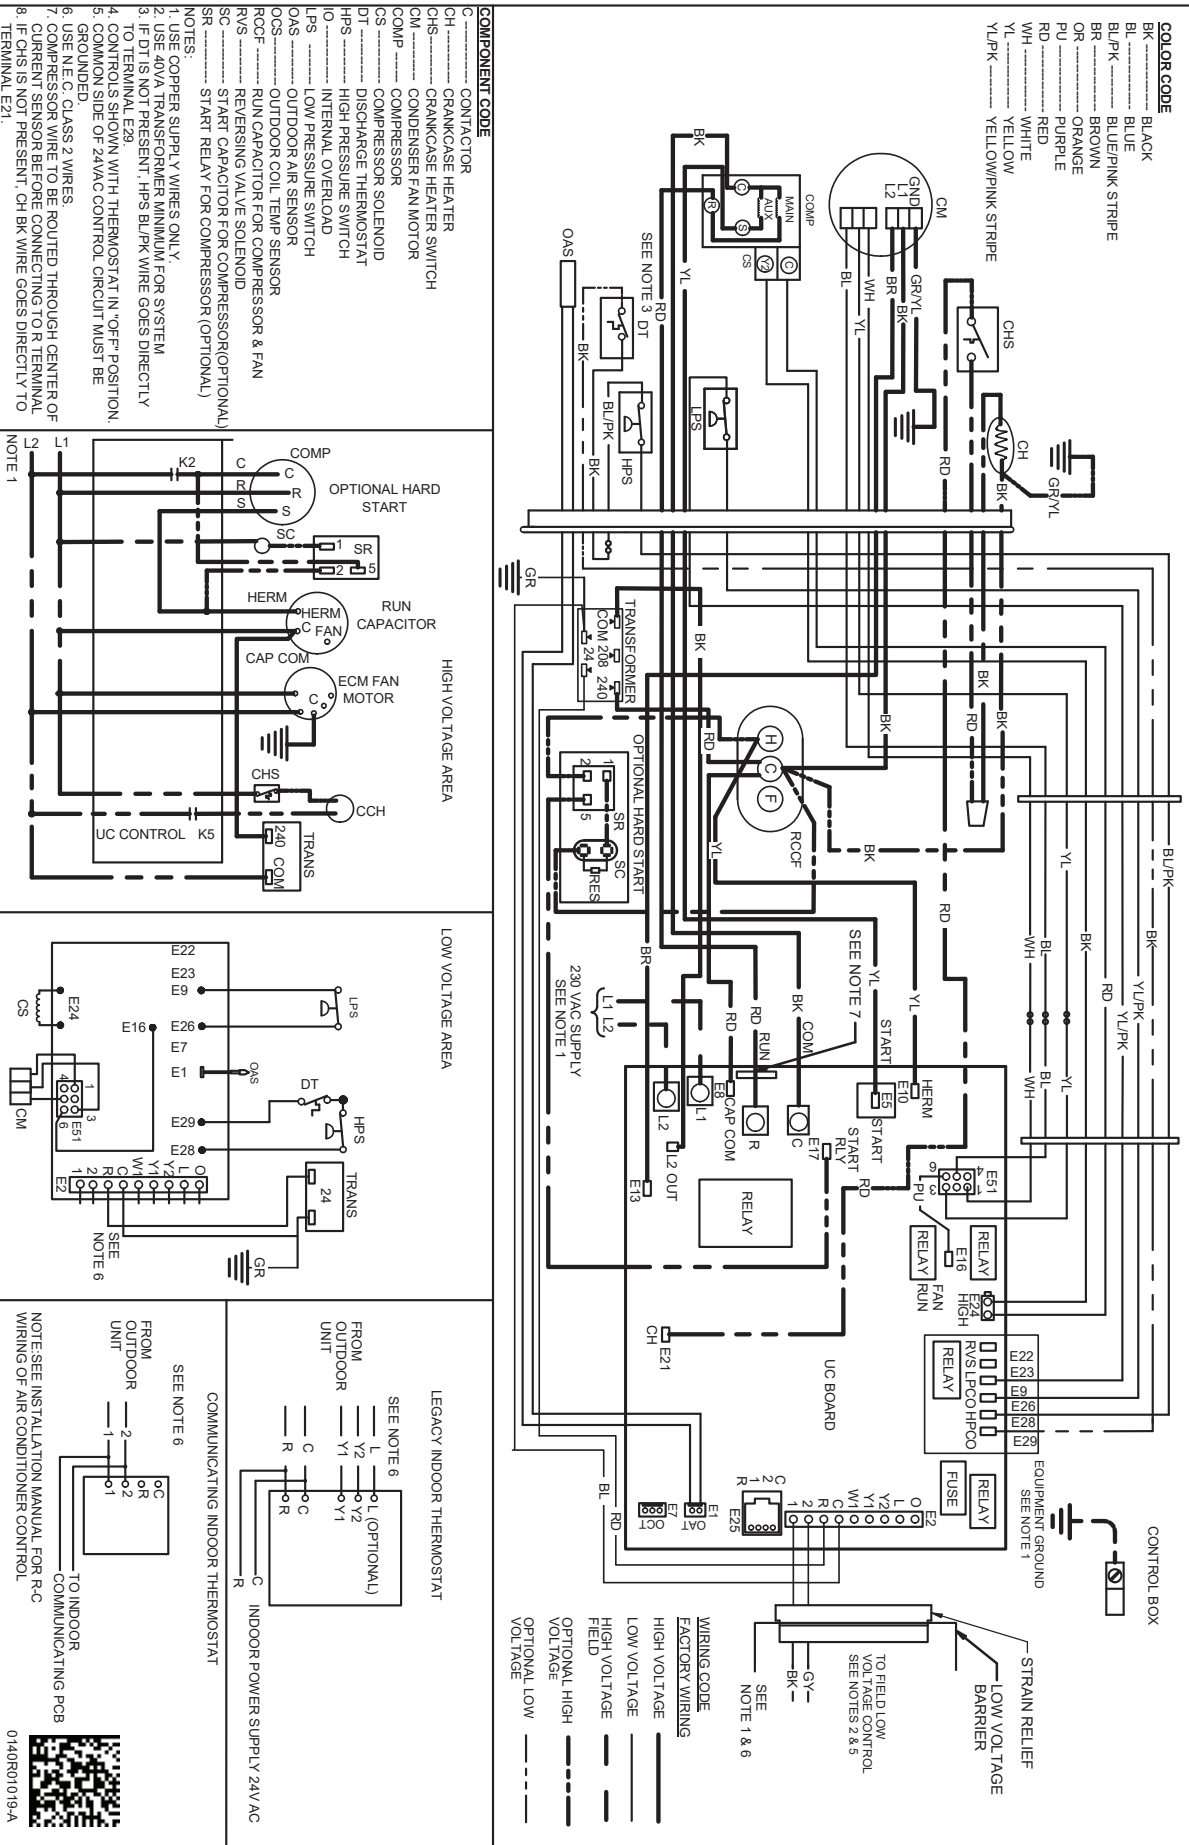

**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

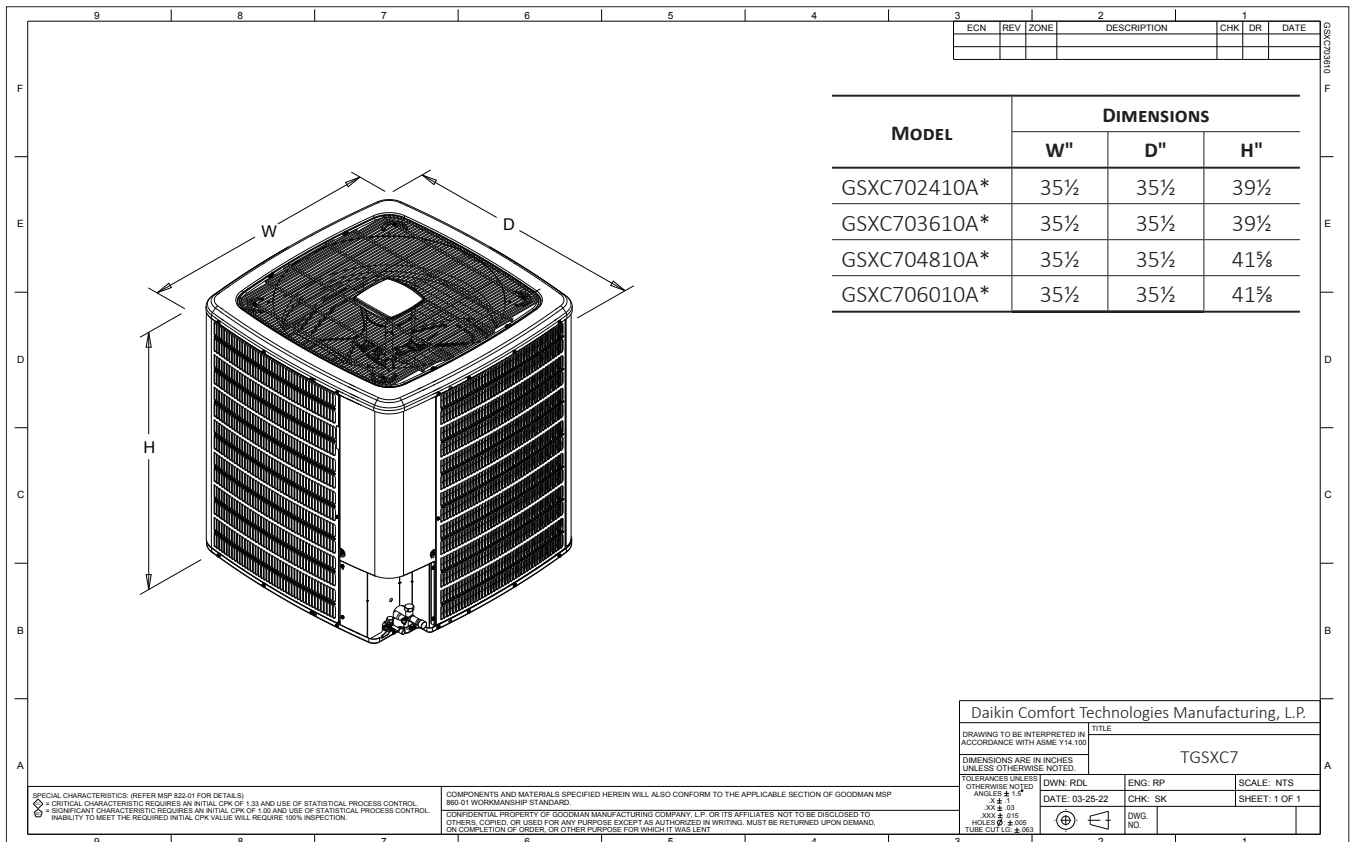

ACCESSORIES

| MODEL                     | DESCRIPTION                           | GSXC7 02410A* | GSXC7 03610A* | GSXC7 04810A* | GSXC7 06010A* |
|---------------------------|---------------------------------------|---------------|---------------|---------------|---------------|
| ABK-20                    | Anchor Bracket Kit ^                  | X             | X             | X             | X             |
| ASC-01                    | Anti-Short Cycle Kit                  | X             | X             | X             | X             |
| CSR-U-1                   | Hard-start Kit                        | X             | X             |               |               |
| CSR-U-2                   | Hard-start Kit                        |               |               | X             |               |
| CSR-U-3                   | Hard-start Kit                        |               |               |               | X             |
| FSK01A <sup>1</sup>       | Freeze Protection Kit                 | X             | X             | X             | X             |
| LSK02A <sup>2</sup>       | Liquid Line Solenoid Kit              | X             | X             | X             | X             |
| OT18-60A                  | Outdoor Thermostat/Lockout Thermostat | X             | X             | X             | X             |
| TXV-FX-KX-2T <sup>2</sup> | TXV Kit                               | X             |               |               |               |
| TXV-FX-KX-3T <sup>2</sup> | TXV Kit                               |               | X             |               |               |
| TXV-FX-KX-5T <sup>2</sup> | TXV Kit                               |               |               | X             | X             |

<sup>^</sup> Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Condensing units and heat pumps with reciprocating or rotary compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.

**All AHRI system ratings are accessible in the System Configurator tool via PartnerLink.**

